

Features

- Wide Supply Voltage: 4.5 V to 36 V
- Internal Power FET : 85 mΩ and 45 mΩ
- 0.6-V Reference Voltage with 2% Accuracy
- High-Efficiency Synchronous-Mode Operation
- 400-kHz Fixed Switching Frequency
- Low 2-μA Shutdown, 90-μA Quiescent Current
- Forced-PWM Mode
- Internal 2-ms Soft-start Timer
- Internal Loop Compensation
- Over-Current Protection with Hiccup Mode
- Output Over-Voltage Protection
- Thermal Shutdown
- Small Outline Package TSOT23-6
- -40°C to 125°C Operation Ambient Temperature Range

Applications

- 12-V, 24-V Isolated Power Supply
- Industrial Applications
- General Purpose

Description

The TPP38003 regulator is a low-cost, efficient, isolated bias regulator. This high-voltage regulator contains two 42-V 3-A N-channel MOSFET switches - a high-side buck switch and a low-side synchronous switch. The Peak Current Mode control scheme employed in the TPP38003 device requires no external loop compensation and provides excellent transient response with fixed switching frequency. The device also has over-current protection and over-temperature protection to improve system robustness.

The device is available in the 6-pin TSOT23-6 package with the support of a wide operation ambient temperature range from -40 °C to 125 °C.

Typical Application Circuit

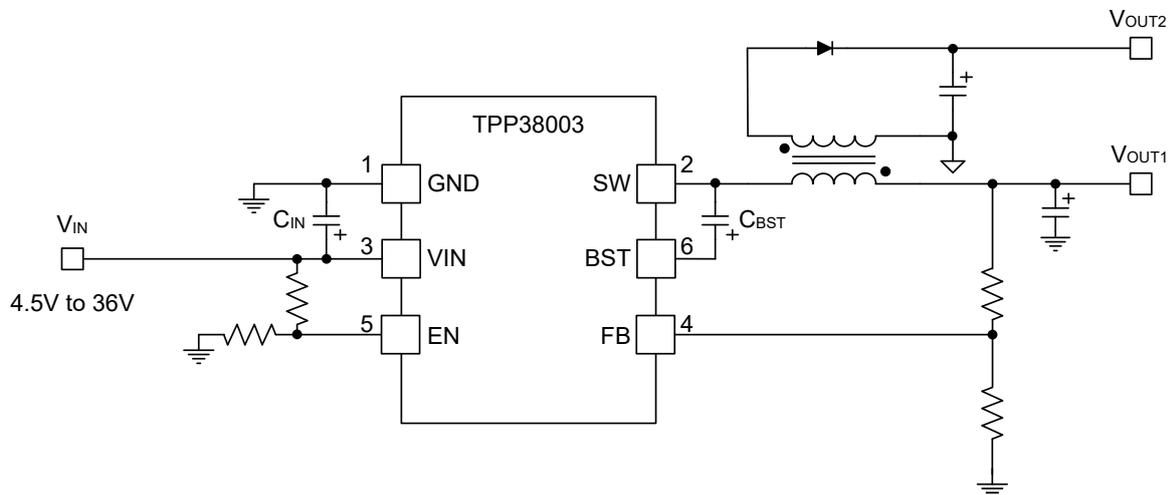


Table of Contents

Features	1
Applications	1
Description	1
Typical Application Circuit	1
Product Family Table	3
Revision History	3
Pin Configuration and Functions	4
Specifications	5
Absolute Maximum Ratings ⁽¹⁾	5
ESD, Electrostatic Discharge Protection.....	5
Recommended Operating Conditions.....	6
Thermal Information.....	6
Electrical Characteristics.....	7
Typical Performance Characteristics.....	9
Detailed Description	11
Overview.....	11
Functional Block Diagram.....	11
Feature Description.....	11
Application and Implementation	14
Application Information	14
Typical Application.....	14
Layout	18
Layout Guideline.....	18
Layout Recommendations.....	18
Tape and Reel Information	19
Package Outline Dimensions	20
TSOT23-6.....	20
Order Information	21
IMPORTANT NOTICE AND DISCLAIMER	22

36-V Input, 3-A Isolated Buck Voltage Regulator**Product Family Table**

Order Number	Switching Frequency (kHz)	Light Load Mode
TPP38003-T6TR	400 kHz	Forced-PWM Mode

Revision History

Date	Revision	Notes
2024-04-22	Rev.A.0	Initial release

Pin Configuration and Functions

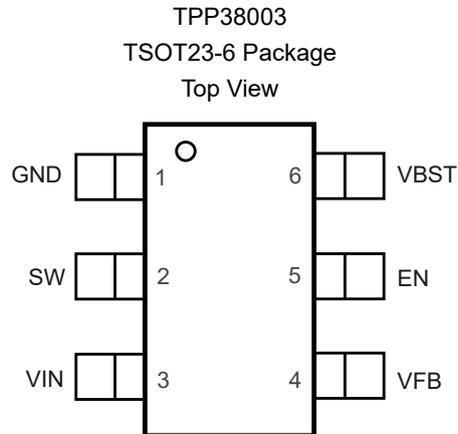


Table 1. Pin Functions: TPP38003

Pin No.	Pin Name	I/O	Description
1	GND	G	Ground pin. Power and controller circuit ground. Use a star connection to the GND pin with good contact.
2	SW	O	Switching node pin. Voltage switching between the high-side FET and the low-side FET.
3	VIN	P	Supply input pin. Connect decoupling $2 \times 10\text{-}\mu\text{F}$ and $1 \times 0.1\text{-}\mu\text{F}$ capacitors between VIN and GND pins.
4	VFB	I	Voltage feedback pin. Connect to the output voltage with a feedback resistor divider.
5	EN	I	Enable input. Active high. Internal weak pull-up.
6	VBST	I	High-side MOSFET gate supply pin. Connect $0.1\text{-}\mu\text{F}$ between VBST and SW pins.

36-V Input, 3-A Isolated Buck Voltage Regulator
Specifications
Absolute Maximum Ratings ⁽¹⁾

Parameter		Min	Max	Unit
V _{IN}	Supply Voltage	-0.3	42	V
SW	Switching Node Voltage	-0.3	V _{IN} + 0.3	V
SW	Switching Node Voltage, 20 ns	-5	42	V
SW	Switching Node Voltage, 50 ns	-3	42	V
VBST-SW	Bootstrap Voltage	-0.3	6	V
FB	Feedback Voltage	-0.3	6	V
EN	Enable Input	-0.3	42	V
T _J	Maximum Junction Temperature		150	°C
T _A	Operating Temperature Range	-40	125	°C
T _{STG}	Storage Temperature Range	-65	150	°C
T _L	Lead Temperature (Soldering 10 sec)		260	°C

- (1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.
- (2) The inputs are protected by ESD protection diodes to each power supply. If the input extends more than 300 mV beyond the power supply, the input current should be limited to less than 10 mA.
- (3) A heat sink may be required to keep the junction temperature below the absolute maximum. This depends on the power supply voltage and how many amplifiers are shorted. Thermal resistance varies with the amount of PC board metal connected to the package. The specified values are for short traces connected to the leads.

ESD, Electrostatic Discharge Protection

Parameter		Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	2	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 ⁽²⁾	1.5	kV

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

36-V Input, 3-A Isolated Buck Voltage Regulator**Recommended Operating Conditions**

Parameter		Min	Max	Unit
V _{IN}	Supply Voltage	4.5	36	V
V _{EN}	Enable Input Voltage	0	36	V
V _{FB}	Feedback Input Voltage	0	5.5	V
V _{BST} —V _{SW}	Bootstrap Voltage	0	5.5	V
V _{SW}	Switching Node Voltage	0	V _{IN}	V
T _J	Operating Junction Temperature	-40	150	°C

Thermal Information

Package Type	θ_{JA}	θ_{JC}	Unit
TSOT23-6	100	44.7	°C/W

36-V Input, 3-A Isolated Buck Voltage Regulator
Electrical Characteristics

 All test conditions: $V_{IN} = 12\text{ V}$, $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$, unless otherwise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Power Supply						
V_{IN}	Supply Voltage Range		4.5		36	V
I_Q	Operating Supply Current	Non-switching, $EN = 5\text{ V}$, $V_{FB} = 1\text{ V}$		90		μA
I_{QSD}	Shutdown Supply Current	$EN = \text{GND}$		2		μA
V_{UVLO_rising}	UVLO Rising Threshold		3.9	4.2	4.4	V
$V_{UVLO_falling}$	UVLO Falling Threshold		3.7	3.8	4.1	V
Enable						
V_{ENH}	EN Input Rising Threshold			1.28	1.35	V
V_{ENL}	EN Input Falling Threshold		1	1.17		V
I_{EN_L}	EN Current, $EN = L$	$V_{EN} = 0.9\text{ V}$	0.65	1.04	1.5	μA
I_{EN_H}	EN Current, $EN = H$	$V_{EN} = 1.5\text{ V}$	3.6	4.3	5.2	μA
I_{EN_HYS}	EN Hysteresis Current	$V_{EN} = 1.5\text{ V}$		3.3		μA
Feedback and Power Stage						
V_{FB}	V_{FB} Feedback Voltage		588	600	612	mV
$R_{ds(on)_HSD}$	High-side FET On-resistance	$I_{SW} = 1\text{ A}$		85		m Ω
$R_{ds(on)_LSD}$	Low-side FET On-resistance	$I_{SW} = 1\text{ A}$		45		m Ω
f_{SW}	Switching Frequency		350	400	450	kHz
t_{ss}	Soft-start Time			2		ms
t_{ss_done}	Soft-start Transition Time		14	18	24	ms
I_{skip}	Pulse-skip Mode Peak Inductor Current Threshold	$V_{IN} = 12\text{ V}$, $V_{OUT} = 5\text{ V}$, $L = 10\text{ }\mu\text{H}$		500		mA
Current Limit						
I_{Limit_HS}	High-side Current Limit	Inductor peak current	4	4.9	5.6	A
I_{Limit_LS}	Low-side Current Limit	Inductor valley current	2.9	3.7	4.8	A
$I_{Limit_LS_neg}$	Negative Low-side Current Limit			3		A
Diagnostics and Protection						
$V_{FB_UVP_rising}$	FB Hiccup Protection Rising Ratio			33		%
$V_{FB_UVP_falling}$	FB Hiccup Protection Falling Ratio			40		%
$V_{FB_OVP_rising}$	FB Over-voltage Protection Rising Ratio			108		%
$V_{FB_OVP_falling}$	FB Over-voltage Protection Falling Ratio			107		%

36-V Input, 3-A Isolated Buck Voltage Regulator

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
t _{HIC_wait}	Hiccup Protection Wait Time			128		Cycles
t _{HIC_restart}	Hiccup Protection Restart Time			60		ms
Thermal Shutdown						
T _{SD}	Thermal Shutdown Temperature			160		°C
T _{SD_hys}	Thermal Hysteresis			10		°C

36-V Input, 3-A Isolated Buck Voltage Regulator

Typical Performance Characteristics

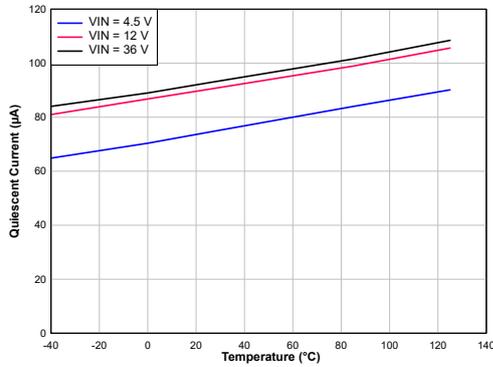


Figure 1. Quiescent Current vs. Supply Voltage

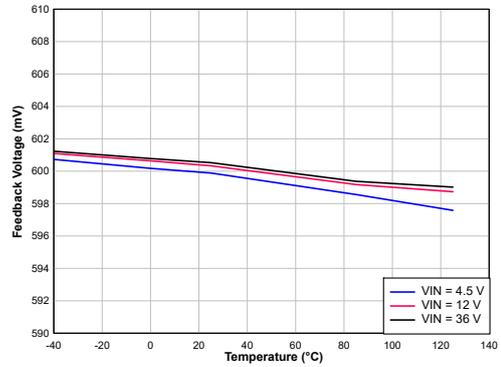


Figure 2. Reference Voltage vs. Junction Temperature

$V_{IN} = 12\text{ V}$

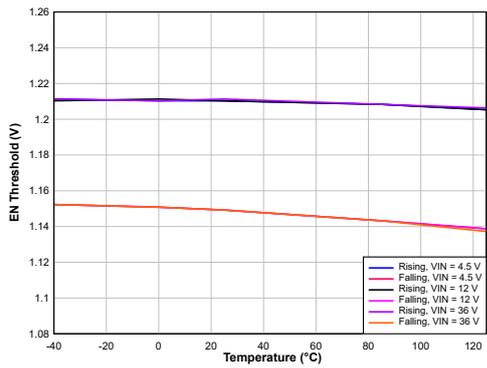


Figure 3. EN Threshold vs. Junction Temperature

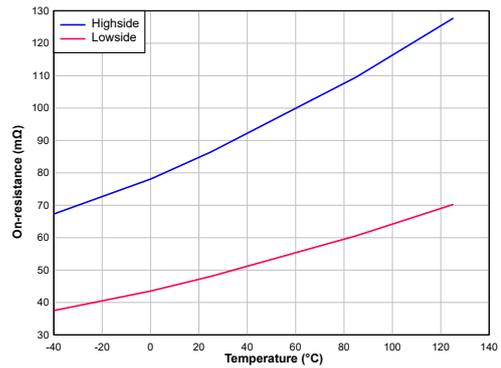


Figure 4. On-Resistance vs Temperature

$V_{IN} = 12\text{ V}, I_{OUT} = 0.5\text{ A}$

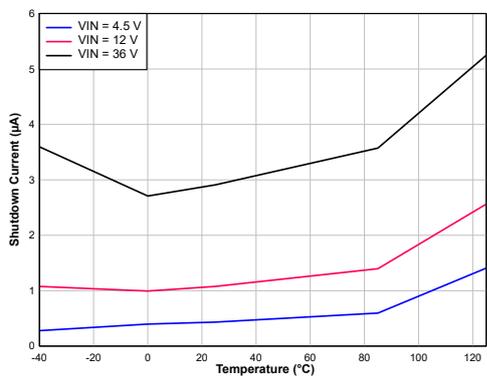


Figure 5. Shutdown Current vs Junction Temperature

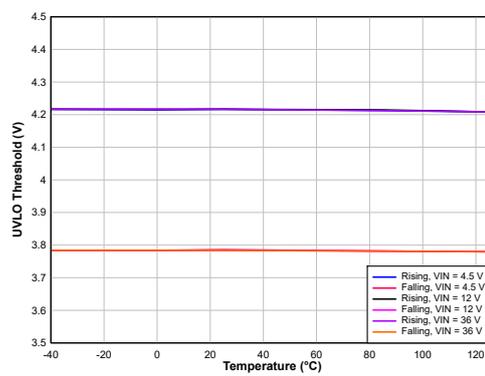


Figure 6. UVLO Threshold vs Temperature

36-V Input, 3-A Isolated Buck Voltage Regulator

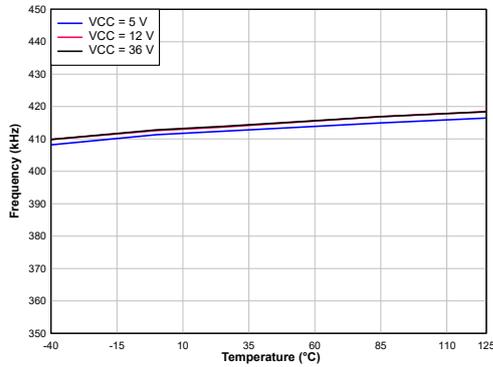


Figure 7. Switching Frequency vs. Temperature

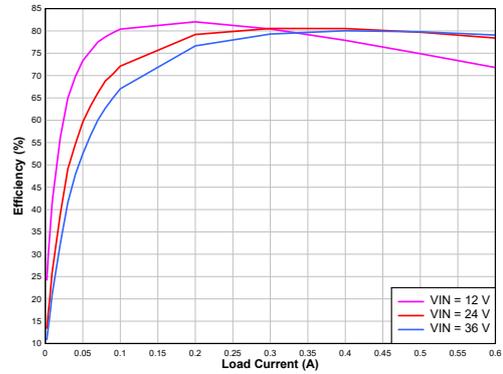


Figure 8. Efficiency vs. Output Current

$V_{OUT} = 5\text{ V}$, with 4.3-k Ω dummy load

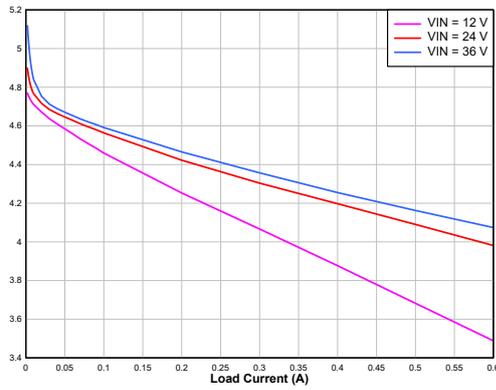


Figure 9. Load Regulation

$V_{OUT} = 5\text{ V}$, with 4.3-k Ω dummy load

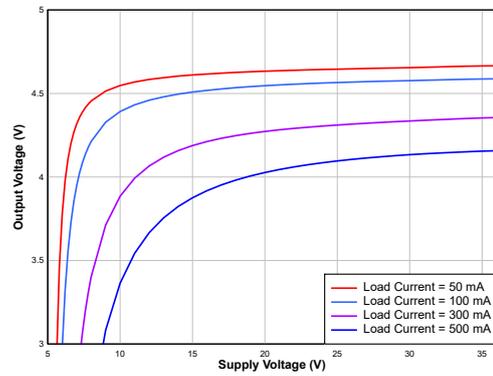


Figure 10. Line Regulation

$V_{OUT} = 5\text{ V}$, with 4.3-k Ω dummy load

36-V Input, 3-A Isolated Buck Voltage Regulator

Detailed Description

Overview

The TPP38003 is a 3-A synchronous step-down converter for low-cost, high-efficiency isolated bias supply. The current mode control topology provides a fast transient response and supports low ESR output capacitors, such as specialty polymer capacitors and multi-layer ceramic capacitors, without extra compensation circuitry.

Functional Block Diagram

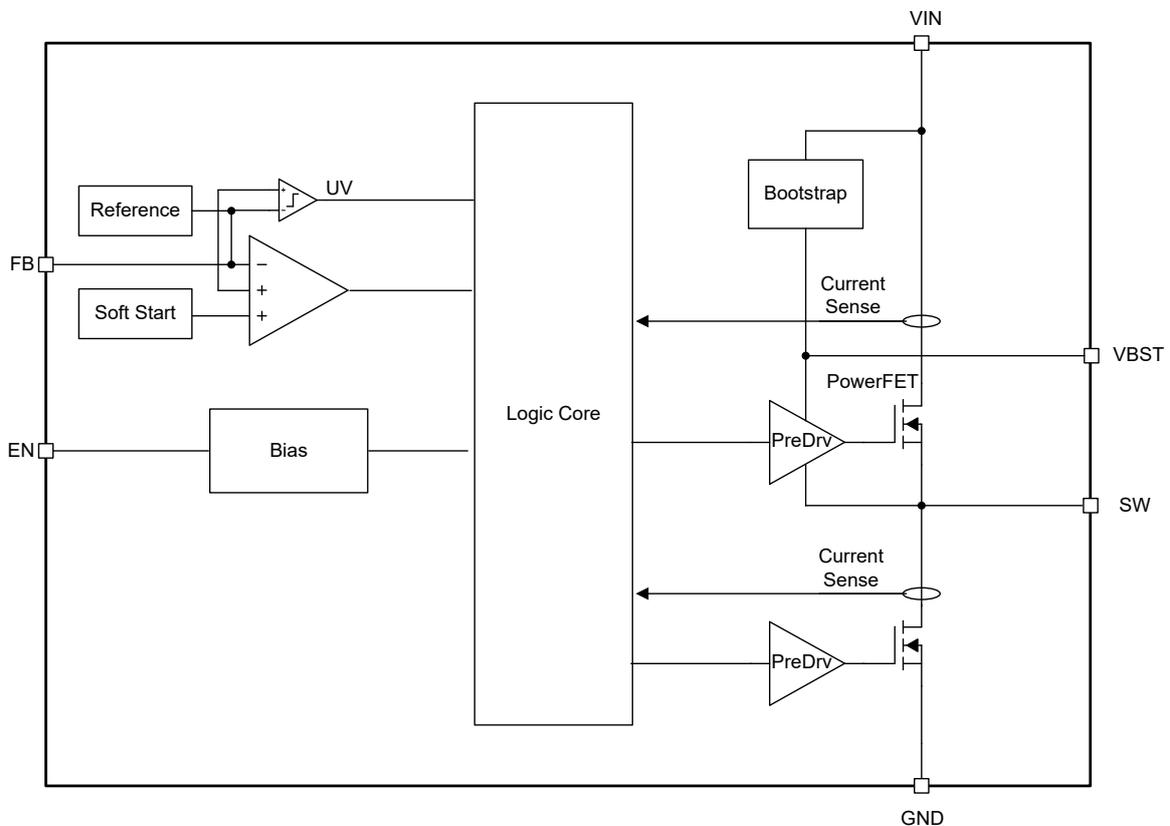


Figure 11. Functional Block Diagram

Feature Description

Current Mode Control

The TPP38003 uses the current mode control topology. The current mode topology supports fixed frequency operation thus optimizing ripple performance. With integrated low $R_{ds(on)}$, the device can achieve high efficiency in a small physical footprint.

Switching Frequency

TPP388003 supports both 400-kHz switching frequency.

36-V Input, 3-A Isolated Buck Voltage Regulator

Forced-PWM Mode

The TPP38003 has a forced-PWM mode to support isolated buck applications. When the inductor ripple valley current reaches zero, the device will automatically enter the forced-PWM mode with a fixed switching frequency. In this mode, the negative current limit of low-side FET is enabled.

Enable Input

The device EN has two current sources to pull EN up high. I_{EN} and I_{HYS} . When EN is low, the I_{EN} is enabled as I_{EN_L} . When EN rises above the threshold and turns hysteresis current I_{EN_SYSON} , the total current is I_{EN_H}

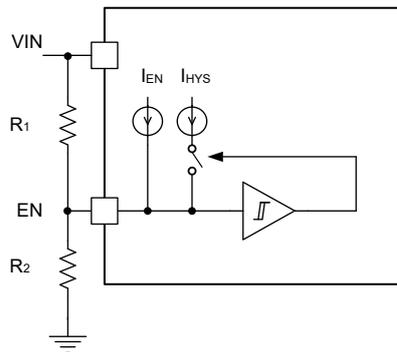


Figure 12. EN Block Diagram

The EN threshold can be set via the below equations

$$R_1 = \frac{V_{ENL}(V_{IN_START} - V_{ENH}) - V_{ENH}(V_{IN_STOP} - V_{ENL})}{V_{ENH} \cdot I_{ENH} - V_{ENL} \cdot I_{ENL}} \quad (1)$$

$$R_2 = \frac{V_{ENH}}{I_{ENL} + \frac{V_{IN_START} - V_{ENH}}{R_1}} \quad (2)$$

Soft-Start with Pre-biased Capability

Once EN becomes high, the device ramps up its internal reference voltage with a fixed 2-ms rising time. When the output capacitor is pre-charged, the soft-start ramp will only enable output switching after the internal reference ramps above the FB voltage.

Over-Current Protection

The device has a cycle-by-cycle current limit. During the OFF state, once overcurrent is detected at the ripple current valley by measuring the low-side FET current, the device keeps the low-side FET OFF until the current falls below the over-current protection (OCP) threshold. The device has negative current and can block reverse current when the reverse inductor current is higher than the threshold.

Output Undervoltage Hiccup Protection

When the device output voltage falls below the hiccup voltage threshold, the device turns into the hiccup mode by turning off the device and restarts after the hiccup timer (typically 60 ms) expires.

To support large output capacitance as large as 1 mF, the device has an extended soft start transition timer. Upon power up, the device gets into soft-start and prevents the device into output under voltage hiccup protection mode until soft start transition time t_{SS_done} is over.

36-V Input, 3-A Isolated Buck Voltage Regulator**Undervoltage Lockout (UVLO) Protection**

Once the input voltage falls below the UVLO threshold, the device is shut off. Once the device recovers above the UVLO threshold, the device returns to normal operation.

Over-Temperature Shutdown

Once the junction temperature rises across the internal over-temperature shutdown threshold, the device shuts off and recovers when the temperature falls below the threshold with hysteresis.

Application and Implementation

Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

Application Information

As an easy-to-use isolated buck voltage regulator, the TPP38002 usually converts a higher input voltage to the desired output voltage set by the VFB resistor divider. With a transformer, the device can generate a primary side output voltage together with a secondary output voltage simultaneously. The below section depicts a simplified design flow of circuitry for the TPP38002.

Typical Application

The isolated buck circuit based on TPP38003 is listed below. The primary side voltage can be set via FB resistor divider, and the secondary side voltage can be set via transformer ratio. Diode drop also needs to be considered.

3PEAK recommends adding a minimal resistive load on the secondary side output to avoid high voltage during light load scenarios.

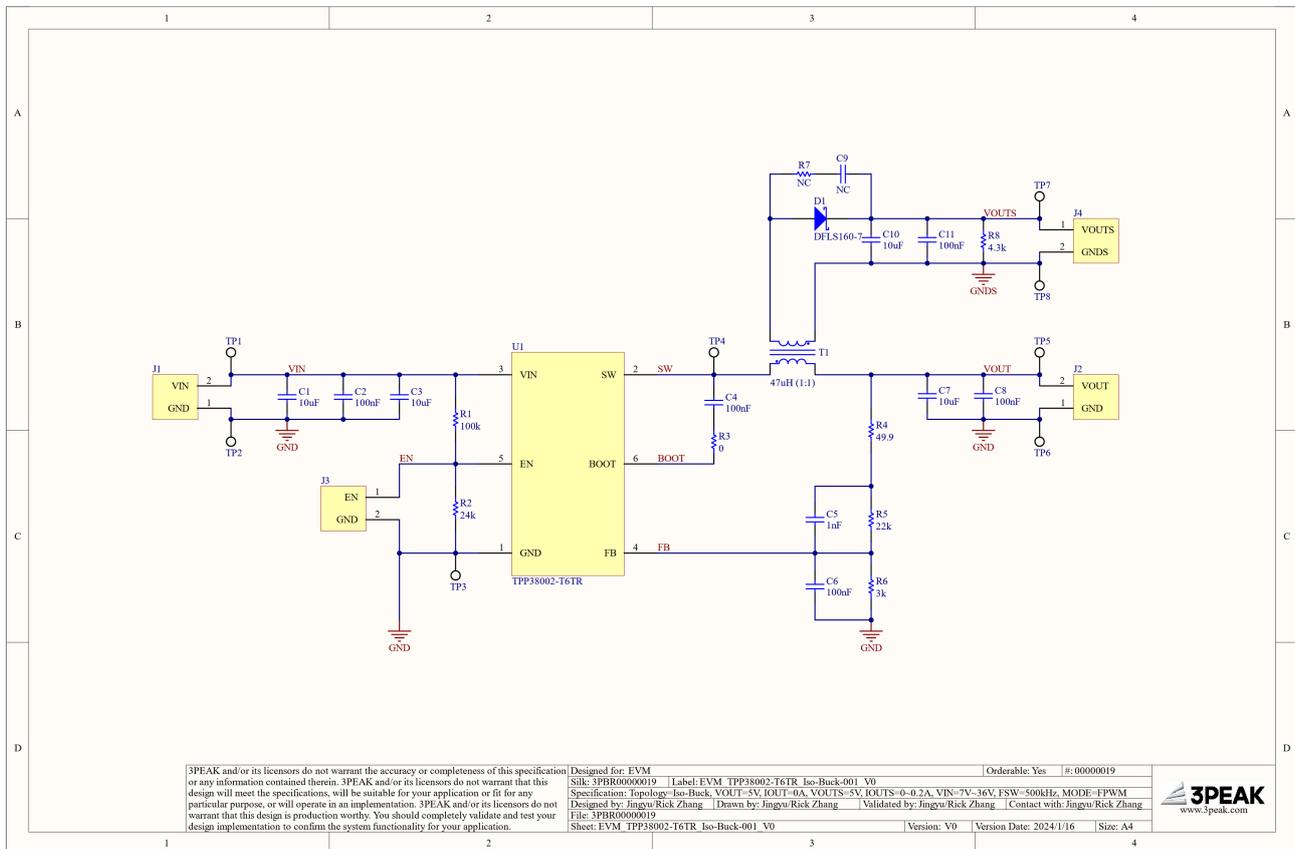


Figure 13. Typical Application Circuit

36-V Input, 3-A Isolated Buck Voltage Regulator
Component Selection

Designator	Value	Quantity	Part No.	Package	Manufacturer	Description
PCB		1	3PBR00000019		Any	Printed Circuit Board
U1	TPP38003-T6TR	1	TPP38003-T6TR	SOT23-6	3PEAK	Iso-Buck Converter, 36V, 3A
C1	10uF	1	GRM31CD71H106 KE11	1206	muRata	Capacitor, 10uF, 50VDC, X7T, ±10%
C2	100nF	1	GGD21BR71H104 KA02	0805	muRata	Capacitor, 100nF, 50VDC, X7R, ±10%
C3	10uF	1	GRM31CD71H106 KE11	1206	muRata	Capacitor, 10uF, 50VDC, X7T, ±10%
C4	100nF	1	GRM188R71C104 KA01	0603	muRata	Capacitor, 100nF, 16VDC, X7R, ±10%
C5	1nF	1	GRM1885C1H102 JA01	0603	muRata	Capacitor, 1nF, 50VDC, C0G, ±5%
C6	100nF	1	GRM188R71H104 KA93	0603	muRata	Capacitor, 100nF, 50VDC, X7R, ±10%
C7	10uF	1	GCM21BC71C106 KE36	0805	muRata	Capacitor, 10uF, 16VDC, X7S, ±10%
C8	100nF	1	GGD21BR71H104 KA02	0805	muRata	Capacitor, 100nF, 50VDC, X7R, ±10%
C9	NC	0				
C10	10uF	1	GCM21BC71C106 KE36	0805	muRata	Capacitor, 10uF, 16VDC, X7S, ±10%
C11	100nF	1	GGD21BR71H104 KA02	0805	muRata	Capacitor, 100nF, 50VDC, X7R, ±10%
R1	100K	1	ARG03FTC1003	0603	Viking	Resistor, 100K, ±1%, 0.1W
R2	24K	1	ARG03FTC2402	0603	Viking	Resistor, 24K, ±1%, 0.1W
R3	0	1	ERJ-3GEY0R00V	0603	Panasonic	Resistor, 0Ω, 5%, 0.1W
R4	49.9	1	ARG03FTC49R9	0603	Viking	Resistor, 49.9Ω, ±1%, 0.1W
R5	22K	1	ARG03FTC2202	0603	Viking	Resistor, 22K, ±1%, 0.1W
R6	3K	1	ARG03FTC3001	0603	Viking	Resistor, 3K, ±1%, 0.1W
R7	NC	0				
R8	4.3K	1	ARG03FTC4301	0603	Viking	Resistor, 4.3K, ±1%, 0.1W
T1	47uH	1	MSD1038-473ME	10mm×4mm×10mm	Coilcraft	Coupled Inductor, 47uH, 1:1, 2250VRms, 2.2A
J1		1	691101710002	Terminal Block, 5.08mm, 2×1, Tin, TH	Würth Elektronik eiSos	Terminal Block, 5.08mm, 2×1, Tin, TH

36-V Input, 3-A Isolated Buck Voltage Regulator

Designator	Value	Quantity	Part No.	Package	Manufacturer	Description
J2		1	691101710002	Terminal Block, 5.08mm, 2×1, Tin, TH	Wurth Elektronik eiSos	Terminal Block, 5.08mm, 2×1, Tin, TH
J3		1	61300211121	Header, 2.54mm, 2×1, Tin, TH	Wurth Elektronik eiSos	Header, 2.54mm, 2×1, Tin, TH
J4		1	691101710002	Terminal Block, 5.08mm, 2×1, Tin, TH	Wurth Elektronik eiSos	Terminal Block, 5.08mm, 2×1, Tin, TH
TP1		1	5010	Red Multipurpose Testpoint	Keystone	Test Point, Multipurpose, Red, TH
TP2		1	5011	Black Multipurpose Testpoint	Keystone	Test Point, Multipurpose, Black, TH
TP3		1	5011	Black Multipurpose Testpoint	Keystone	Test Point, Multipurpose, Black, TH
TP4		1	5013	Black Multipurpose Testpoint	Keystone	Test Point, Multipurpose, Orange, TH
TP5		1	5010	Red Multipurpose Testpoint	Keystone	Test Point, Multipurpose, Red, TH
TP6		1	5011	Black Multipurpose Testpoint	Keystone	Test Point, Multipurpose, Black, TH
TP7		1	5010	Red Multipurpose Testpoint	Keystone	Test Point, Multipurpose, Red, TH

36-V Input, 3-A Isolated Buck Voltage Regulator


Designator	Value	Quantity	Part No.	Package	Manufacturer	Description
TP8		1	5011	Black Multipurpose Testpoint	Keystone	Test Point, Multipurpose, Black, TH
H1		1	NY PMS 440 0025 PH	Screw	B&F Fastener Supply	Machine Screw, Round, #4-40 x 1/4, Nylon, Philips panhead
H2		1	NY PMS 440 0025 PH	Screw	B&F Fastener Supply	Machine Screw, Round, #4-40 x 1/4, Nylon, Philips panhead
H3		1	NY PMS 440 0025 PH	Screw	B&F Fastener Supply	Machine Screw, Round, #4-40 x 1/4, Nylon, Philips panhead
H4		1	NY PMS 440 0025 PH	Screw	B&F Fastener Supply	Machine Screw, Round, #4-40 x 1/4, Nylon, Philips panhead
H5		1	1902C	Standoff	Keystone	Keystone
H6		1	1902C	Standoff	Keystone	Keystone
H7		1	1902C	Standoff	Keystone	Keystone
H8		1	1902C	Standoff	Keystone	Keystone
Label1	EVM_TPP 38002-T6TR_Iso-Buck-001_V0	1		Adhesive Tape Printed	3PEAK	Topology=Iso-Buck Solution, V OUT=5V, IOU=0A, VOU=5V, IOU=0~0.2A, VIN=7~36V, FSW=500kHz, MODE=FPWM
Labe2	2024/1/19	1		Adhesive Tape Printed	3PEAK	QR Code

Layout


Layout Guideline

- Both input capacitors and output capacitors must be placed on the device pins as close as possible.
- It is recommended to bypass the input pin to ground with a 0.1- μ F bypass capacitor.
- It is recommended to use wide and thick copper to minimize $I \times R$ drop and heat dissipation.
- The exposed pad must be connected to the PCB ground plane directly, the copper area must be as large as possible.

Layout Recommendations


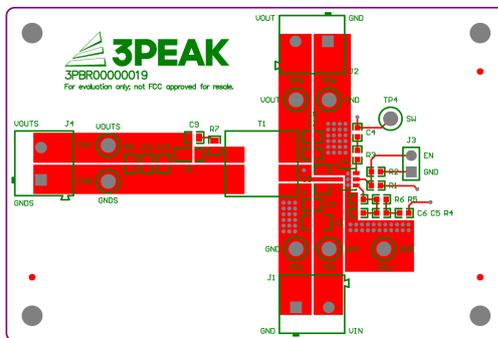


Top Layer

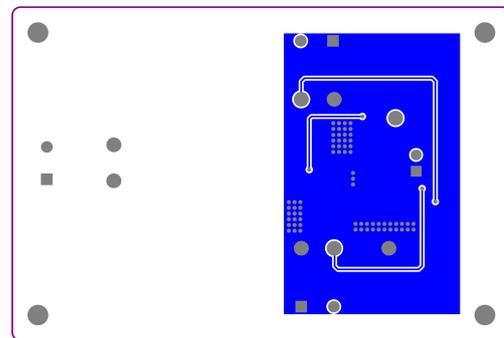

Bottom Layer


Tape and Reel Information

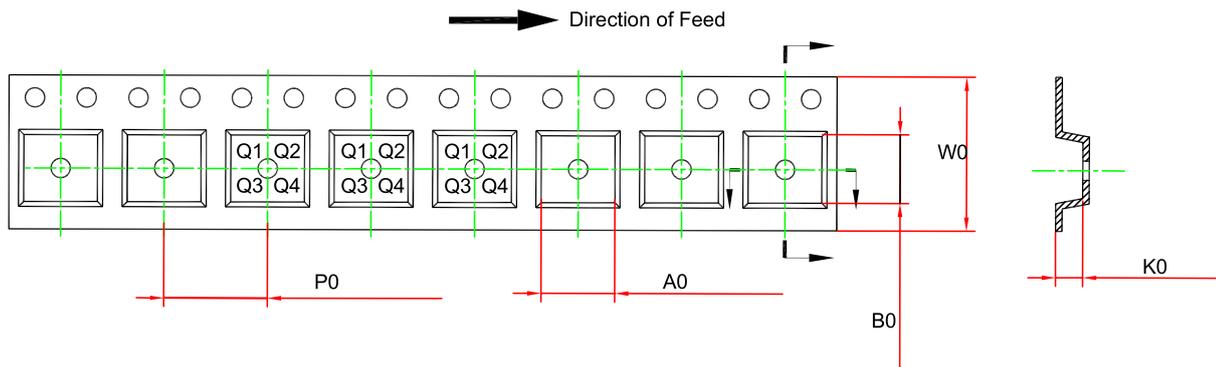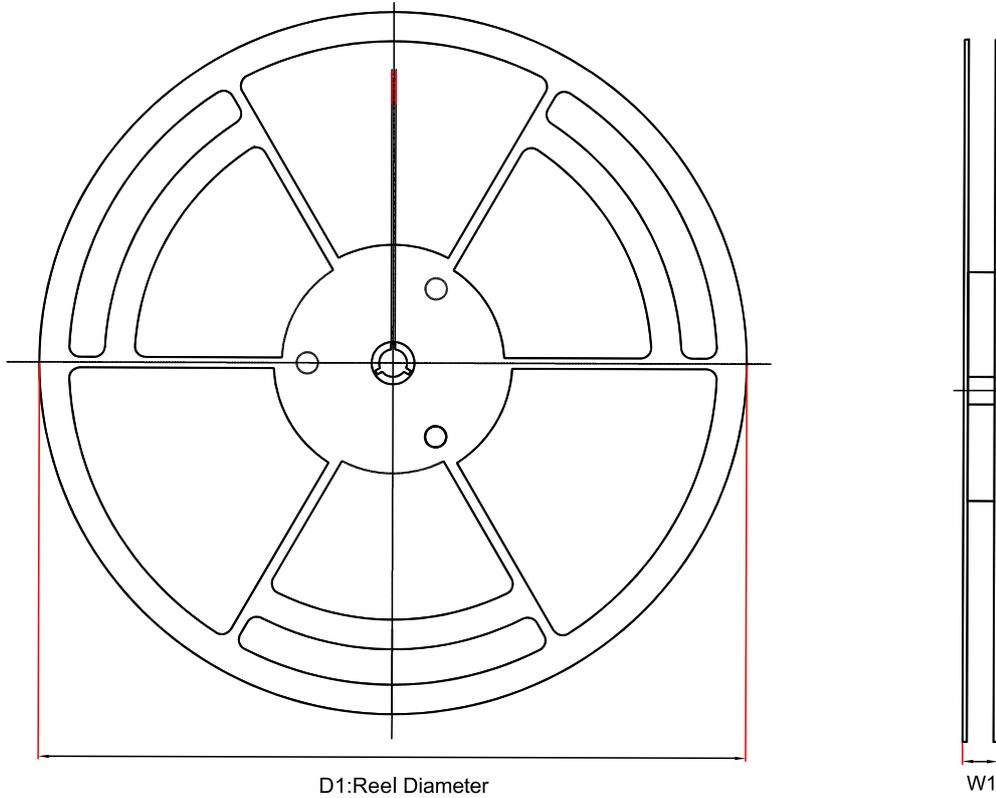

Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPP38003-T6TR	TSOT23-6	178	12.3	3.2	3.05	1.1	4.0	8.0	Q3

Package Outline Dimensions

TSOT23-6

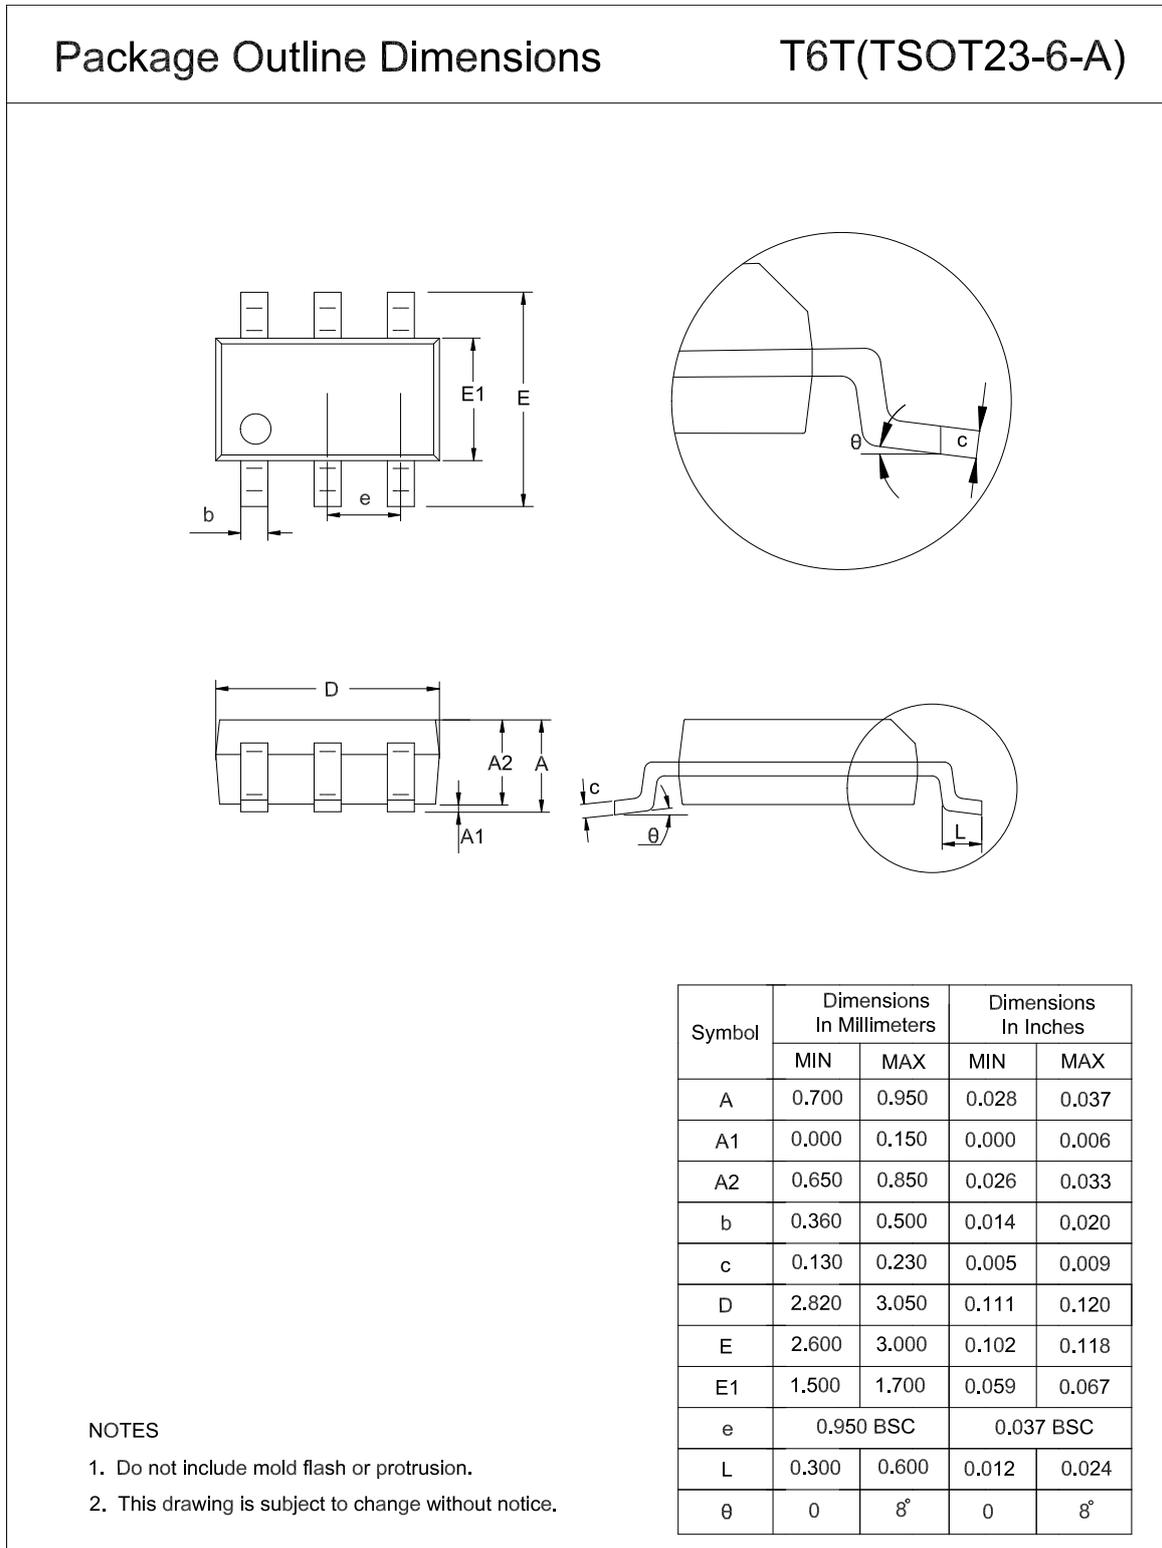

Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPP38003-T6TR	-40 to 125°C	TSOT23-6	383	MSL3	Tape and Reel, 3000	Green

(1) **Green:** 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

IMPORTANT NOTICE AND DISCLAIMER

Copyright© 3PEAK 2012-2024. All rights reserved.

Trademarks. Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

Performance Information. Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

Disclaimer. 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.