

Features

- Gain-bandwidth Product: 10 MHz
- Low Noise: 8.2 nV/ $\sqrt{\text{Hz}}$ (f= 1 kHz)
- Slew Rate: 7 V/ μs
- Offset Voltage: 1 mV (max)
- EMIRR IN+: 88 dB(under 2.4 GHz)
- Low THD+N: 0.0005%
- Supply Range: 2.2 V to 5.5 V
- Supply Current: 1.4 mA/ch
- Low Input Bias Current: 0.3 pA Typical
- Rail-to-Rail I/O
- High Output Current: 70 mA (1.0 V Drop)

Applications

- Sensor Signal Conditioning
- Consumer Audio
- Multi-Pole Active Filters
- Control-Loop Amplifiers
- Communications
- Security
- Scanners


Description

The TP2411, TP2412, and TP2414 are low-cost, single, dual, and quad rail-to-rail output, single-supply amplifiers featuring low offset and input voltages, low-current noise, and wide signal bandwidth. The combination of low offset, low noise, very low input bias currents, and high speed make these amplifiers useful in a wide variety of applications. Filters, integrators, photodiode amplifiers, and high impedance sensors all benefit from this combination of performance features. Audio and other ac applications benefit from the wide bandwidth and low distortion of these devices.

Applications for these amplifiers include power amplifier (PA) controls, laser diode control loops, portable and loop-powered instrumentation, audio amplification for portable devices, and ASIC input and output amplifiers.

The TP2411 is the single-channel version available in 8-pin SOP and 5-pin SOT23 packages. The TP2412 is the dual-channel version available in 8-pin SOP, SOT, TSSOP, and MSOP packages. The TP2414 is the quad-channel version available in 14-pin SOP and TSSOP packages.

Typical Application Circuit

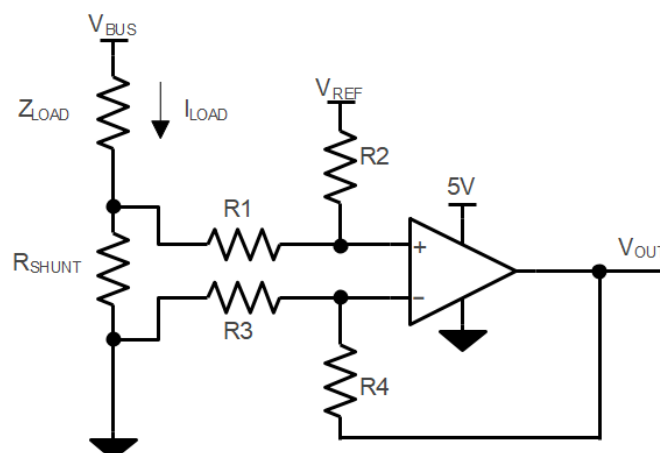

$$V_{\text{OUT}} = (I_{\text{LOAD}} \times R_{\text{SHUNT}}) \times (R_2 / R_1) + V_{\text{REF}}$$

$$\text{When } R_3 = R_1, R_2 = R_4, R_{\text{SHUNT}} \ll R_1$$

Table of Contents

Features	1
Applications	1
Description	1
Typical Application Circuit	1
Revision History	3
Pin Configuration and Functions	4
Specifications	7
Absolute Maximum Ratings ⁽¹⁾	7
ESD, Electrostatic Discharge Protection	7
Thermal Information	7
Electrical Characteristics	8
Typical Performance Characteristics.....	10
Detailed Description	14
Overview.....	14
Functional Block Diagram	14
Application and Implementation	15
Low Side Current Sensing Application	15
Power Supply Recommendations	15
Tape and Reel Information	16
Package Outline Dimensions	17
SOT23-5	17
SOT23-8	18
SOP8	19
MSOP8	20
TSSOP8	21
TSSOP14	22
SOP14	23
Order Information	24
IMPORTANT NOTICE AND DISCLAIMER	25

Revision History

Date	Revision	Notes
2022/04/30	Rev.B.5	Updated order information.
2022/07/18	Rev.B.6	Updated to new document format. Updated package dimensions.
2022/08/09	Rev.B.7	Correct typo error of MSL level, no product change.

Pin Configuration and Functions

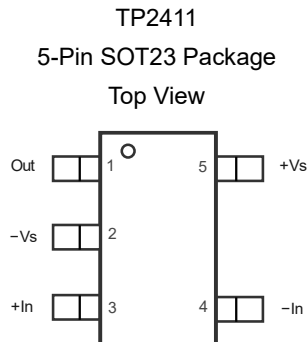


Table 6-1. Pin Functions: TP2411

Pin	Name	I/O	Description
SOT23			
1	Out	Output	Output
2	-Vs		Negative power supply
3	+In	Input	Noninverting input
4	-In	Input	Inverting input
5	+Vs		Positive power supply

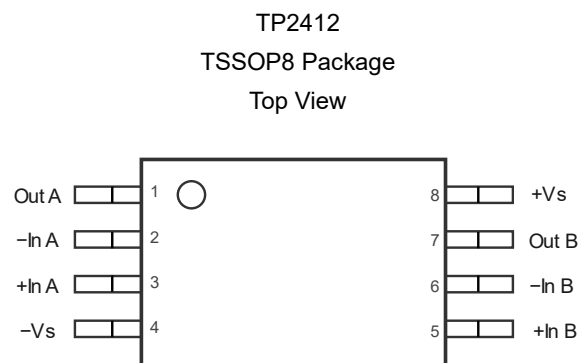
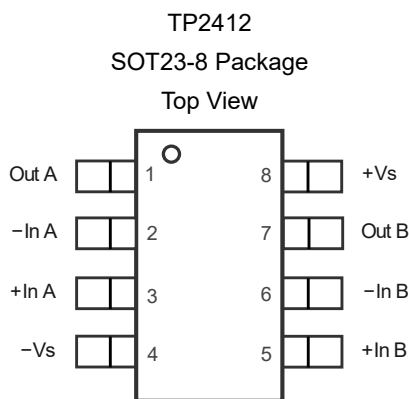
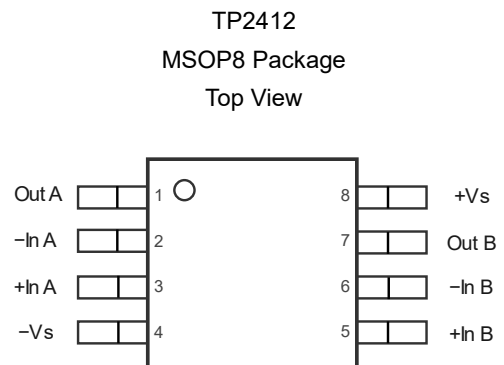
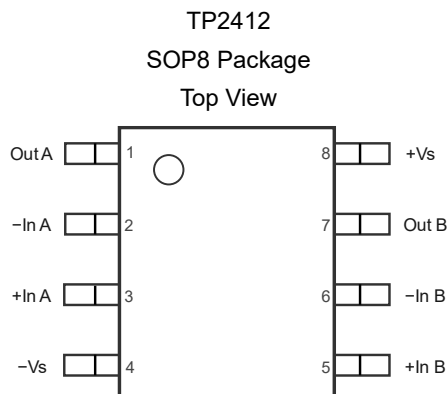


Table 6-2. Pin Functions: TP2412

Pin	Name	I/O	Description
1	Out A	Output	Output
2	-In A	Input	Inverting input
3	+In A	Input	Noninverting input
4	-Vs		Negative power supply
5	+In B	Input	Noninverting input
6	-In B	Input	Inverting input
7	Out B	Output	Output
8	+Vs		Positive power supply

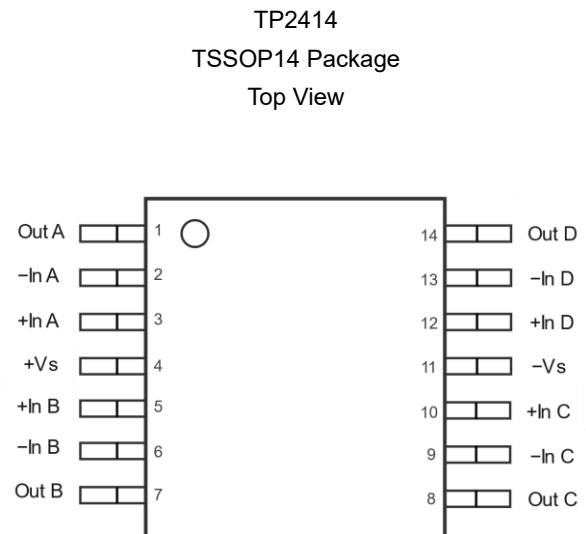
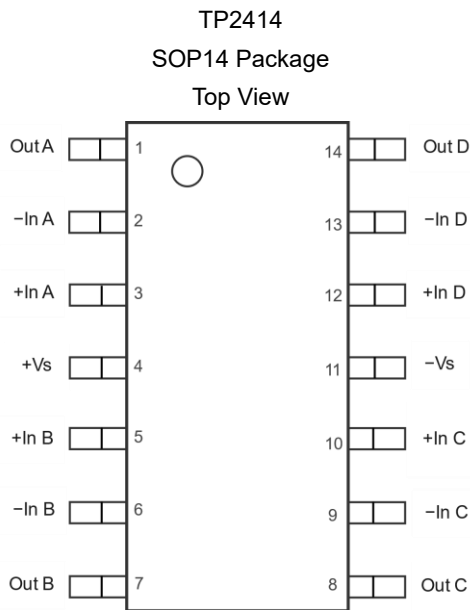


Table 6-3. Pin Functions: TP2414

Pin	Name	I/O	Description
1	Out A	Output	Output
2	-In A	Input	Inverting input
3	+In A	Input	Noninverting input
4	+Vs		Positive power supply
5	+In B	Input	Noninverting input
6	-In B	Input	Inverting input
7	Out B	Output	Output
8	Out C	Output	Output
9	-In C	Input	Inverting input
10	+In C	Input	Noninverting input
11	-Vs		Negative power supply
12	+In D	Input	Noninverting input
13	-In D	Input	Inverting input
14	Out D	Output	Output

Specifications

Absolute Maximum Ratings⁽¹⁾

Parameter		Min	Max	Unit
	Supply Voltage: $V^+ - V^-$ ⁽²⁾		7	V
	Input Voltage	$V^- - 0.3$	$V^+ + 0.3$	V
	Input Current: $+I_{IN}$, $-I_{IN}$ ⁽³⁾	-20	+20	mA
	Output Short-Circuit Duration ⁽⁴⁾		Indefinite	
	Current at Supply Pins	-60	+60	mA
T_J	Maximum Junction Temperature		150	°C
T_A	Operating Temperature Range	-40	125	°C
T_{STG}	Storage Temperature Range	-65	150	°C
T_L	Lead Temperature (Soldering 10 sec)		260	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

(2) The op amp supplies must be established simultaneously, with, or before, the application of any input signals.

(3) The inputs and outputs are protected by ESD protection diodes to the negative power supply. If the input or output extends more than 500 mV beyond the negative power supply, the current should be limited to less than 10 mA.

(4) A heat sink may be required to keep the junction temperature below the absolute maximum. This depends on the power supply voltage and how many comparators are shorted. Thermal resistance varies with the amount of PC board metal connected to the package. The specified values are for short traces connected to the leads.

ESD, Electrostatic Discharge Protection

Symbol	Parameter	Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001	4	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002	1	kV

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Thermal Information

Package Type	θ_{JA}	θ_{JC}	Unit
SOT23-5	250	81	°C/W
SOP8	158	43	°C/W
MSOP8	210	45	°C/W
TSSOP8	191	50	°C/W
SOT23-8	196	70	°C/W
SOP14	120	36	°C/W
TSSOP14	180	35	°C/W

Electrical Characteristics

All test condition is $T_A = 27^\circ\text{C}$. $V_S = 5\text{ V}$, $R_L = 2\text{ k}\Omega$, $C_L = 100\text{ pF}$, unless otherwise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{OS}	Input Offset Voltage	$V_{CM} = V_S/2$	-1	± 0.25	+1	mV
		$V_{CM} = 0\text{ V}$	-1	± 0.25	+1	mV
$V_{OS\ TC}$	Input Offset Voltage Drift	-40°C to 125°C		1		$\mu\text{V}/^\circ\text{C}$
I_B	Input Bias Current	$T_A = 27^\circ\text{C}$		0.3		pA
		$T_A = 85^\circ\text{C}$		150		pA
		$T_A = 125^\circ\text{C}$		300		pA
I_{OS}	Input Offset Current			0.3		pA
V_n	Input Voltage Noise	$f = 0.1\text{ Hz}$ to 10 Hz		3.14		μV_{PP}
e_n	Input Voltage Noise Density	$f = 1\text{ kHz}$		8.2		$\text{nV}/\sqrt{\text{Hz}}$
i_n	Input Current Noise	$f = 1\text{ kHz}$		2		$\text{fA}/\sqrt{\text{Hz}}$
C_{IN}	Input Capacitance	Differential		8		pF
		Common Mode		7		pF
CMRR	Common Mode Rejection Ratio	$V_{CM} = 2.5\text{ V}$	90	106		dB
		$V_{CM} = 0\text{ V}$ to 3 V	80	106		dB
		$V_{CM} = 0\text{ V}$ to 5 V	55	72		dB
V_{CM}	Common-mode Input Voltage Range		$V^- - 0.1$		$V^+ + 0.1$	V
PSRR	Power Supply Rejection Ratio	$V_S = 2.2\text{ V}$ to 5.5 V , $V_{CM} = 0\text{ V}$	82	100		dB
A_{VOL}	Open-Loop Large Signal Gain	$R_{LOAD} = 2\text{ k}\Omega$, $V_{OUT} = -2\text{ V}$ to 2 V	100	120		dB
V_{OL} , V_{OH}	Output Swing from Supply Rail	$R_{LOAD} = 2\text{ k}\Omega$		20	50	mV
R_{OUT}	Closed-Loop Output Impedance	$G = 1$, $f = 1\text{ MHz}$, $I_{OUT} = 0$		0.2		Ω
R_O	Open-Loop Output Impedance	$f = 1\text{ kHz}$, $I_{OUT} = 0$		125		Ω
I_{SC}	Output Short-Circuit Current	Sink or source current	100	130		mA
V_S	Supply Voltage		2.2		5.5	V
I_Q	Quiescent Current per Amplifier	$V_S = 5\text{ V}$		1.4	1.95	mA
PM	Phase Margin	$R_{LOAD} = 1\text{ k}\Omega$, $C_{LOAD} = 60\text{ pF}$		60		$^\circ$
GM	Gain Margin	$R_{LOAD} = 1\text{ k}\Omega$, $C_{LOAD} = 60\text{ pF}$		8		dB
GBWP	Gain-Bandwidth Product	$f = 1\text{ kHz}$		10		MHz
SR	Slew Rate	$A_V = 1$, $C_{LOAD} = 100\text{ pF}$, $R_{LOAD} = 2\text{ k}\Omega$	3.0	7		$\text{V}/\mu\text{s}$

FPBW	Full Power Bandwidth Note 1		414	kHz
t_s	Settling Time, 0.1% Settling Time, 0.01%	$A_v = -1, 1 \text{ V Step}$	0.75 0.85	μs
THD+N	Total Harmonic Distortion and Noise	$f = 1 \text{ kHz}, A_v = 1, R_{LOAD} = 2 \text{ k}\Omega,$ $V_{OUT} = 1\text{Vp-p}$	0.0005	%
X_{talk}	Channel Separation	$f = 1 \text{ kHz}, R_L = 2 \text{ k}\Omega$	110	dB

(1) Full power bandwidth is calculated from the slew rate $FPBW = SR/\pi \cdot VP-P$.

Typical Performance Characteristics

$V_S = \pm 2.75\text{ V}$, $V_{CM} = 0\text{ V}$, $R_L = \text{Open}$, unless otherwise specified.

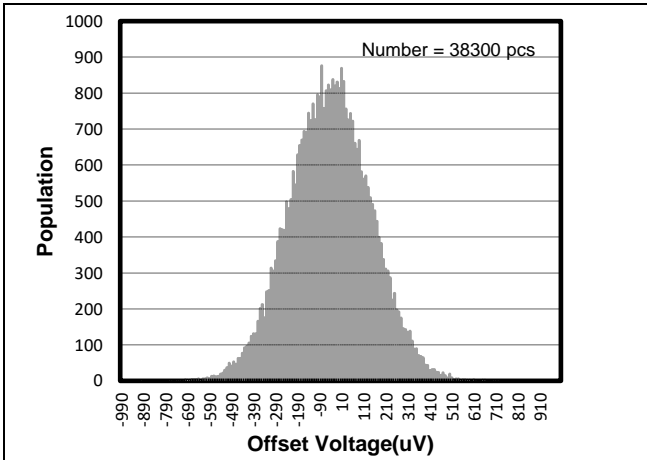


Figure 1. Offset Voltage Production Distribution

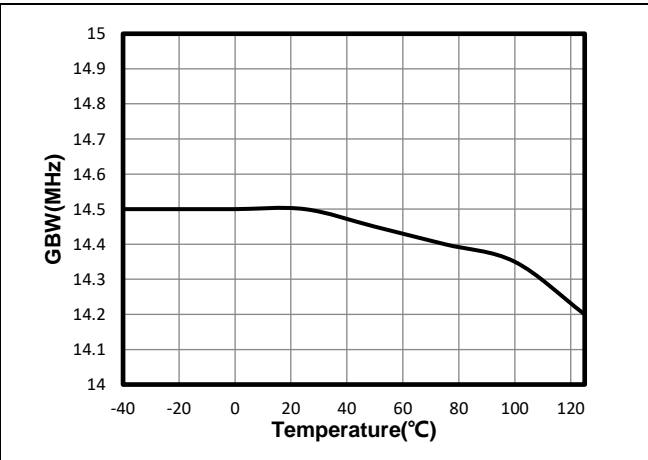


Figure 2. Unity Gain Bandwidth vs. Temperature

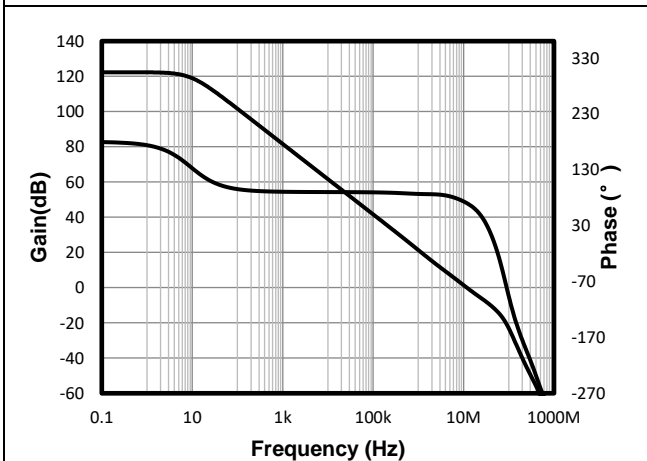


Figure 3. Open-Loop Gain and Phase

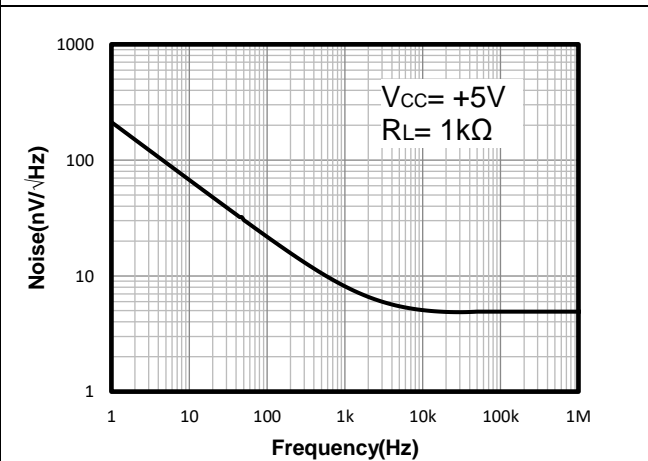


Figure 4. Input Voltage Noise Spectral Density

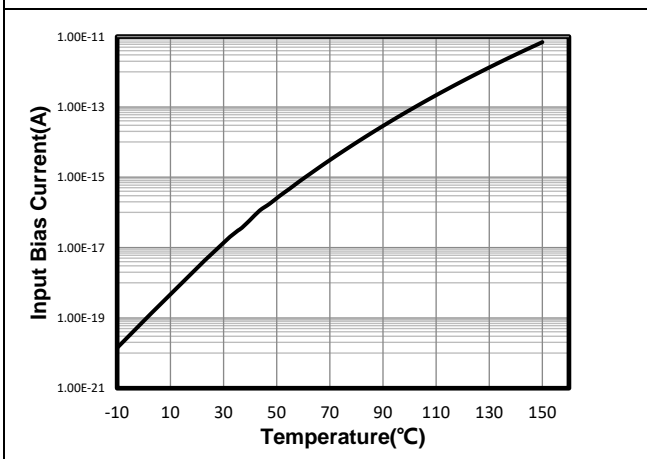


Figure 5. Input Bias Current vs. Temperature

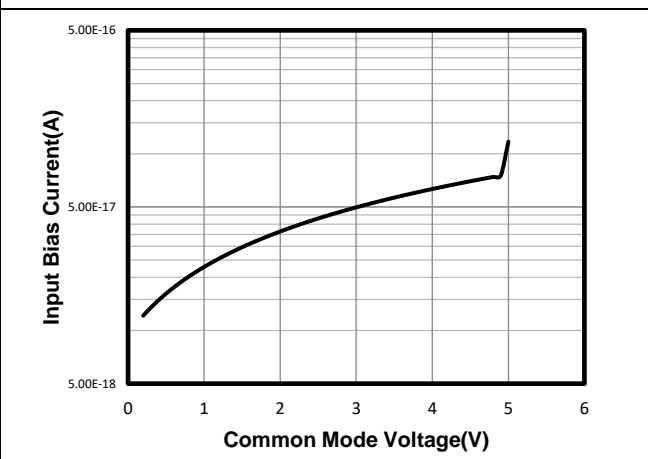


Figure 6. Input Bias Current vs. Common-Mode Voltage

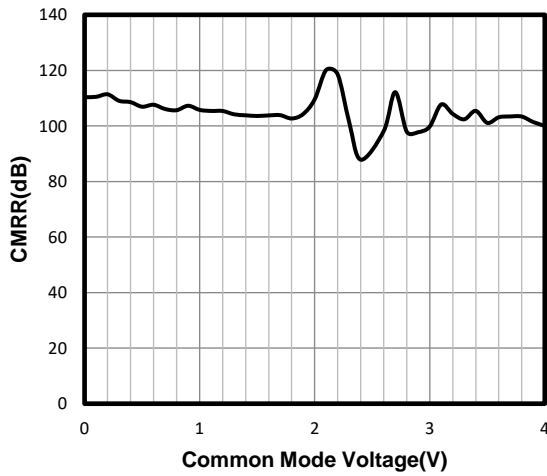


Figure 7. Common-Mode Rejection Ratio

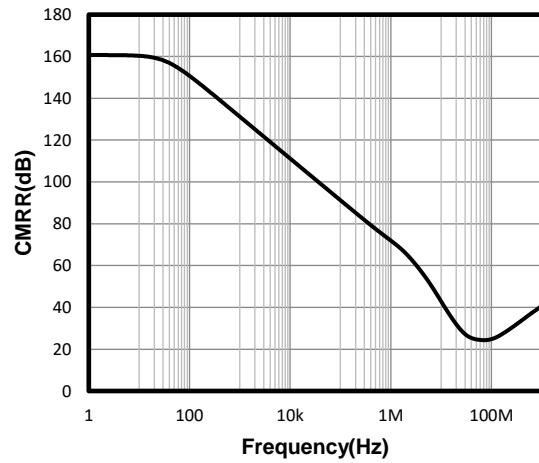


Figure 8. CMRR vs. Frequency

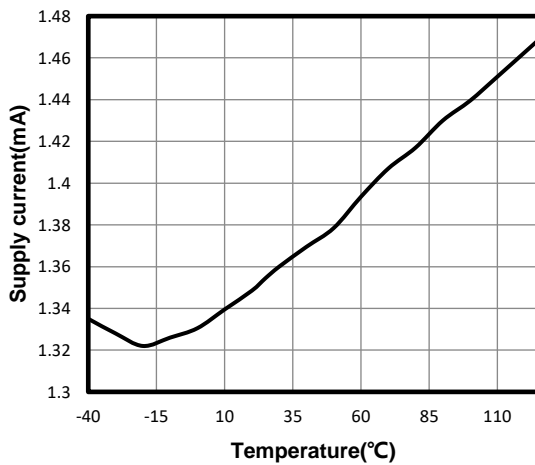


Figure 9. Power-Supply Rejection Ratio

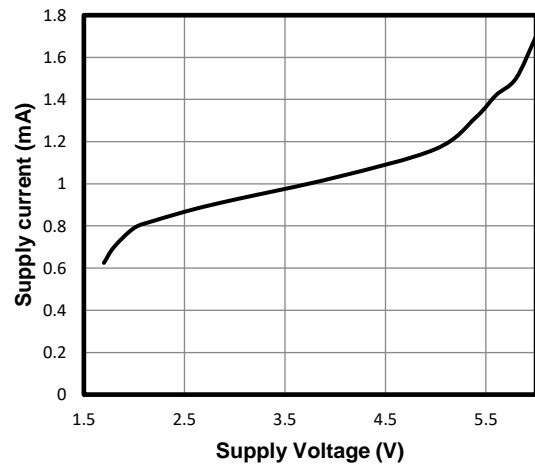


Figure 10. Quiescent Current vs. Supply Voltage

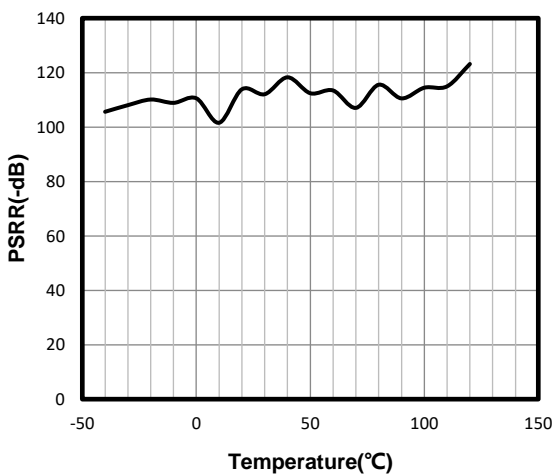


Figure 11. Power-Supply Rejection Ratio vs. Temperature

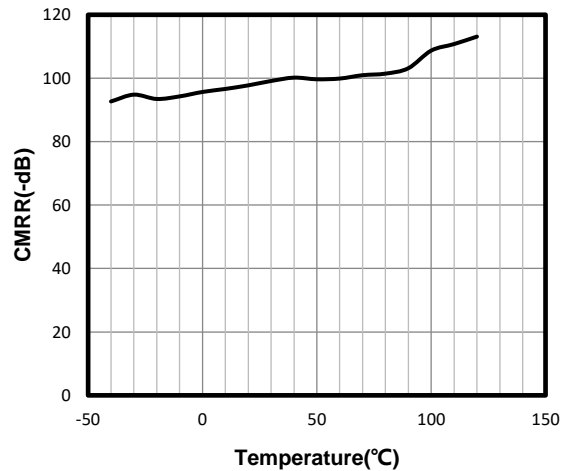


Figure 12. CMRR vs. Temperature

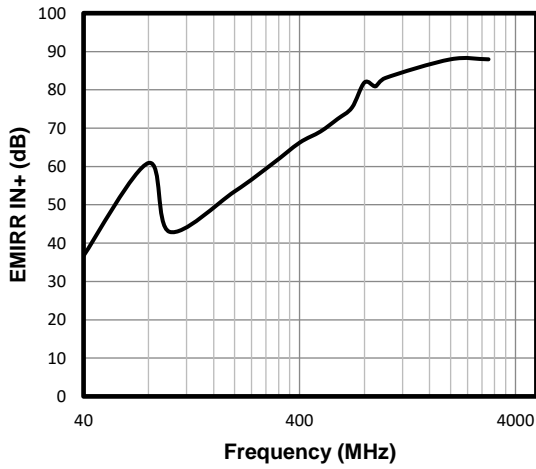


Figure 13. EMIRR IN+ vs. Frequency

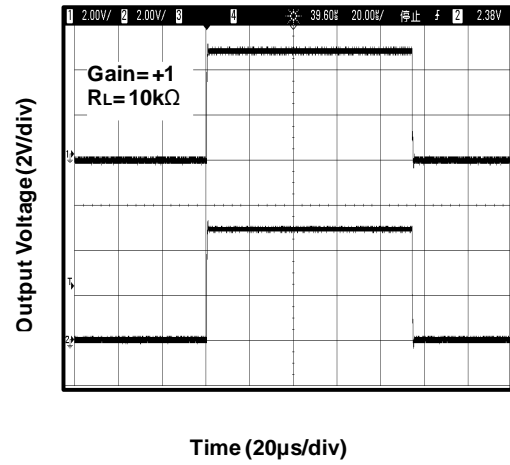


Figure 14. Large-Scale Step Response

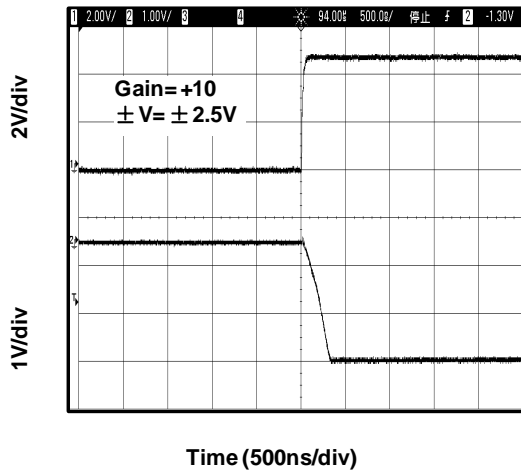


Figure 15. Negative Over-Voltage Recovery

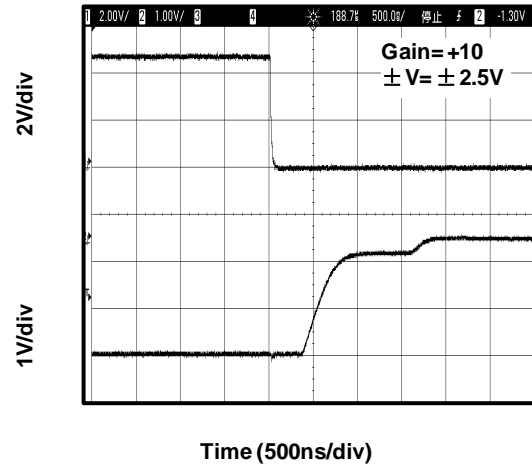


Figure 16. Positive Over-Voltage Recovery

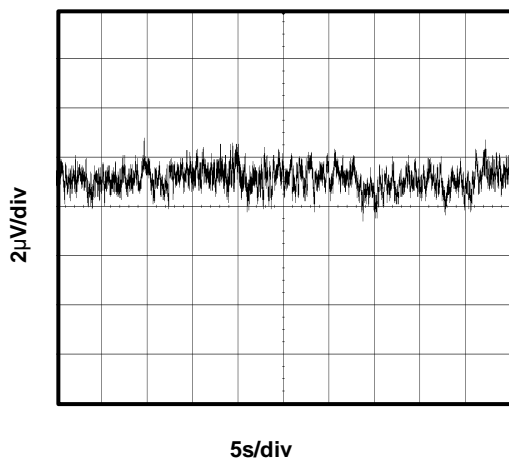


Figure 17. 0.1 Hz TO 10 Hz Input Voltage Noise

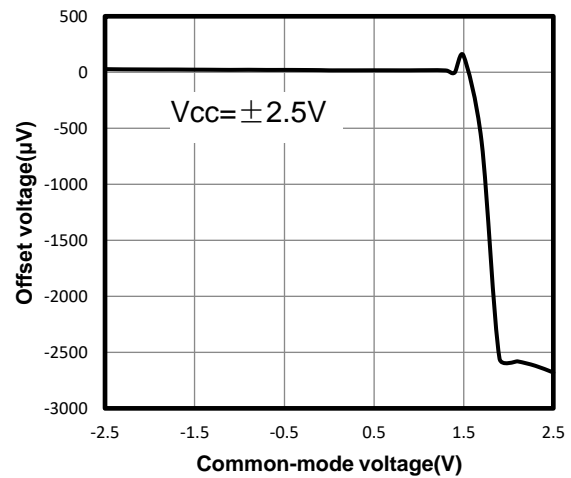


Figure 18. Offset Voltage vs Common-Mode Voltage

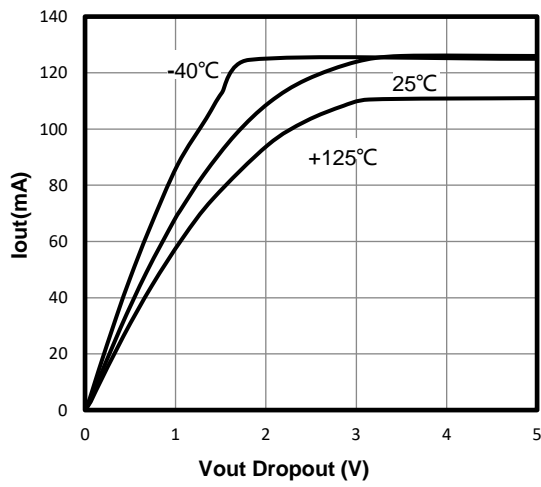


Figure 19. Positive Output Swing vs. Load Current

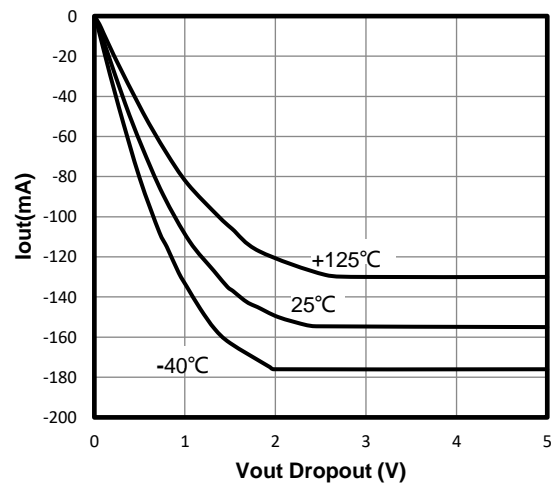


Figure 20. Negative Output Swing vs. Load Current

Detailed Description

Overview

The TP2411 series op amps can operate on a single-supply voltage (2.2 V to 5.5 V), or a split-supply voltage (± 1.1 V to ± 2.75 V), making them highly versatile and easy to use. The power-supply pins should have local bypass ceramic capacitors (typically 0.001 μ F to 0.1 μ F). These amplifiers are fully specified from +2.2 V to +5.5 V and over the extended temperature range of -40°C to $+125^{\circ}\text{C}$. Parameters that can exhibit variance with regard to operating voltage or temperature are presented in the Typical Characteristics.

Functional Block Diagram

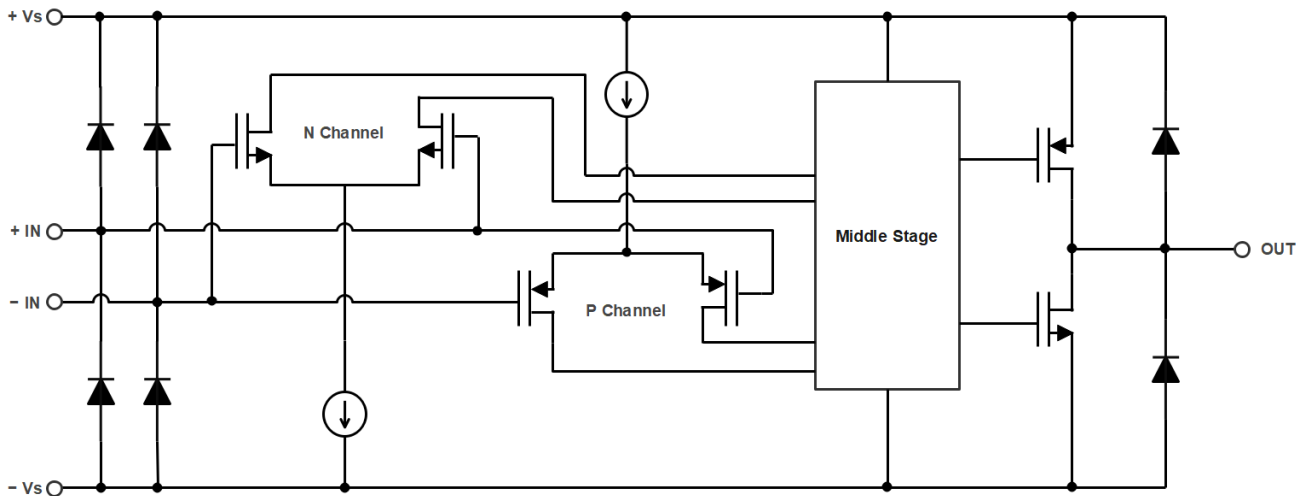


Figure 21. Functional Block Diagram


Application and Implementation

NOTE

Information in the following applications sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

Low Side Current Sensing Application

Figure 22 shows the TP241X configured in a low-side current sensing application. The low-side current sensing method consists of placing a sense resistor between the load and the circuit ground. The voltage dropping across the resistor is amplified by different amplifier circuits with TP241X. The V_{REF} can be used to add bias voltage to output voltage. Particular attention must be paid to the matching and precision of R1, R2, R3, and R4, to maximize the accuracy of the measurement.

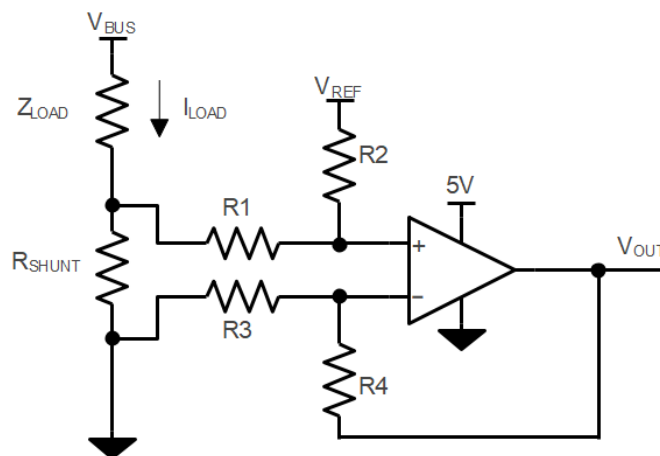

$$V_{OUT} = (I_{LOAD} \times R_{SHUNT}) \times (R2 / R1) + V_{REF}$$



$$\text{When } R3 = R1, R2 = R4, R_{SHUNT} \ll R1$$

Figure 22 Dual Supply Operation Connections


Power Supply Recommendations

Place 0.1- μ F bypass capacitors close to the power supply pins for reducing coupling errors from the noisy or high impedance power supplies.


Tape and Reel Information

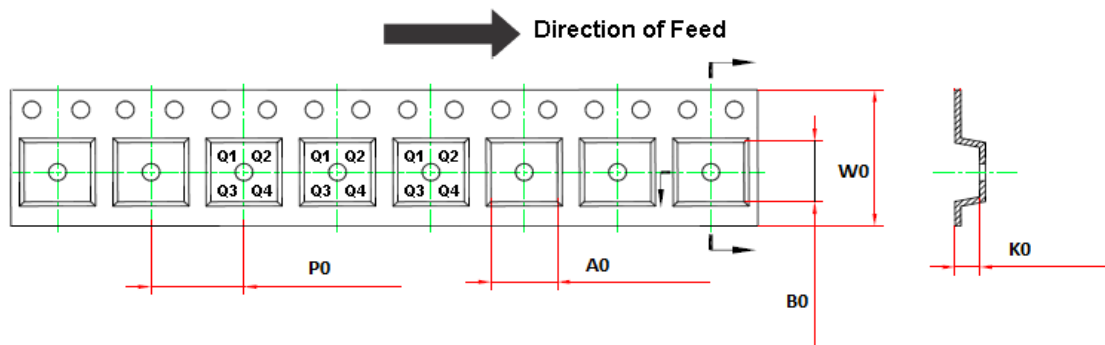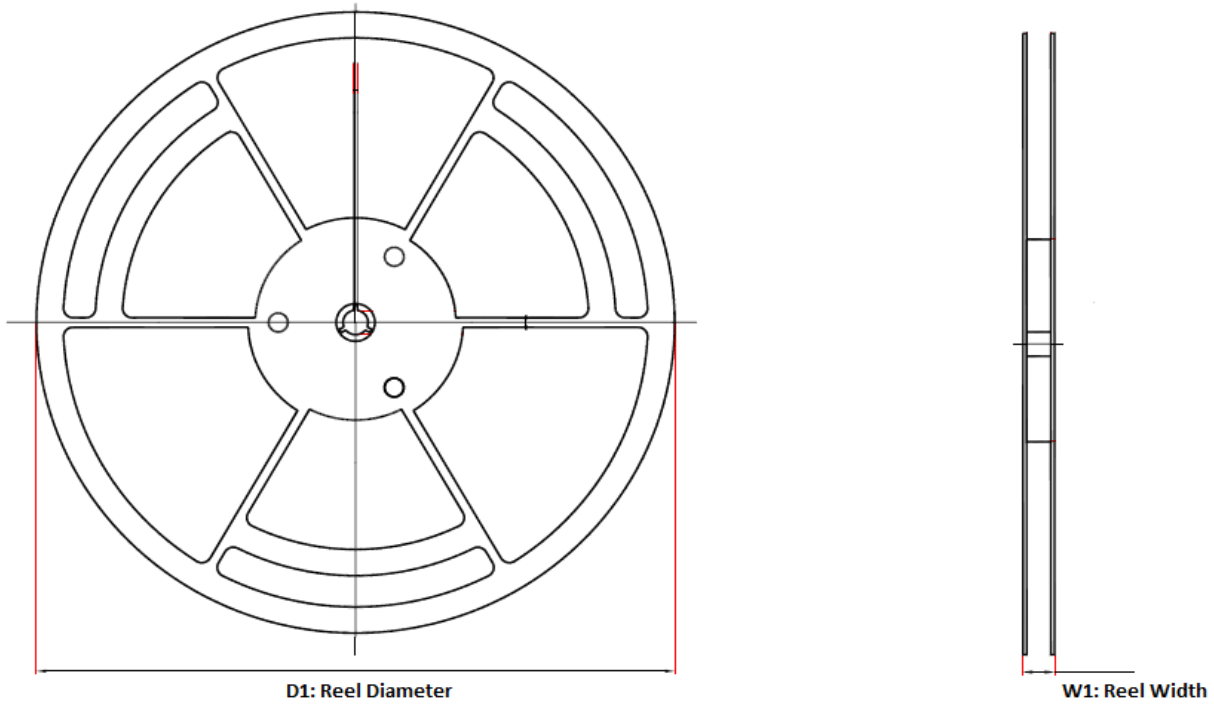

Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TP2411-TR	SOT23-5	180.0	13.1	3.2	3.2	1.4	4.0	8.0	Q3
TP2412-SR	SOP8	330.0	17.6	6.4	5.4	2.1	8.0	12.0	Q1
TP2412-VR	MSOP8	330.0	17.6	5.2	3.3	1.5	8.0	12.0	Q1
TP2412-TR	SOT23-8	178.0	12.3	3.2	3.2	1.4	4.0	8.0	Q3
TP2412-TSR	TSSOP8	330.0	17.6	6.8	3.3	1.2	8.0	12.0	Q1
TP2414-SR	SOP14	330.0	21.6	6.5	9.0	2.1	8.0	16.0	Q1
TP2414-TR	TSSOP14	330.0	17.6	6.8	5.4	1.2	8.0	12.0	Q1

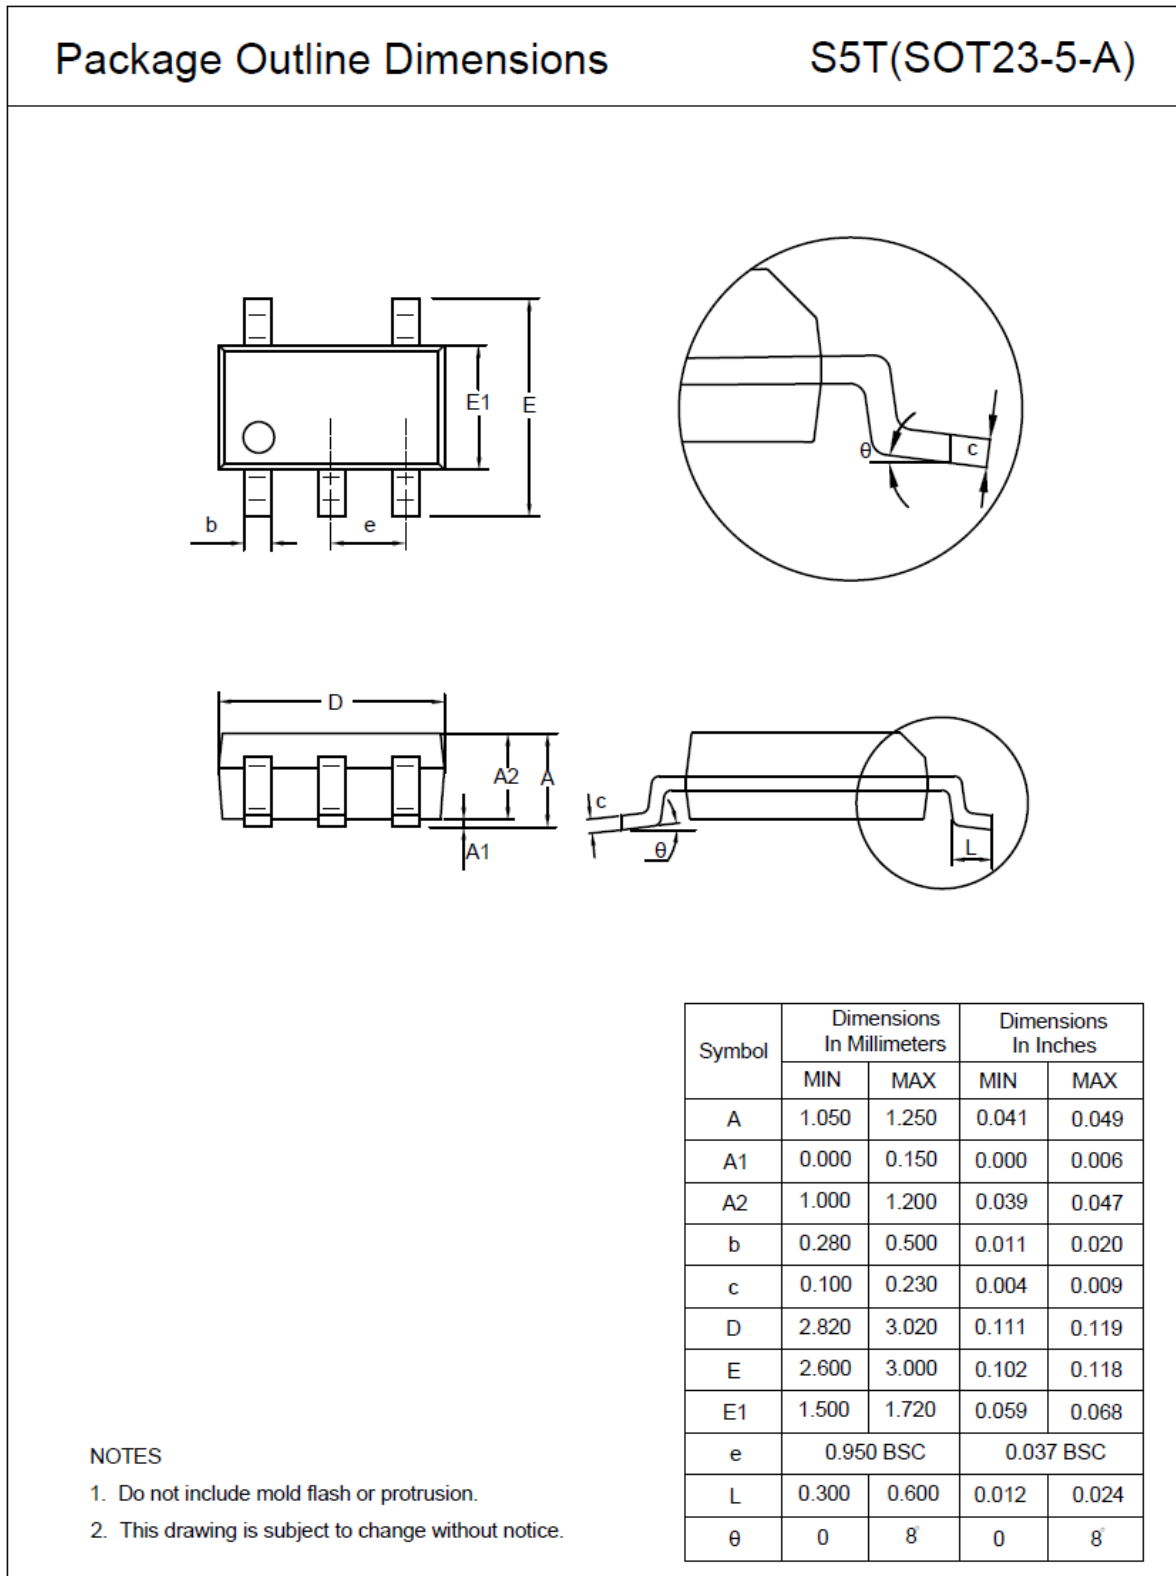Package Outline Dimensions
SOT23-5


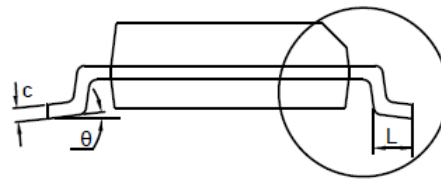
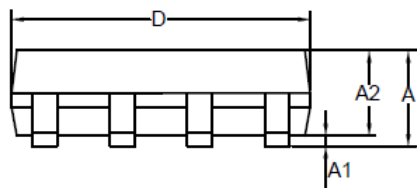
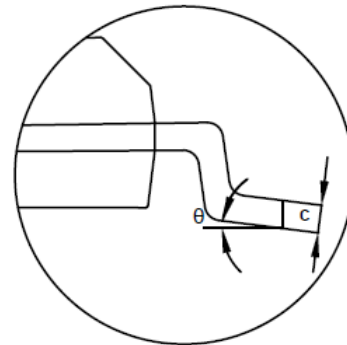
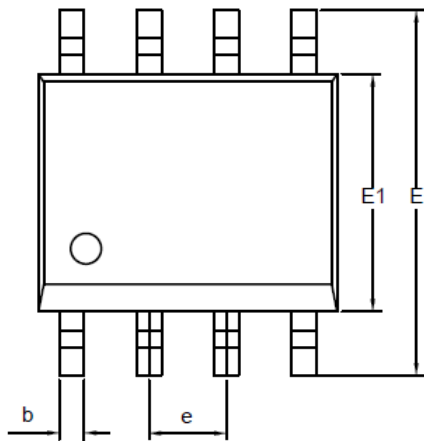
SOT23-8

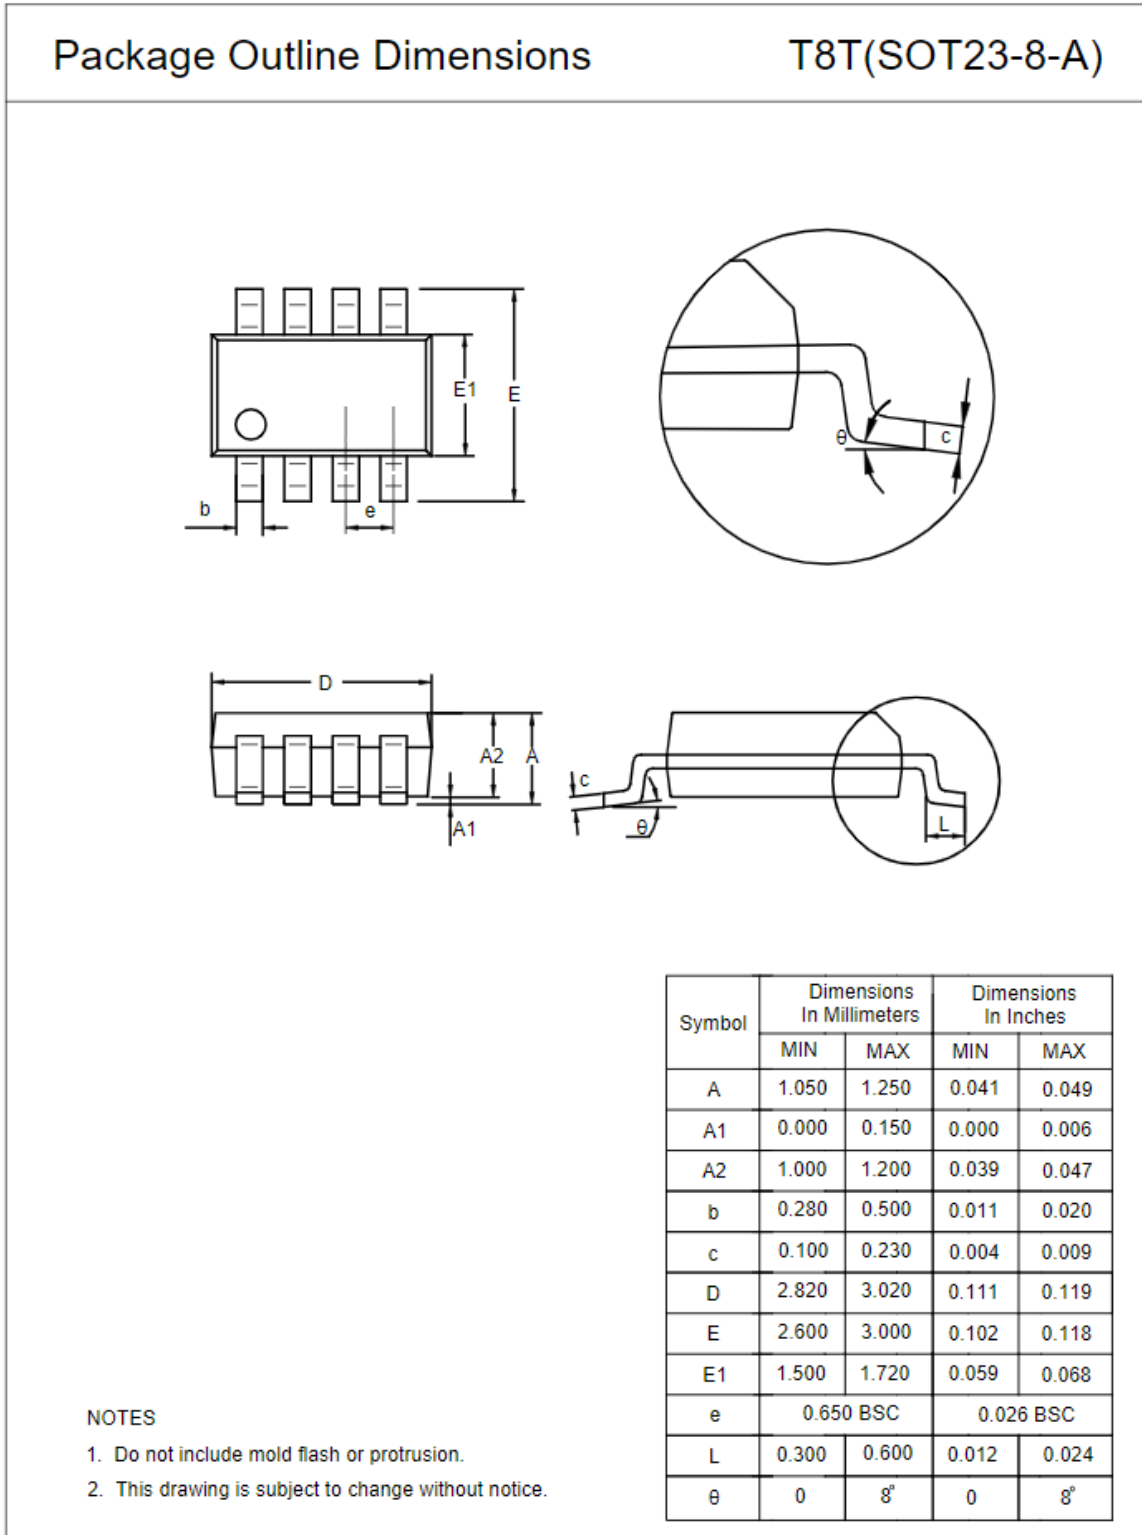

SOP8

Package Outline Dimensions

SO1(SOP-8-A)




Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.250	1.550	0.049	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.700	5.100	0.185	0.201
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270 BSC		0.050 BSC	
L	0.400	1.000	0.016	0.039
θ	0	8	0	8


NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.


MSOP8

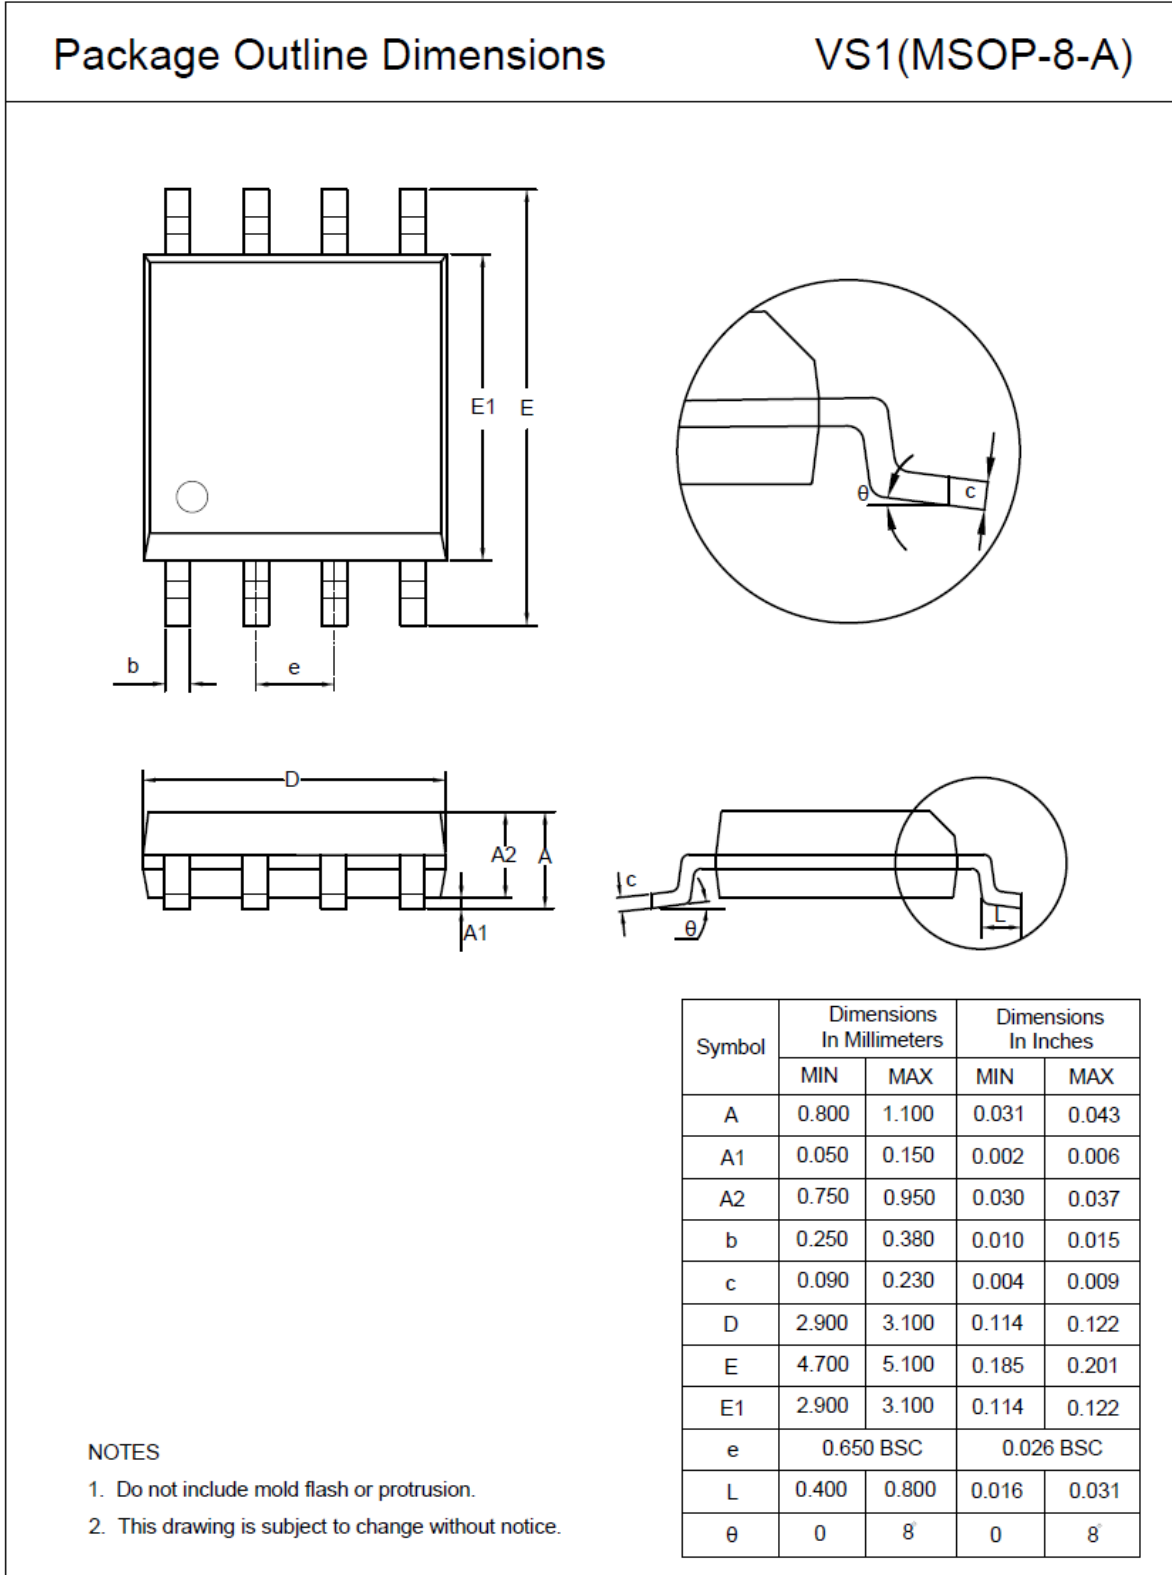


TSSOP8

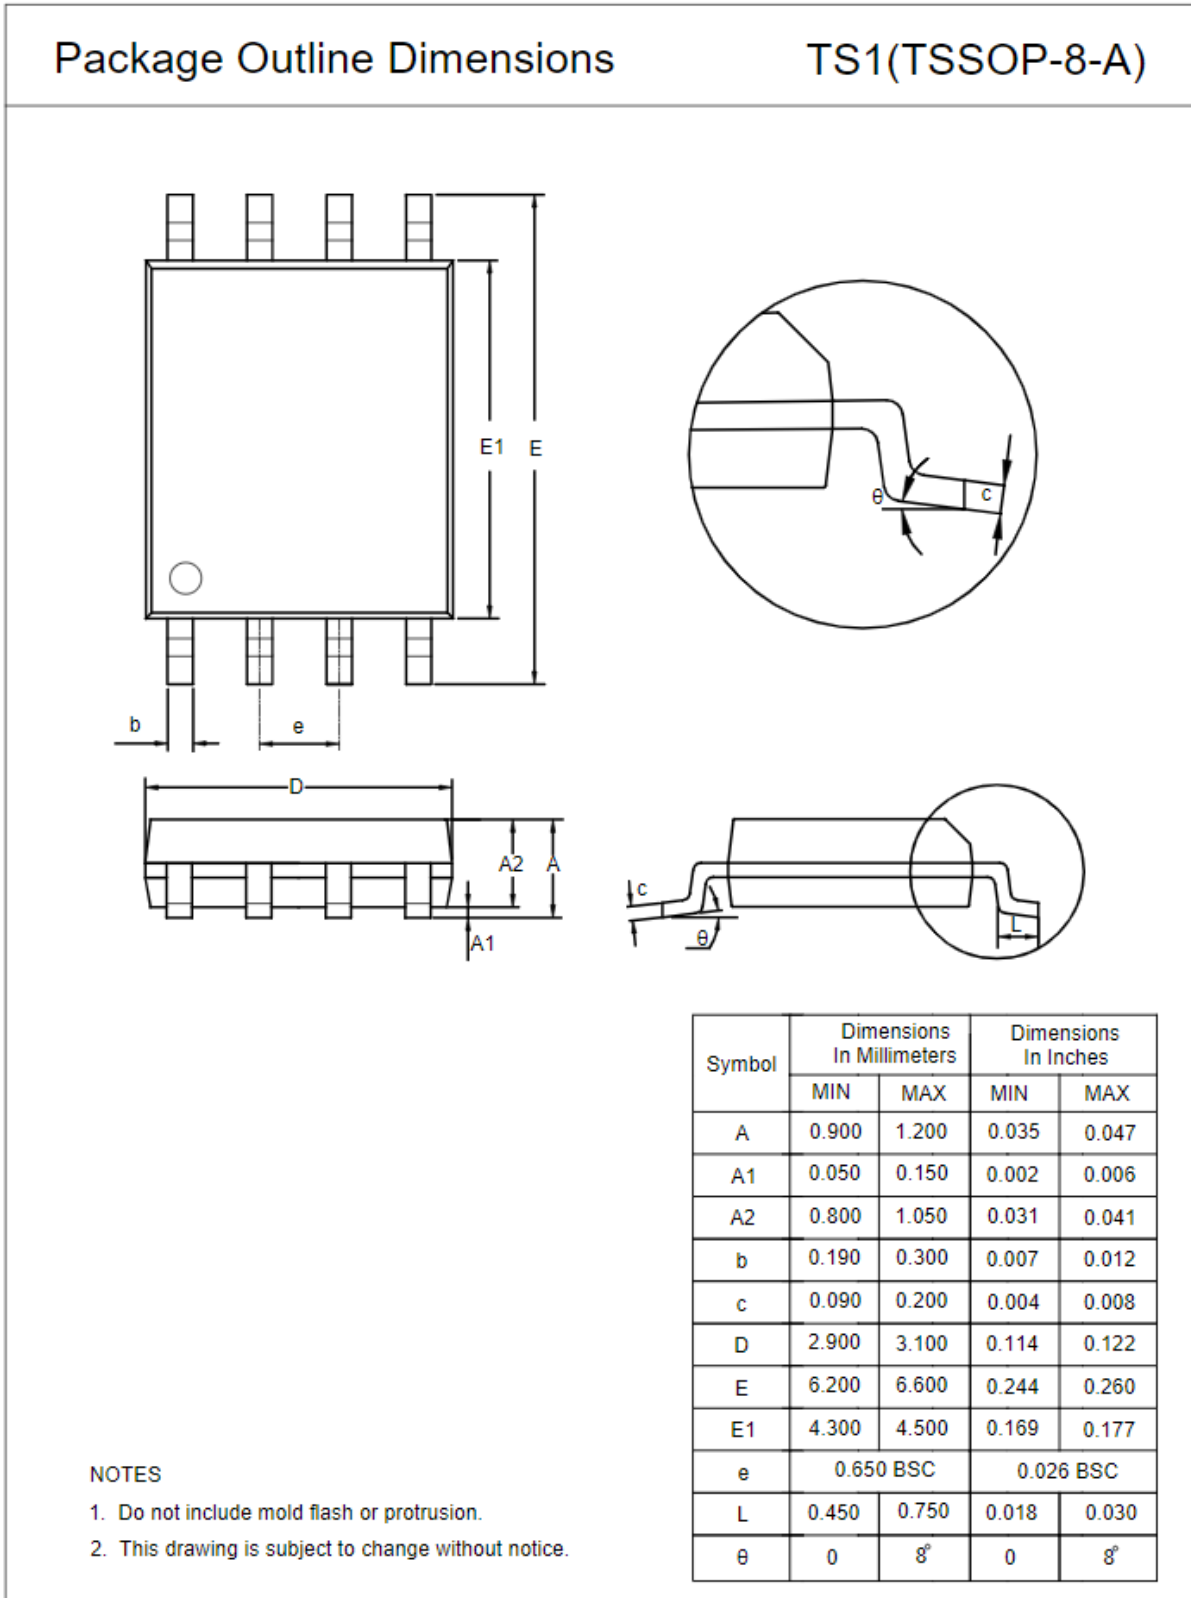

TSSOP14

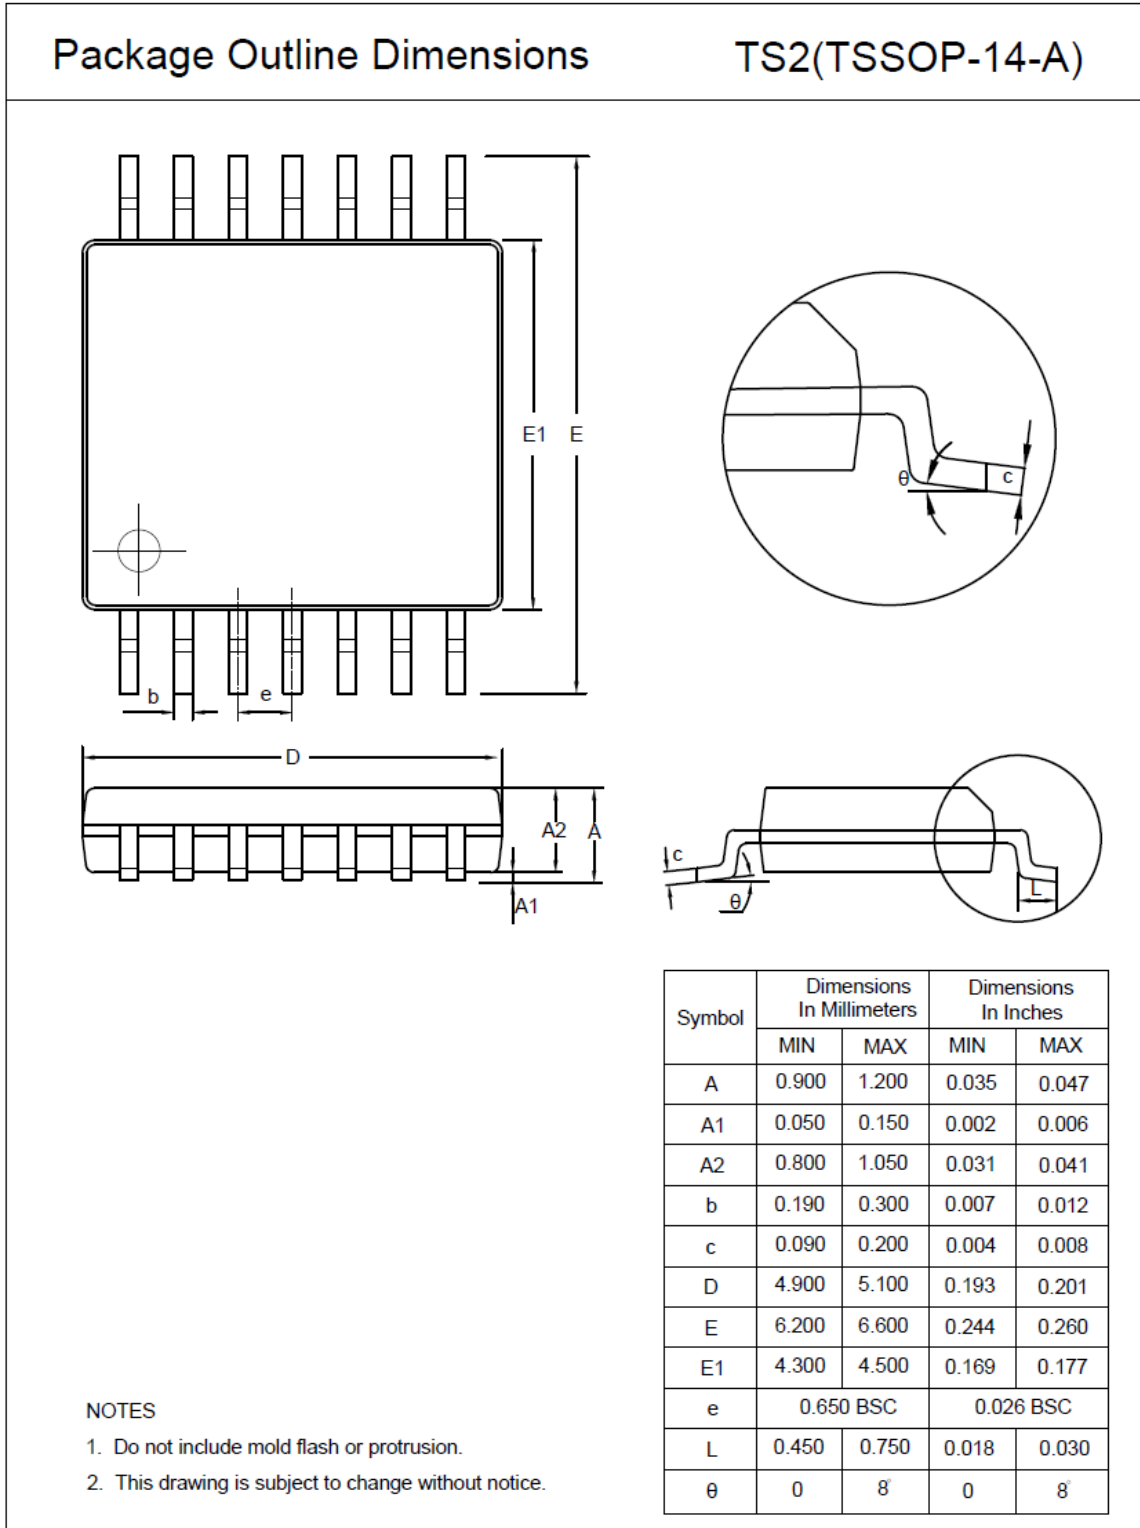

SOP14

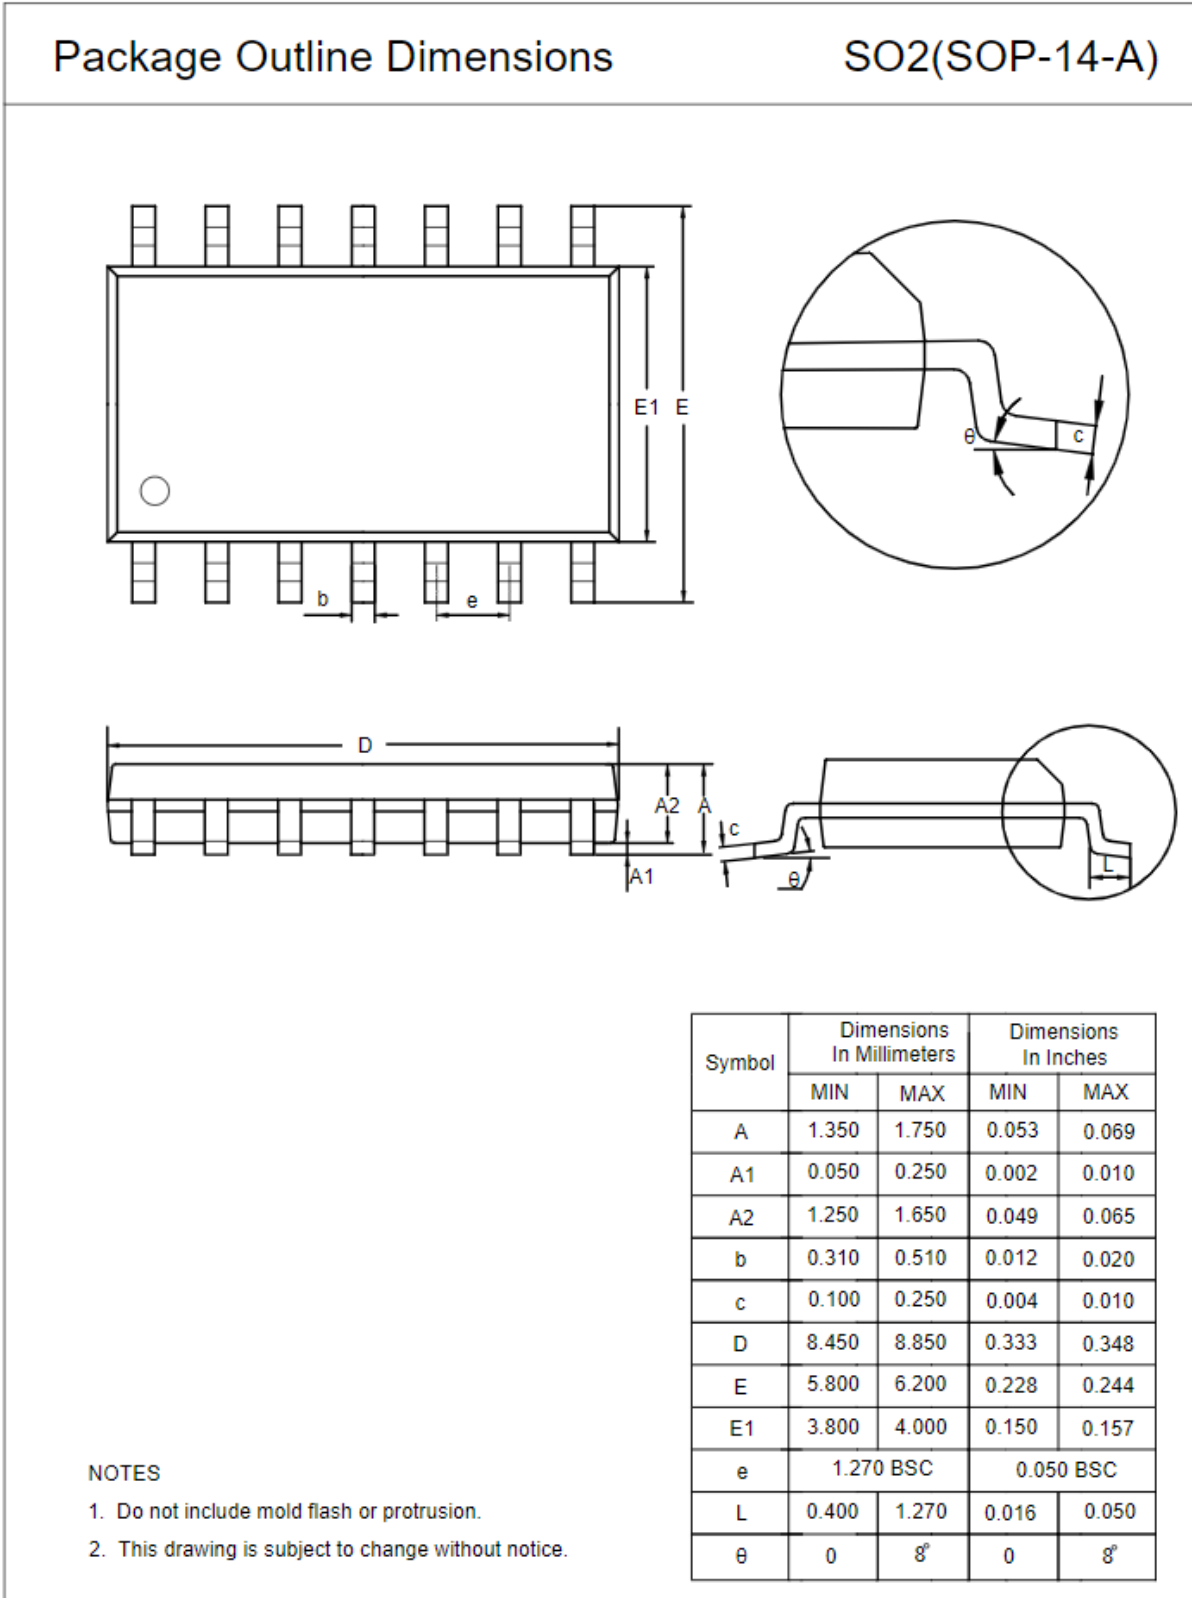

Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TP2411-TR	-40 to 125°C	SOT23-5	411	3	Tape and Reel, 3,000	Green
TP2412-SR	-40 to 125°C	SOP8	TP2412	3	Tape and Reel, 4,000	Green
TP2412-VR	-40 to 125°C	MSOP8	TP2412	3	Tape and Reel, 3,000	Green
TP2412-TSR	-40 to 125°C	TSSOP8	TP2412	3	Tape and Reel, 3,000	Green
TP2412-TR	-40 to 125°C	SOT23-8	S12	3	Tape and Reel, 3,000	Green
TP2414-SR	-40 to 125°C	SOP14	TP2414	3	Tape and Reel, 2,500	Green
TP2414-TR	-40 to 125°C	TSSOP14	TP2414	3	Tape and Reel, 3,000	Green

Green: 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

IMPORTANT NOTICE AND DISCLAIMER

Copyright© 3PEAK 2012-2023. All rights reserved.

Trademarks. Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

Performance Information. Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

Disclaimer. 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.