

Features

- Supply Voltage: 4.5 V to 36 V
- Offset Voltage: $\pm 50 \mu$ V (Max)
- Differential Input Voltage Range to Supply Rail, can Work as Comparator
- Input Rail to $-V_s$, Rail-to-Rail Output
- Drive any Capacitive Load
- Bandwidth: 6 MHz, Slew Rate: 5 V/ μ s
- Excellent EMI Suppress Performance: 85 dB at 1 GHz
- Over-Temperature Protection
- Low Noise: 8 nV/ $\sqrt{\text{Hz}}$ at 1 kHz
- 2-kV HBM, 1-kV CDM, 500-mA Latch Up
- Operating Temperature Range: -40°C to 125°C

Applications

- Instrumentation
- Active Filters, ASIC Input or Output Amplifier
- Sensor Interface
- Industrial Control

Description

The TP27 is a series of the newest high supply voltage amplifiers with low offset, low power, and stable high-frequency response. The series incorporates 3PEAK's proprietary and patented design techniques to achieve excellent AC performance with 6-MHz bandwidth, 5-V/ μ s slew rate, and low distortion. The input common-mode voltage range extends to $-V_s$, and the outputs swing rail-to-rail. The TP27 can be used as plug-in replacements for commercially available op amps to reduce power consumption, extend the input/output range, and improve performance.

The combination of features makes the TP27 an ideal choice for industrial control and instrumentation.

	TP07A	TP17	TP27	Unit
V_{os} , 25°C	± 150	± 100	± 50	μV
V_{os} , -40 to 85°C	± 500	± 400	± 70	μV
GBW	1	6	6	MHz
I_Q	1.5	2	1.6	mA

Table of Contents

Features.....	1
Applications.....	1
Description.....	1
Revision History.....	3
Pin Configuration and Functions.....	4
Specifications.....	5
Absolute Maximum Ratings ⁽¹⁾	5
ESD, Electrostatic Discharge Protection.....	5
Thermal Information.....	5
Electrical Characteristics.....	6
Typical Performance Characteristics.....	8
Tape and Reel Information.....	11
Package Outline Dimensions.....	12
SOP8.....	12
Order Information.....	13
IMPORTANT NOTICE AND DISCLAIMER.....	14

36-V, 6-MHz, 50- μ V V_{os} Operational Amplifiers**Revision History**

Date	Revision	Notes
2018-12-21	Rev.Pre.0	Pre-released version.
2019-09-11	Rev.A.0	Initial version.
2020-08-01	Rev.A.1	Corrected the typo in the header: from 5 MHz to 6 MHz. Added the test figure.
2021-07-07	Rev.A.2	Updated the Absolute Maximum Ratings: <ul style="list-style-type: none">• Input Voltage: $(-V_S) - 0.3$ to $(+V_S) + 0.3 \rightarrow (-V_S) - 0.3$ to 40 V ;• Differential Input Voltage : $(+V_S) - (-V_S) \rightarrow (-V_S) - (+V_S)$ to $(+V_S) - (-V_S)$.
2024-12-17	Rev.A.3	The following updates are all about the new datasheet formats or typos, and the actual product remains unchanged. <ul style="list-style-type: none">• Updated to a new datasheet format.• Updated the Package Outline Dimensions.• Updated the Tape and Reel Information.

Pin Configuration and Functions

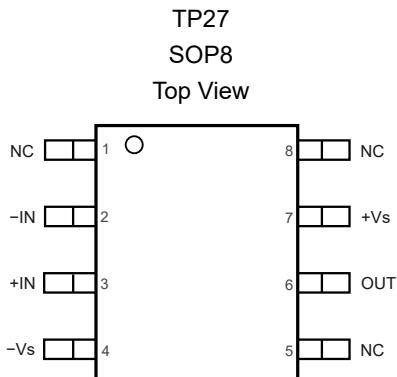


Table 1. Pin Functions: TP27

Pin No.	Name	I/O	Description
1	NC	-	Not connect
2	-IN	I	Inverting input
3	+IN	I	Non-inverting input
4	-Vs	-	Negative power supply
5	NC	-	Not connect
6	OUT	O	Output
7	+Vs	-	Positive power supply
8	NC	-	Not connect

36-V, 6-MHz, 50- μ V V_{os} Operational Amplifiers

Specifications

Absolute Maximum Ratings (1)

Parameter		Min	Max	Unit
	Supply Voltage: (+V _s) – (–V _s)		40	V
	Input Voltage	(–V _s) – 0.3	40	V
	Differential Input Voltage	(–V _s) – (+V _s)	(+V _s) – (–V _s)	V
	Input Current: +IN, –IN ⁽²⁾	–10	10	mA
	Output Voltage	(–V _s) – 0.3	(+V _s) + 0.3	V
	Output Short-Circuit Duration ⁽³⁾		Infinite	
T _J	Maximum Junction Temperature		150	°C
T _A	Operating Temperature Range	–40	125	°C
T _{STG}	Storage Temperature Range	–65	150	°C
T _L	Lead Temperature (Soldering, 10 sec)		260	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

(2) The inputs are protected by ESD-protection diodes to the negative power supply. If the input extends more than 300 mV beyond the negative power supply, the input current should be limited to less than 10 mA.

(3) A heat sink may be required to keep the junction temperature below the absolute maximum. This depends on the power supply voltage and how many amplifiers are shorted. The thermal resistance varies with the amount of PC board metal connected to the package. The specified values are for short traces connected to the leads.

ESD, Electrostatic Discharge Protection

Symbol	Parameter	Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	2	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 ⁽²⁾	1	kV
LU	Latch Up	JESD 78, 25°C	500	mA
		JESD 78, 125°C	250	mA

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Thermal Information

Package Type	θ _{JA}	θ _{Jc}	Unit
SOP8	158	43	°C/W

36-V, 6-MHz, 50- μ V V_{os} Operational Amplifiers
Electrical Characteristics

All test conditions: $V_S = 30$ V, $T_A = 25^\circ\text{C}$, $R_L = 10$ k Ω , unless otherwise noted.

Symbol	Parameter	Conditions	T_A	Min	Typ	Max	Unit
Power Supply							
V_S	Supply Voltage Range			4.5		36	V
I_Q	Quiescent Current per Amplifier	$V_S = 30$ V			1.4	1.6	mA
			-40°C to 125°C			1.8	mA
	Power Supply Rejection Ratio	$V_S = 5$ V			1.2	1.5	mA
			-40°C to 125°C			1.7	mA
$PSRR$	Power Supply Rejection Ratio	$V_S = 4.5$ V to 36 V		125	140		dB
			-40°C to 125°C	120			dB
Input Characteristics							
V_{os}	Input Offset Voltage	$V_S = 30$ V, $V_{CM} = 15$ V		-50		50	μ V
			-40°C to 125°C	-70		70	μ V
		$V_S = 5$ V, $V_{CM} = 2.5$ V		-50		50	μ V
			-40°C to 125°C	-70		70	μ V
$V_{os\ TC}$	Input Offset Voltage Drift		-40°C to 125°C		0.01	0.2	μ V/ $^\circ\text{C}$
I_B	Input Bias Current				100		pA
			-40°C to 125°C		100		pA
I_{os}	Input Offset Current				100		pA
I_{IN}	Different Input Current	$V_S = 36$ V, $V_{ID} = 36$ V			10	100	μ A
			-40°C to 125°C			120	μ A
C_{IN}	Input Capacitance	Differential mode			5		pF
		Common mode			2.5		pF
A_v	Open-Loop Voltage Gain	$R_{LOAD} = 10$ k Ω , $V_{OUT} = 0.5$ V to 29.5 V		130	140		dB
			-40°C to 125°C	125			dB
V_{CMR}	Common-Mode Input Voltage Range			($-V_S$)		($+V_S$) - 1.5	V
$CMRR$	Common-Mode Rejection Ratio	$V_{CM} = 0$ V to 28.5 V		125	140		dB
			-40°C to 125°C	120			dB
Output Characteristics							
	Output Swing from Positive Rail	$R_{LOAD} = 100$ k Ω to $V_S / 2$			10	15	mV
			-40°C to 125°C			30	mV
		$R_{LOAD} = 10$ k Ω to $V_S / 2$			75	100	mV
			-40°C to 125°C			180	mV
		$R_{LOAD} = 2$ k Ω to $V_S / 2$			400	500	mV
			-40°C to 125°C			750	mV

36-V, 6-MHz, 50- μ V V_{os} Operational Amplifiers

Symbol	Parameter	Conditions	T_A	Min	Typ	Max	Unit
I _{SC}	Output Swing from Negative Rail	$R_{LOAD} = 100 \text{ k}\Omega$ to $V_s / 2$			3	5	mV
			-40°C to 125°C			10	mV
		$R_{LOAD} = 10 \text{ k}\Omega$ to $V_s / 2$			25	35	mV
			-40°C to 125°C			60	mV
		$R_{LOAD} = 2 \text{ k}\Omega$ to $V_s / 2$			130	150	mV
			-40°C to 125°C			300	mV
		Source		60	95		mA
			-40°C to 85°C	40			mA
			-40°C to 125°C	35			mA
		Sink		130	150		mA
			-40°C to 85°C	100			mA
			-40°C to 125°C	85			mA
	Capacitive Load Drive				1		nF
AC Specifications							
GBW	Gain-Bandwidth Product				6		MHz
SR	Slew Rate	$G = 1$, 10-V step		3	5		V/ μ s
			-40°C to 125°C	2.2			V/ μ s
t _{OR}	Overload Recovery				500		ns
t _S	Settling Time, 0.1%	$G = 1$, 10-V step			7		μ s
	Settling Time, 0.01%				12		μ s
PM	Phase Margin	$R_L = 10 \text{ k}\Omega$, $C_L = 100 \text{ pF}$			70		°
GM	Gain Margin	$R_L = 10 \text{ k}\Omega$, $C_L = 100 \text{ pF}$			15		dB
Noise Performance							
E _N	Input Voltage Noise	$f = 0.1 \text{ Hz}$ to 10 Hz			0.1		μV_{PP}
e _N	Input Voltage Noise Density	$f = 0.1 \text{ kHz}$			8		$\text{nV}/\sqrt{\text{Hz}}$
		$f = 1 \text{ kHz}$			8		$\text{nV}/\sqrt{\text{Hz}}$
		$f = 10 \text{ kHz}$			10		$\text{nV}/\sqrt{\text{Hz}}$
		$f = 100 \text{ kHz}$			20		$\text{nV}/\sqrt{\text{Hz}}$
i _N	Input Current Noise	$f = 10 \text{ kHz}$			200		$\text{fA}/\sqrt{\text{Hz}}$
THD+N	Total Harmonic Distortion and Noise	$f = 1 \text{ kHz}$, $G = 1$, $R_L = 10 \text{ k}\Omega$, $V_{OUT} = 6 \text{ V}_{RMS}$			0.0005		%

36-V, 6-MHz, 50- μ V V_{os} Operational Amplifiers
Typical Performance Characteristics

All test conditions: $V_S = \pm 15$ V, $V_{CM} = 0$ V, $R_L = 10$ k Ω , unless otherwise noted.

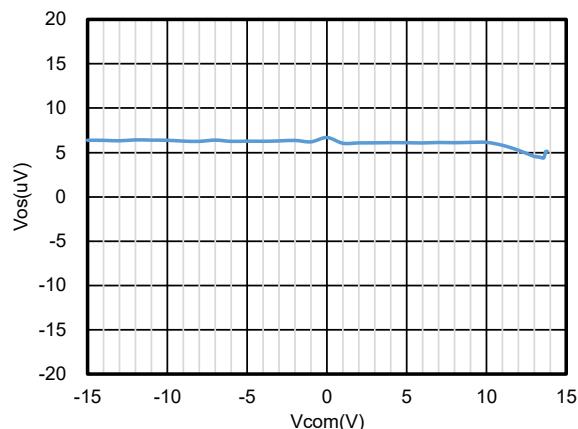


Figure 1. Offset Voltage vs. Common-Mode Voltage

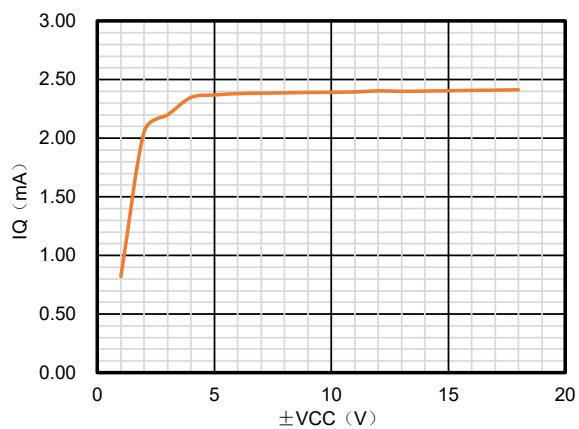


Figure 2. I_Q vs. Supply Voltage

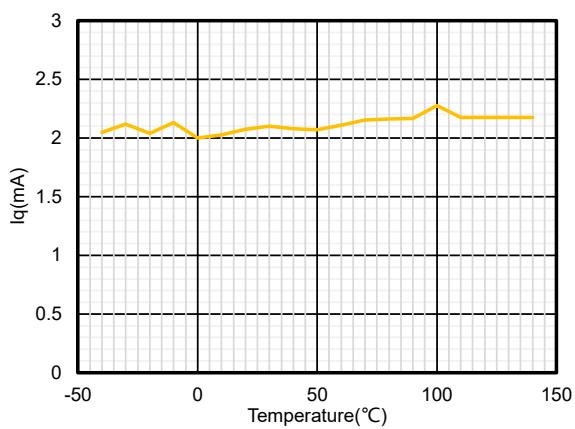


Figure 3. I_Q vs. Temperature, ± 2.5 -V Supply

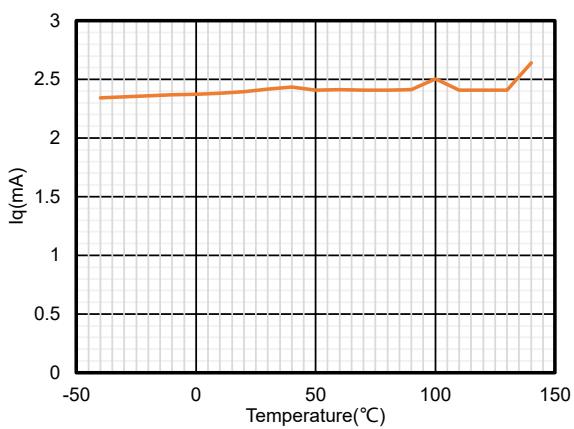


Figure 4. I_Q vs. Temperature, ± 15 -V Supply

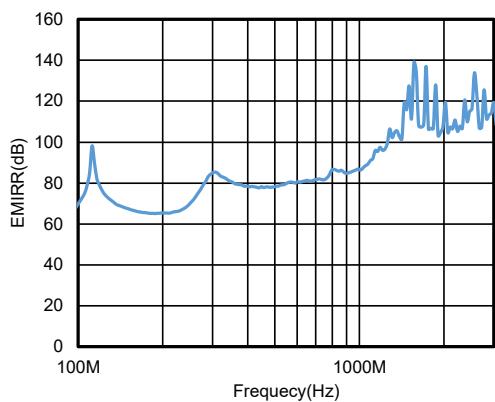


Figure 5. EMIRR vs. Frequency

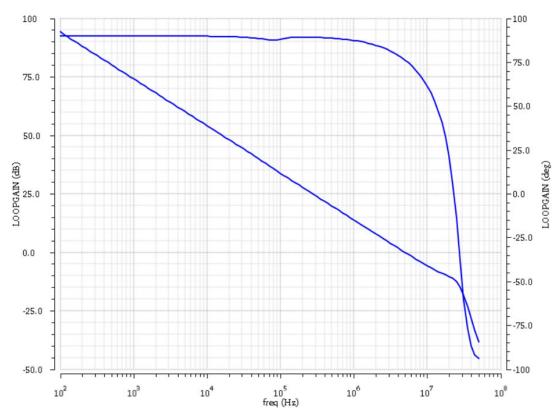


Figure 6. Open-Loop Gain and Phase vs. Frequency

36-V, 6-MHz, 50- μ V V_{os} Operational Amplifiers

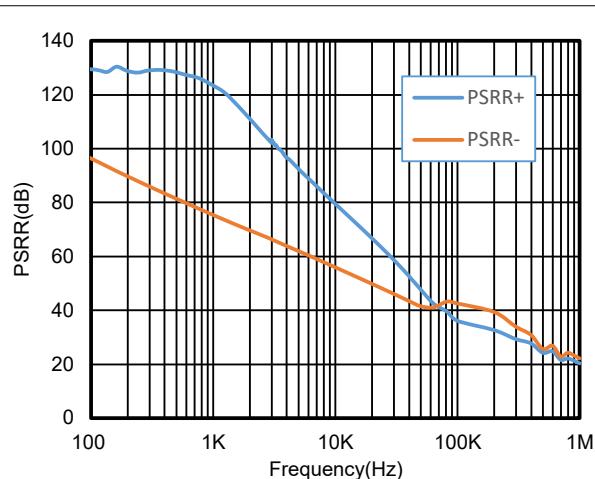


Figure 7. PSRR vs. Frequency


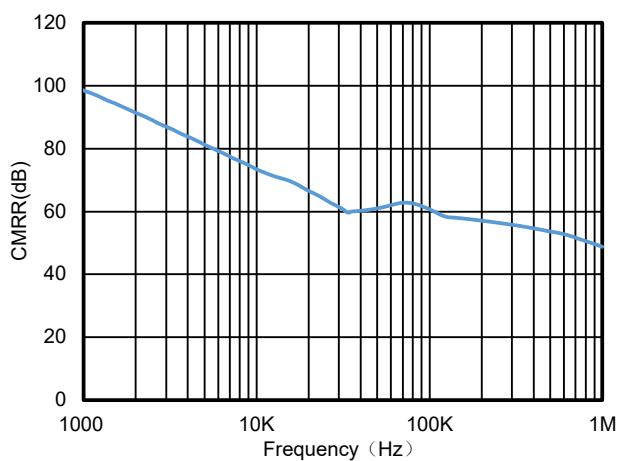


Figure 8. CMRR vs. Frequency

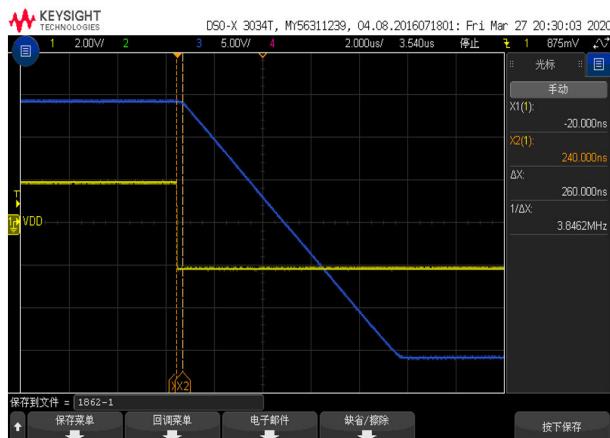

Time: 2 μ s/div, Measure Time: 260 ns

R_L = 2 k Ω , C_L = 100 pF, G = 10


Figure 9. Positive Overload Recovery



Time: 2 μ s/div, Measure Time: 420 ns

R_L = 2 k Ω , C_L = 100 pF, G = 10


Figure 10. Negative Overload Recovery

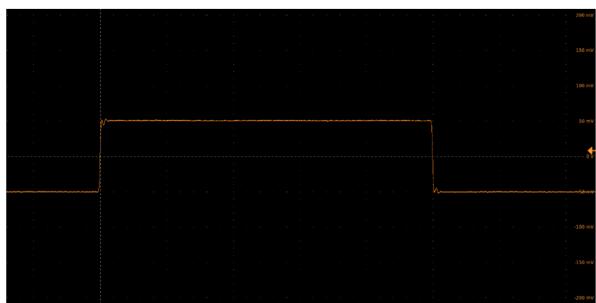

Voltage: 50 mV/div, Time: 2 μ s/div

R_L = 2 k Ω , C_L = 100 pF, G = 1

Figure 11. 100-mV Signal Step Response

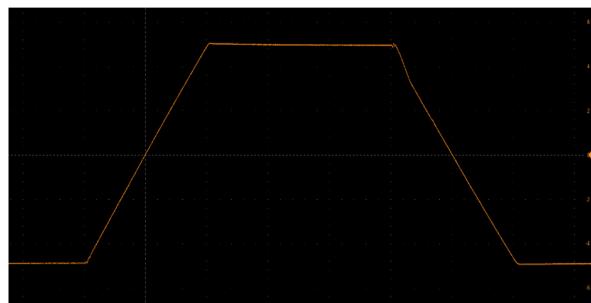

Voltage: 2 V/div, Time: 2 μ s/div

R_L = 2 k Ω , C_L = 100 pF, G = 1

Figure 12. 10-V Signal Step Response

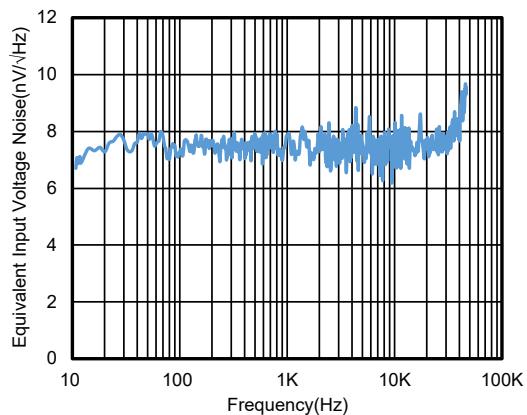
36-V, 6-MHz, 50- μ V V_{os} Operational Amplifiers


Figure 13. Voltage Noise Density vs. Frequency

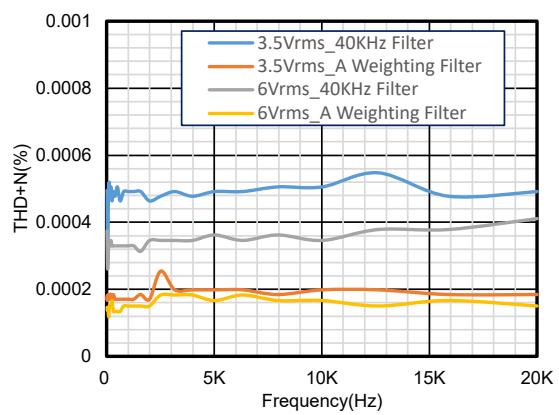


Figure 14. THD vs. Frequency, G = 1

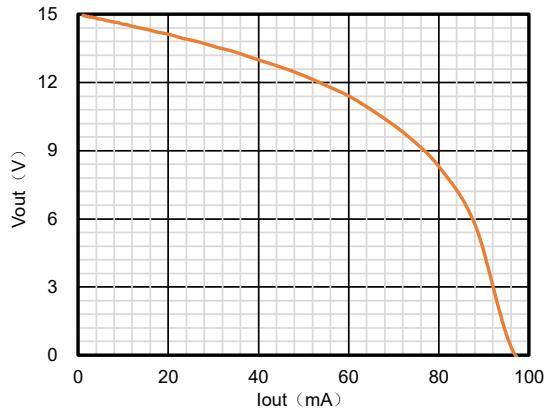


Figure 15. V_{OUT} vs. I_{OUT}, Source



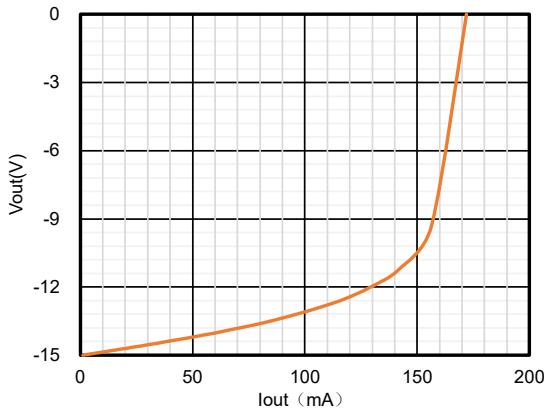


Figure 16. V_{OUT} vs. I_{OUT}, Sink

Tape and Reel Information

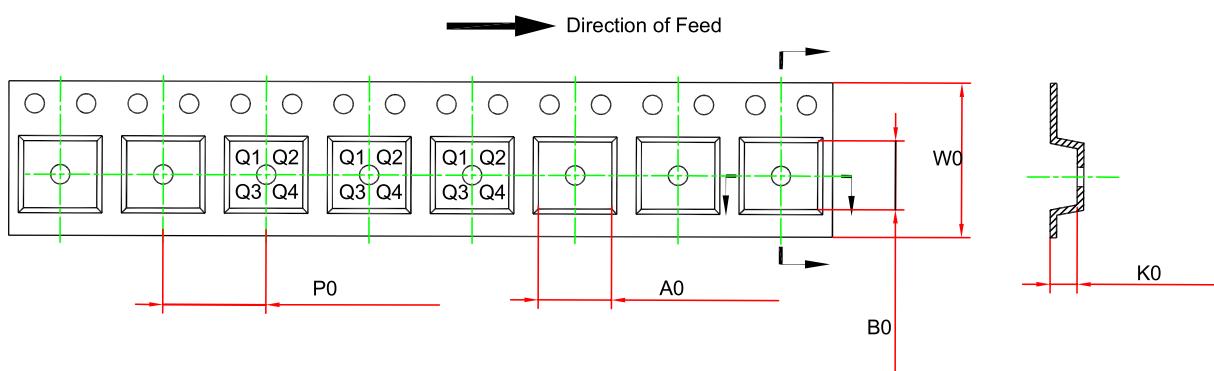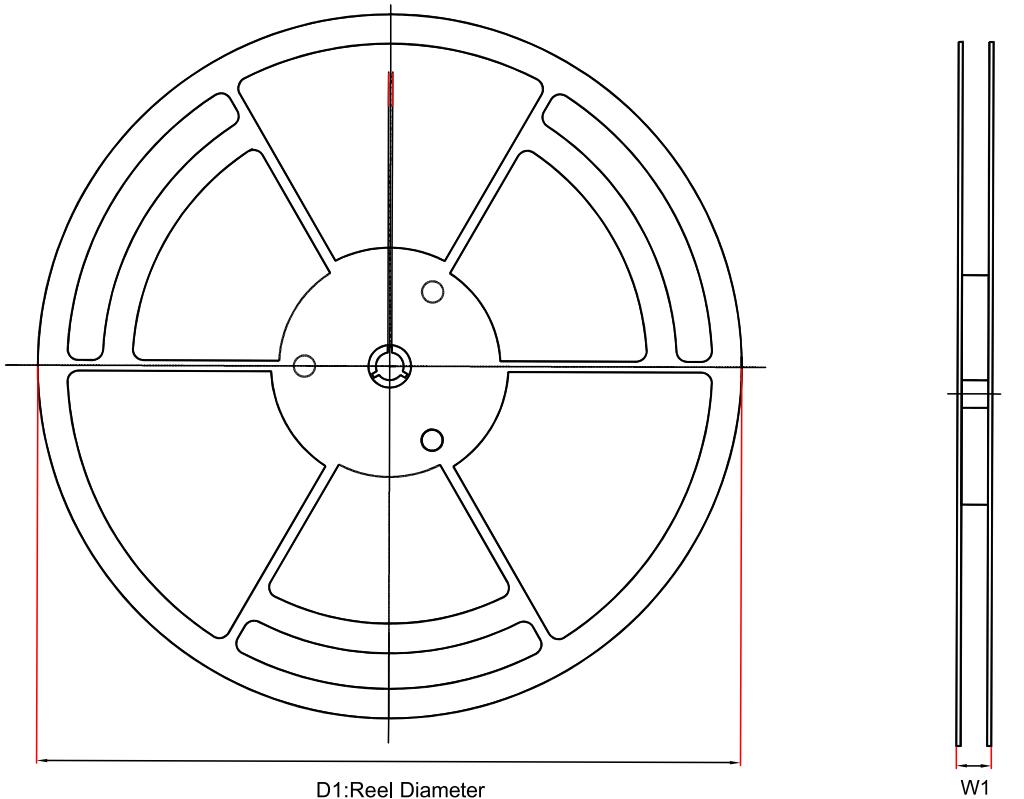

Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm) ⁽¹⁾	B0 (mm) ⁽¹⁾	K0 (mm) ⁽¹⁾	P0 (mm)	W0 (mm)	Pin1 Quadrant
TP27-SR	SOP8	330.0	17.6	6.5	5.4	2.0	8.0	12.0	Q1

(1) The value is for reference only. Contact the 3PEAK factory for more information.

Package Outline Dimensions

SOP8

Package Outline Dimensions				SO1(SOP-8-A)
Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.250	1.550	0.049	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.700	5.100	0.185	0.201
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270 BSC		0.050 BSC	
L	0.400	1.000	0.016	0.039
θ	0	8°	0	8°

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

36-V, 6-MHz, 50- μ V V_{os} Operational Amplifiers**Order Information**

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TP27-SR	-40 to 125°C	SOP8	TP27	3	Tape and Reel, 4000	Green

Green: 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

IMPORTANT NOTICE AND DISCLAIMER

Copyright© 3PEAK 2012-2024. All rights reserved.

Trademarks. Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

Performance Information. Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

Disclaimer. 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.