

## Features

- Supply Voltage: 2.7 V to 5.5 V
- Dual Supply:  $\pm 1.35$  V to  $\pm 2.75$  V
- Low Offset Voltage:  $\pm 20$   $\mu$ V Maximum
- Zero Drift:  $\pm 0.01$   $\mu$ V/ $^{\circ}$ C
- Rail-to-Rail Input and Output
- Gain Bandwidth Product: 15 MHz
- Slew Rate: 4.9 V/ $\mu$ s
- Low Noise: 10 nV/ $\sqrt{\text{Hz}}$  at 1 kHz
- No 1/f noise: 0.2- $\mu$ VPP (0.1 Hz to 10 Hz)

## Applications


- Server PSU
- Battery Current Sensing
- Precision Signal Condition
- Power System
- Temperature Transmitter
- Medical Instrumentation

## Description

The TPA558x is the newest zero-drift amplifier with maximum 20- $\mu$ V low-offset voltage, low noise, and stable high-frequency response. It incorporates proprietary and patented design techniques to achieve excellent AC performance with 15-MHz bandwidth, 4.9-V/ $\mu$ s slew rate, and low distortion while drawing 1-mA quiescent current per amplifier. The input common-mode voltage extends to  $V^-$ , and the output swings rail-to-rail. The amplifier can be used as a plug-in replacement for many commercially available op-amps to improve performance. Considering the requirement of the low standby power in some special applications, there is a shutdown function which is TPA558xN series with only 7.5- $\mu$ A shutdown current.

The TPA5581 and TPA5581U (1-ch version) are offered in the SOT23-5 and SC70-5 packages. The TPA5582 (2-ch version) is available in the SOP-8, TSSOP-8, MSOP-8, and DFN-8 packages. The TPA5581N (shutdown version) is only offered in the SOT23-5 package. All versions can be operated over the industrial temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

## Typical Application Circuit

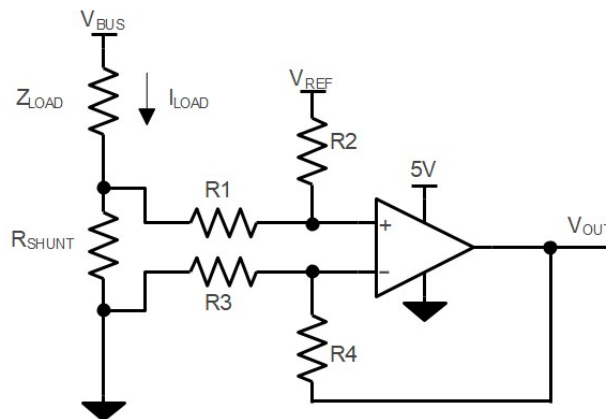

$$V_{\text{OUT}} = (I_{\text{LOAD}} \times R_{\text{SHUNT}}) \times (R_2 / R_1) + V_{\text{REF}}$$





$$\text{When } R_3 = R_1, R_2 = R_4, R_{\text{SHUNT}} \ll R_1$$

## Table of Contents

|   |           |
|---|-----------|
| <b>Features</b> .....                         | <b>1</b>  |
| <b>Applications</b> .....                     | <b>1</b>  |
| <b>Description</b> .....                      | <b>1</b>  |
| <b>Typical Application Circuit</b> .....      | <b>1</b>  |
| <b>Revision History</b> .....                 | <b>3</b>  |
| <b>Pin Configuration and Functions</b> .....  | <b>4</b>  |
| <b>Specifications</b> .....                   | <b>8</b>  |
| Absolute Maximum Ratings <sup>(1)</sup> ..... | 8         |
| ESD, Electrostatic Discharge Protection.....  | 8         |
| Recommended Operating Conditions.....         | 9         |
| Thermal Information.....                      | 9         |
| Electrical Characteristics .....              | 10        |
| Typical Performance Characteristics.....      | 12        |
| <b>Detailed Description</b> .....             | <b>16</b> |
| Overview.....                                 | 16        |
| Functional Block Diagram.....                 | 16        |
| Feature Description.....                      | 16        |
| <b>Application and Implementation</b> .....   | <b>18</b> |
| Application Information .....                 | 18        |
| <b>Tape and Reel Information</b> .....        | <b>19</b> |
| <b>Package Outline Dimensions</b> .....       | <b>21</b> |
| SOT23-5.....                                  | 21        |
| SOT23-6.....                                  | 22        |
| SOT353-5.....                                 | 23        |
| TSSOP8.....                                   | 24        |
| MSOP8.....                                    | 25        |
| MSOP10.....                                   | 26        |
| SOP8.....                                     | 27        |
| DFN2X2-8.....                                 | 28        |
| DFN3X3-8.....                                 | 29        |
| <b>Order Information</b> .....                | <b>30</b> |
| <b>IMPORTANT NOTICE AND DISCLAIMER</b> .....  | <b>31</b> |


## Revision History

| Date       | Revision | Notes   |
|------------|----------|---|
| 2022-12-22 | Rev.A.0  | Initial version .   |
| 2023-07-31 | Rev.A.1  | Updating the curve of the Open Loop Gain and Phase Margin vs Frequency. |

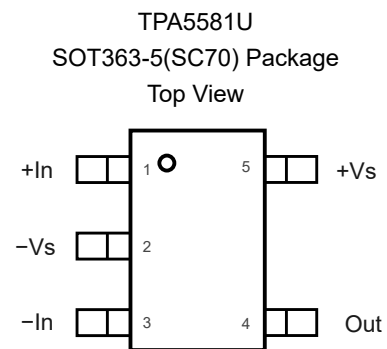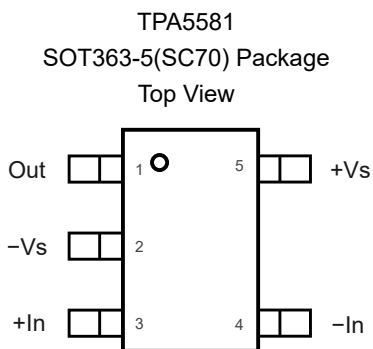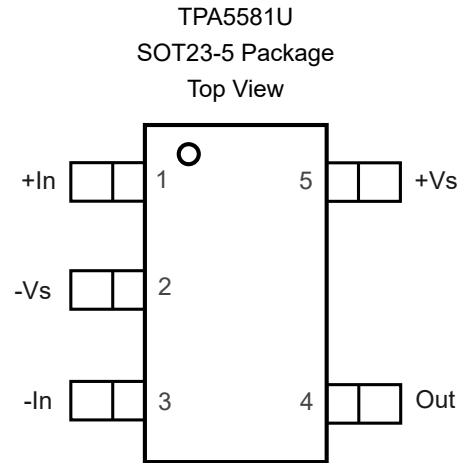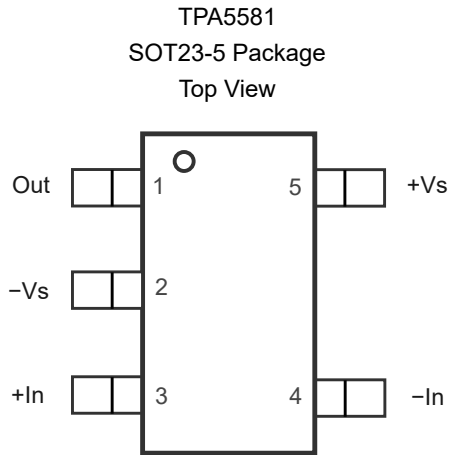**Pin Configuration and Functions**

**Table 1. Pin Functions: TPA5581, TPA5581U**

| Pin No. |          | Name | I/O    | Description           |
|---------|----------|------|--------|-----------------------|
| TPA5581 | TPA5581U |      |        |                       |
| 1       | 4        | Out  | Output | Output                |
| 2       | 2        | -Vs  |        | Negative power supply |
| 3       | 1        | +In  | Input  | Noninverting input    |
| 4       | 3        | -In  | Input  | Inverting input       |
| 5       | 5        | +Vs  |        | Positive power supply |

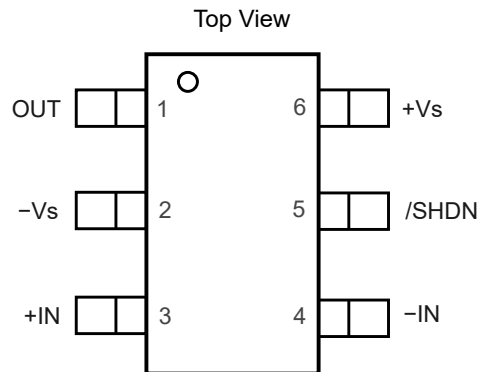TPA5581N  
SOT23-6 Package


**5-V, Zero-Drift, RRIO, 15-MHz, Precision Op Amp**

**Table 2. Pin Functions: TPA5581N**

| Pin No. | Name  | I/O    | Description  |
|---------|-------|--------|--|
| 1       | Out   | Output | Output   |
| 2       | -Vs   |        | Negative power supply  |
| 3       | +In   | Input  | Noninverting input   |
| 4       | -In   | Input  | Inverting input  |
| 5       | /SHDN | Input  | Shut down input. The device is shut down when the low-level input voltage is on the input; the device is active when the high-level input voltage is on the input. The device is active in default with a 10-MΩ internal pull-up resistor. |
| 6       | +Vs   |        | Positive power supply  |


TPA5582  
SOP8 Package  
Top View

TPA5582  
MSOP8 Package  
Top View

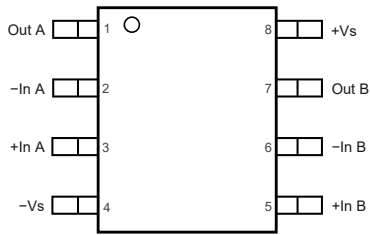5-V, Zero-Drift, RRIO, 15-MHz, Precision Op Amp



TPA5582  
TSSOP8  
Top View

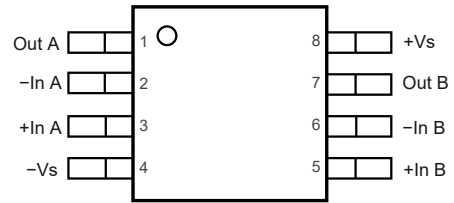

TPA5582  
DFN2X2-8  
Top View



TPA5582  
DFN3X3-8  
Top View



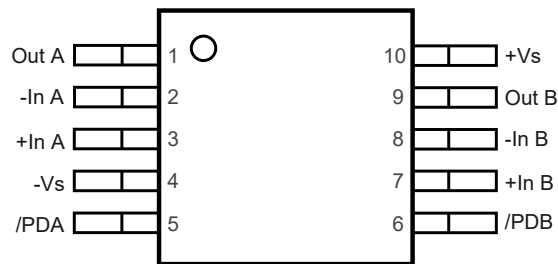


Table 3. Pin Functions: TPA5582

| Pin No. | Name  | I/O    | Description           |
|---------|-------|--------|-----------------------|
| 1       | Out A | Output | Output                |
| 2       | -In A | Input  | Inverting input       |
| 3       | +In A | Input  | Noninverting input    |
| 4       | -Vs   |        | Negative power supply |
| 5       | +In B | Input  | Noninverting input    |
| 6       | -In B | Input  | Inverting input       |
| 7       | Out B | Output | Output                |
| 8       | +Vs   |        | Positive power supply |

TPA5582  
MSOP-10  
Top View

**5-V, Zero-Drift, RRIO, 15-MHz, Precision Op Amp**

**Table 4. Pin Functions: TPA5582**

| Pin No. | Name  | I/O    | Description   |
|---------|-------|--------|---|
| 1       | Out A | Output | Output  |
| 2       | -In A | Input  | Inverting input   |
| 3       | +In A | Input  | Noninverting input  |
| 4       | -Vs   |        | Negative power supply   |
| 5       | /PD A | Input  | Shut down input of channel A. The device is shut down when the low-level input voltage is on the input; the device is active when the high-level input voltage is on the input. The device is active in default with a 10-M $\Omega$ internal pull-up resistor. |
| 6       | /PD B | Input  | Shut down input of channel B. The device is shut down when the low-level input voltage is on the input; the device is active when the high-level input voltage is on the input. The device is active in default with a 10-M $\Omega$ internal pull-up resistor. |
| 7       | +In B | Input  | Noninverting input  |
| 8       | -In B | Input  | Inverting input   |
| 9       | Out B | Output | Output  |
| 10      | +Vs   |        | Positive power supply   |

## Specifications

### Absolute Maximum Ratings <sup>(1)</sup>

Over operating ambient temperature, unless otherwise noted.

| Parameter   | Min                                     | Max                                     | Unit |
|---|---|---|------|
| Supply Voltage, (+V <sub>S</sub> ) – (–V <sub>S</sub> )         |   | 6.5                                     | V    |
| Input Voltage   | (–V <sub>S</sub> ) – 0.3                | (+V <sub>S</sub> ) + 0.3                | V    |
| Differential Input Voltage                                      | (–V <sub>S</sub> ) – (+V <sub>S</sub> ) | (+V <sub>S</sub> ) – (–V <sub>S</sub> ) | V    |
| Input Current: +I <sub>N</sub> , –I <sub>N</sub> <sup>(2)</sup> | –10                                     | 10                                      | mA   |
| Output Voltage  | (–V <sub>S</sub> ) – 0.3                | (+V <sub>S</sub> ) + 0.3                | V    |
| Output Short-Circuit Duration <sup>(3)</sup>                    |   | Infinite                                |      |
| Maximum Operating Junction Temperature                          |   | 150                                     | °C   |
| Operating Temperature Range                                     | –40                                     | 125                                     | °C   |
| Storage Temperature Range                                       | –65                                     | 150                                     | °C   |
| Lead Temperature (Soldering, 10 sec)                            |   | 260                                     | °C   |

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

(2) The inputs are protected by ESD protection diodes to negative power supply. If the input extends more than 300 mV beyond the negative power supply, the input current should be limited to less than 10 mA.

(3) A heat sink may be required to keep the junction temperature below the absolute maximum. This depends on the power supply voltage and how many amplifiers are shorted. Thermal resistance varies with the amount of PC board metal connected to the package. The specified values are for short traces connected to the leads.

### ESD, Electrostatic Discharge Protection

| Parameter |                          | Condition                             | Minimum Level | Unit |
|-----------|--------------------------|---------------------------------------|---------------|------|
| HBM       | Human Body Model ESD     | ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup> | 3             | kV   |
| CDM       | Charged Device Model ESD | ANSI/ESDA/JEDEC JS-002 <sup>(2)</sup> | 1.5           | kV   |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.



### Recommended Operating Conditions

| Parameter      |   | Min | Typ | Max | Unit |
|----------------|---|-----|-----|-----|------|
| V <sub>S</sub> | Supply Voltage, (+V <sub>S</sub> ) – (–V <sub>S</sub> ) | 2.7 |     | 5.5 | V    |
| T <sub>A</sub> | Operating Temperature Range                             | –40 |     | 125 | °C   |

### Thermal Information

| Package Type    | θ <sub>JA</sub> | θ <sub>Jc</sub> | Unit |
|-----------------|-----------------|-----------------|------|
| SOT353 (SC70-5) | 400             | 150             | °C/W |
| SOT23-5         | 250             | 81              | °C/W |
| SOP8            | 158             | 43              | °C/W |
| MSOP8           | 210             | 45              | °C/W |
| TSSOP8          | 191             | 44              | °C/W |
| DFN2X2-8        | 100             | 60              | °C/W |

**Electrical Characteristics**

 Test condition is at  $V_S = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ ,  $R_L = 10\text{ k}\Omega$ ,  $C_L = 100\text{ pF}$ , unless otherwise noted

| Parameter                    | Conditions                      | Min  | Typ              | Max              | Unit                         |               |
|------------------------------|---------------------------------|--|------------------|------------------|------------------------------|---------------|
| <b>Power Supply</b>          |                                 |  |                  |                  |                              |               |
| $V_S$                        | Supply Voltage Range            | 2.7  |                  | 5.5              | V                            |               |
| $I_Q$                        | Quiescent Current per Amplifier | $V_S = 2.7\text{ V to }5.5\text{ V}$   |                  | 1                | 1.2                          | mA            |
|                              |                                 | $V_S = 2.7\text{ V to }5.5\text{ V}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$            |                  |                  | 1.8                          | mA            |
|                              | Shutdown Current                | $V_S = 2.7\text{ to }5.5\text{ V}$ , /SHDN = 0 V   |                  | 7.5              |                              | $\mu\text{A}$ |
|                              |                                 | $V_S = 2.7\text{ to }5.5\text{ V}$ , /SHDN = 0 V, $T_A = -40^\circ\text{C to }125^\circ\text{C}$ |                  |                  | 21                           | $\mu\text{A}$ |
|                              | Input Logic High of Shutdown    | $T_A = -40^\circ\text{C to }125^\circ\text{C}$   | $0.7 \times V_S$ |                  | V                            |               |
|                              | Input Logic Low of Shutdown     | $T_A = -40^\circ\text{C to }125^\circ\text{C}$   |                  | $0.3 \times V_S$ | V                            |               |
| PSRR                         | Power Supply Rejection Ratio    | $V_S = 2.7\text{ V to }5.5\text{ V}$   | 114              | 124              |                              | dB            |
|                              |                                 | $V_S = 2.7\text{ V to }5.5\text{ V}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$            | 110              |                  |                              | dB            |
| <b>Input Characteristics</b> |                                 |  |                  |                  |                              |               |
| $V_{OS}$                     | Input Offset Voltage            | $V_S = 5\text{ V}$   | -10              | 1.2              | 10                           | $\mu\text{V}$ |
|                              |                                 | $V_S = 5\text{ V}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$                              | -20              |                  | 20                           | $\mu\text{V}$ |
|                              |                                 | $V_S = 3.3\text{ V}$   | -10              | 1.3              | 10                           | $\mu\text{V}$ |
|                              |                                 | $V_S = 3.3\text{ V}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$                            | -20              |                  | 20                           | $\mu\text{V}$ |
| $V_{OS\ TC}$                 | Input Offset Voltage Drift      | $T_A = -40^\circ\text{C to }125^\circ\text{C}$   |                  | 0.01             | $\mu\text{V}/^\circ\text{C}$ |               |
| $I_B$                        | Input Bias Current              | $V_S = 5\text{ V}$ , $V_{CM} = 2.5\text{ V}$   | -800             | 200              | 800                          | pA            |
|                              |                                 | $V_S = 5\text{ V}$ , $V_{CM} = 2.5\text{ V}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$    | -1500            |                  | 1500                         | pA            |
| $I_{OS}$                     | Input Offset Current            | $V_S = 5\text{ V}$ , $V_{CM} = 2.5\text{ V}$   | -400             | 120              | 400                          | pA            |
|                              |                                 | $V_S = 5\text{ V}$ , $V_{CM} = 2.5\text{ V}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$    | -1000            | 440              | 1000                         | pA            |
| $R_{IN}$                     |                                 |  | 50               |                  | G $\Omega$                   |               |
| $C_{IN}$                     | Input Capacitance               | Differential Mode  |                  | 2                |                              | pF            |
|                              |                                 | Common Mode  |                  | 5                |                              | pF            |
| $A_V$                        | Open-Loop Voltage Gain          | $V_O = 0.5\text{ V to }4.5\text{ V}$   | 120              | 150              |                              | dB            |
|                              |                                 | $V_O = 0.5\text{ V to }4.5\text{ V}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$            | 115              |                  |                              | dB            |
| $V_{CMR}$                    | Common-Mode Input Voltage Range | $T_A = -40^\circ\text{C to }125^\circ\text{C}$   | $(-V_S)-0.1$     |                  | $(+V_S)+0.1$                 | V             |
| CMRR                         | Common-Mode Rejection Ratio     | $V_{CM} = 0\text{ V to }5\text{ V}$  | 115              | 144              |                              | dB            |
|                              |                                 | $V_{CM} = 0\text{ V to }5\text{ V}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$             | 110              |                  |                              | dB            |

**5-V, Zero-Drift, RRIO, 15-MHz, Precision Op Amp**

| Parameter                     |  | Conditions  | Min | Typ    | Max | Unit                   |
|-------------------------------|--|---|-----|--------|-----|------------------------|
| <b>Output Characteristics</b> |  |   |     |        |     |                        |
|                               | Output Voltage Swing from Positive Rail or Negative Rail | $R_{LOAD} = 10\text{ k}\Omega$ to $V_S/2$   |     | 5      |     | mV                     |
|                               |  | $R_{LOAD} = 10\text{ k}\Omega$ to $V_S/2$ ,<br>$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$ |     |        | 10  | mV                     |
|                               |  | $R_{LOAD} = 2\text{ k}\Omega$ to $V_S/2$  |     | 22     |     | mV                     |
|                               |  | $R_{LOAD} = 2\text{ k}\Omega$ to $V_S/2$ ,<br>$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$  |     |        | 35  | mV                     |
| $I_{SC}$                      | Output Short-Circuit Current                             | Sink or Source  | 140 | 160    |     | mA                     |
|                               |  | Sink or Source,<br>$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$                             | 100 |        |     | mA                     |
| <b>AC Specifications</b>      |  |   |     |        |     |                        |
| GBW                           | Gain-Bandwidth Product                                   |   |     | 15     |     | MHz                    |
| SR                            | Slew Rate  | $G = 1$ , 2 V step  |     | 4.9    |     | V/ $\mu\text{s}$       |
| $t_{OR}$                      | Overload Recovery  |   |     | 5      |     | $\mu\text{s}$          |
| $t_s$                         | Settling Time, 0.1%                                      | $G = 1$ , 2 V step  |     | 3      |     | $\mu\text{s}$          |
|                               | Settling Time, 0.01%                                     |   |     | 4      |     | $\mu\text{s}$          |
| PM                            | Phase Margin   | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$   |     | 45     |     | $^\circ$               |
| GM                            | Gain Margin  | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$   |     | 10     |     | dB                     |
|                               | Channel Separation                                       | $f = 100\text{ kHz}$  |     | 120    |     | dB                     |
| <b>Noise Performance</b>      |  |   |     |        |     |                        |
| $E_N$                         | Input Voltage Noise                                      | $f = 0.1\text{ Hz}$ to $10\text{ Hz}$   |     | 0.2    |     | $\mu\text{V}_{PP}$     |
| $e_N$                         | Input Voltage Noise Density                              | $f = 1\text{ kHz}$  |     | 10     |     | nV/ $\sqrt{\text{Hz}}$ |
| $i_N$                         | Input Current Noise                                      | $f = 1\text{ kHz}$  |     | 200    |     | fA/ $\sqrt{\text{Hz}}$ |
| THD+N                         | Total Harmonic Distortion and Noise                      | $G = 1$ , $f = 1\text{ kHz}$ , $V_O = 1\text{ V}_{RMS}$ ,<br>$R_L = 2\text{ k}\Omega$           |     | 0.0007 |     | %                      |

### Typical Performance Characteristics

All test conditions:  $V_S = 5\text{ V}$ ,  $T_A = +25^\circ\text{C}$ , test device is TPA5581N-S6TR, unless otherwise noted.

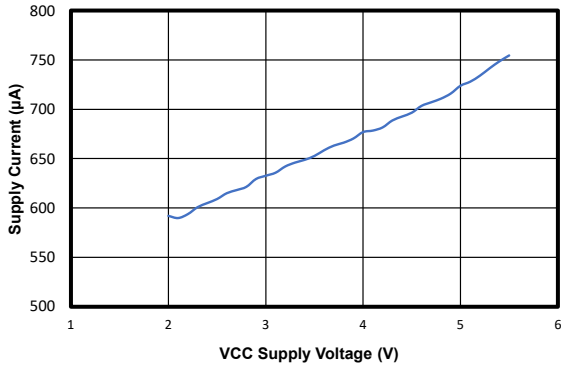


Figure 1. Supply Current vs Supply Voltage

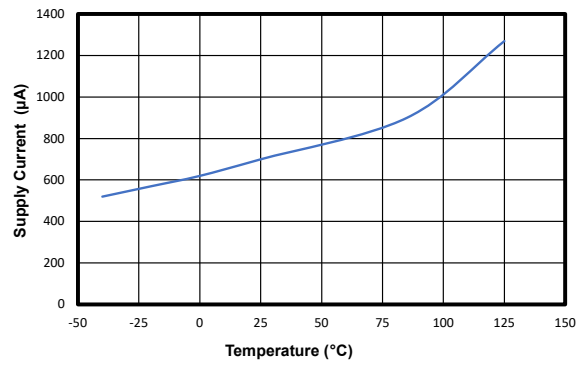


Figure 2. Supply Current vs Temperature

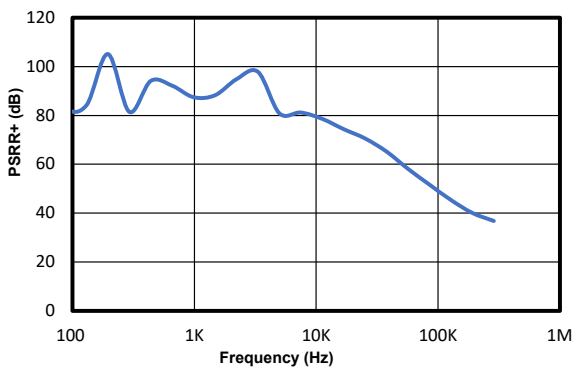


Figure 3. PSRR+ vs Frequency

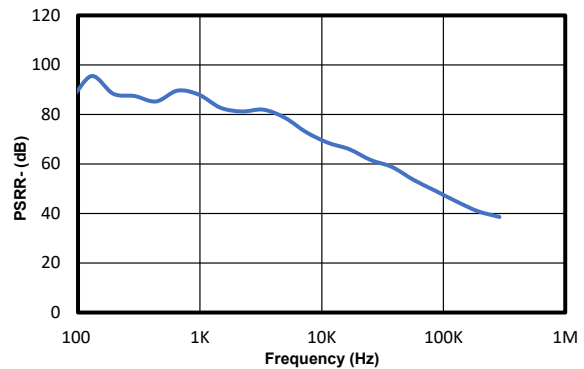


Figure 4. PSRR- vs Frequency

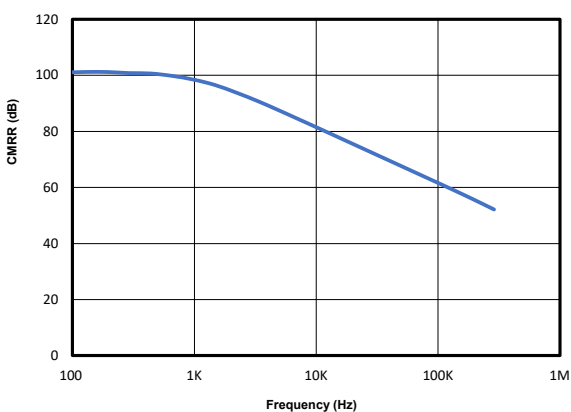


Figure 5. CMRR vs Frequency

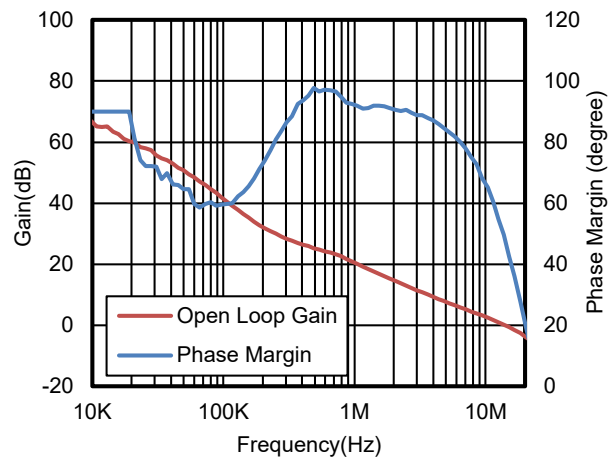


Figure 6. Open Loop Gain and Phase Margin vs Frequency,  $R_L = 10\text{ k}\Omega$ ,  $C_L = 100\text{ pF}$

5-V, Zero-Drift, RRIO, 15-MHz, Precision Op Amp

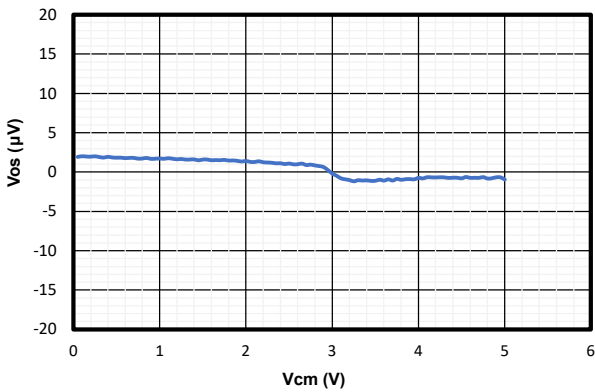


Figure 7.  $V_{OS}$  vs  $V_{CM}$ ,  $V_S = 5\text{ V}$

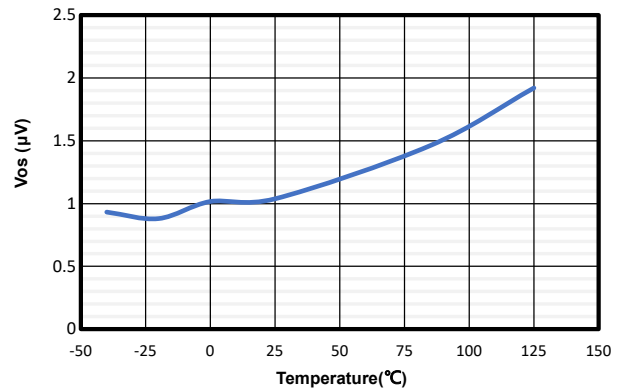


Figure 8.  $V_{OS}$  vs Temperature

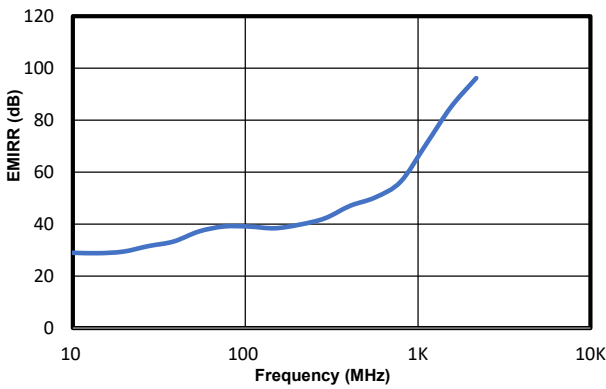


Figure 9. EMIRR vs Frequency

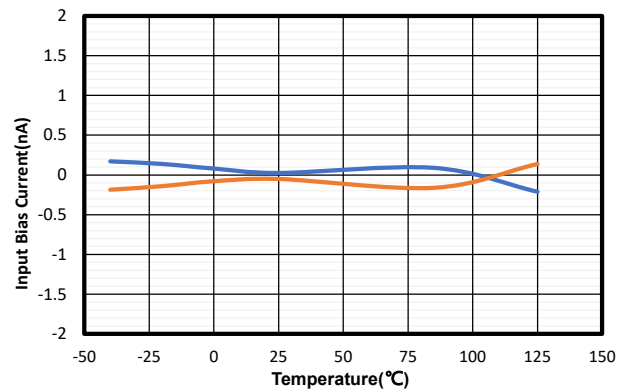


Figure 10.  $I_B$  vs Temperature

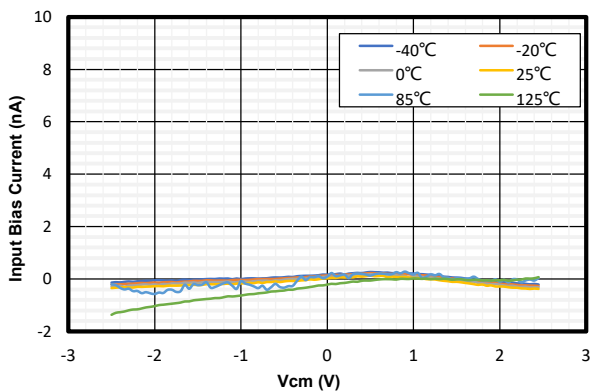


Figure 11.  $I_B$  vs Common Voltage,  $(-V_S) = -2.5\text{ V}$ ,  $(+V_S) = 2.5\text{ V}$

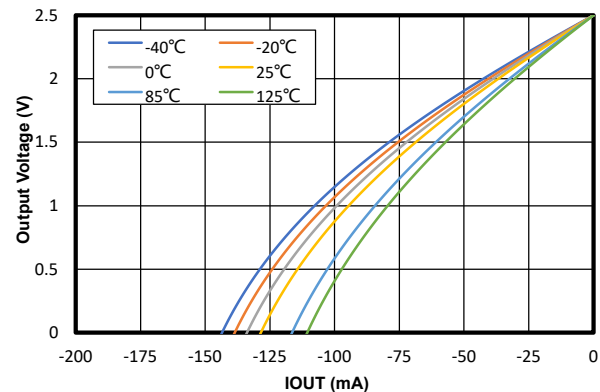


Figure 12. Output Voltage vs Output Current,  $(-V) = -2.5\text{ V}$ ,  $(+V_S) = 2.5\text{ V}$

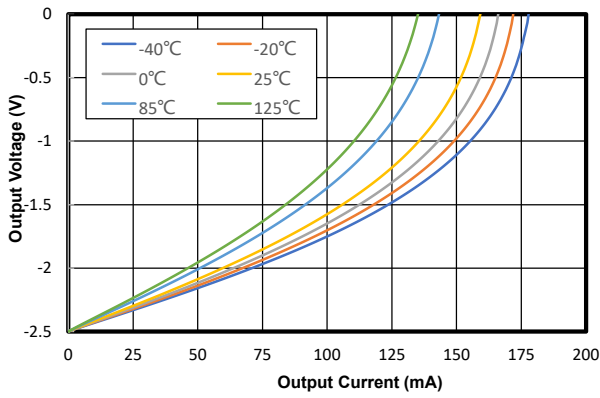


Figure 13. Output Voltage vs Output Current, (-VS) = -2.5 V, (+VS) = 2.5 V

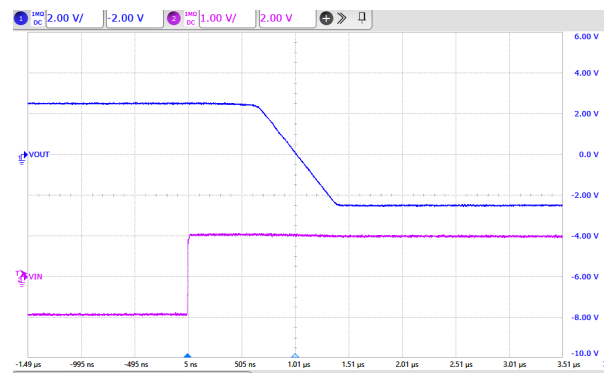


Figure 14. Overload Recovery at Negative Rail

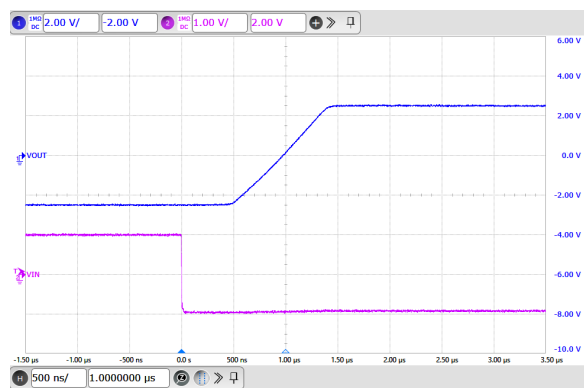


Figure 15. Overload Recovery at Positive Rail

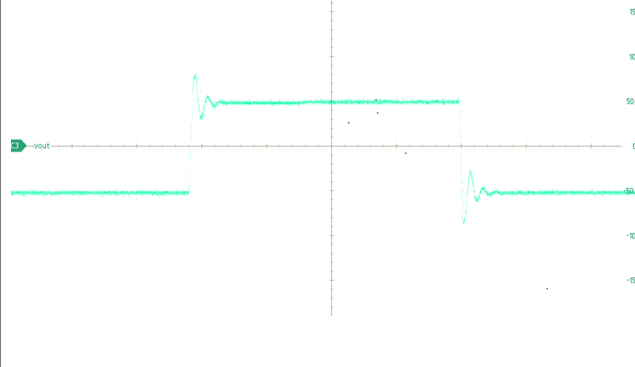


Figure 16. Small Signal Step Response: 50 mV/div, Time: 400 ns/div

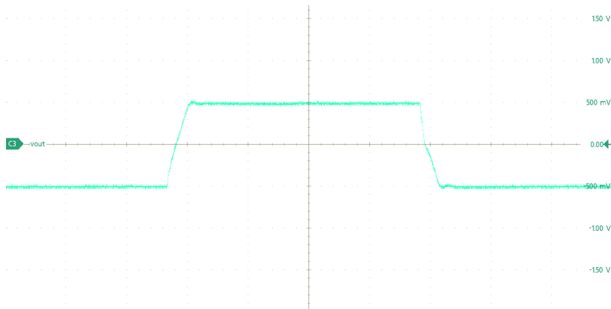


Figure 17. Large Signal Step Response: 500 mV/div, Time: 400 ns/div

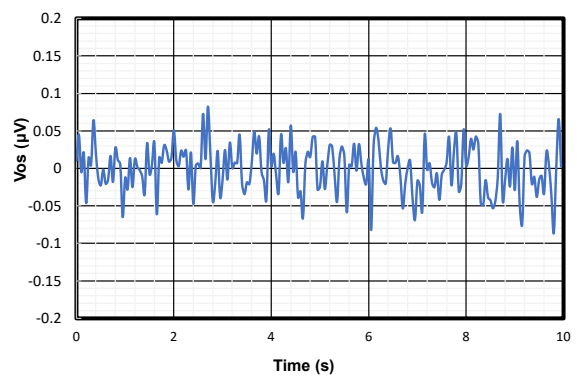


Figure 18. 0.1 to 10 Hz Voltage Noise,  $V_{CM} = 0 V$

5-V, Zero-Drift, RRIO, 15-MHz, Precision Op Amp

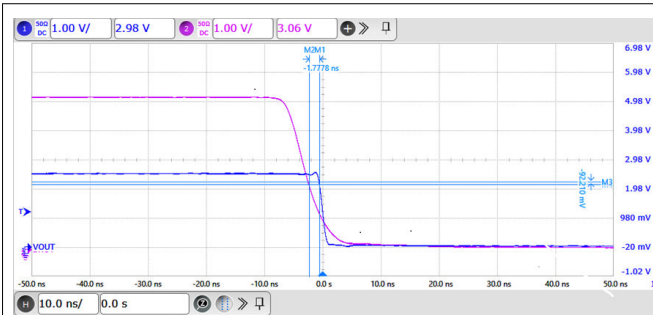


Figure 19. Turnoff Transient

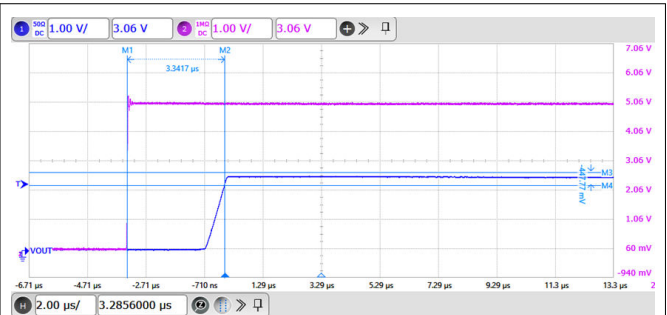


Figure 20. Turnon Transient

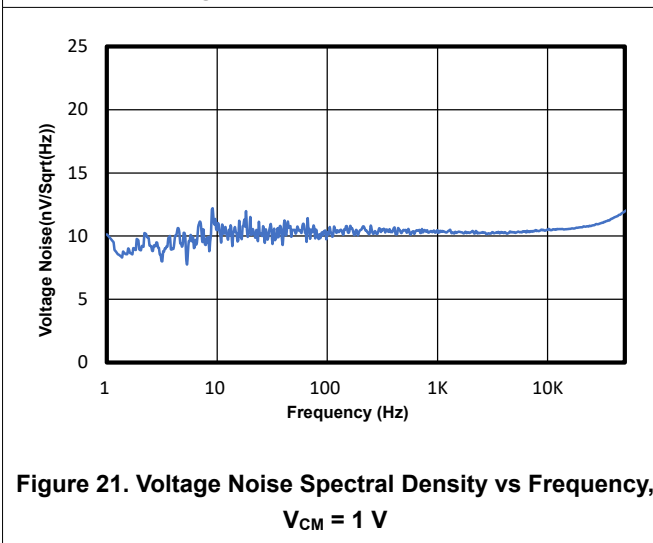


Figure 21. Voltage Noise Spectral Density vs Frequency,  $V_{CM} = 1\text{ V}$

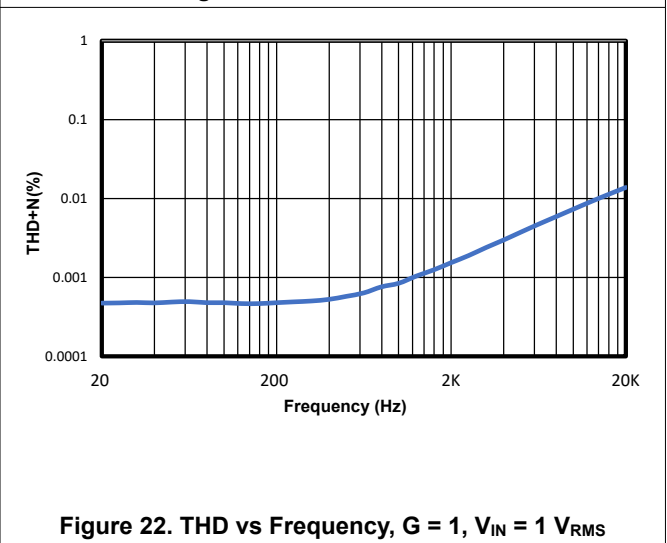


Figure 22. THD vs Frequency,  $G = 1$ ,  $V_{IN} = 1\text{ V}_{RMS}$

## Detailed Description

### Overview

The TPA558x family of zero-drift amplifiers can operate on a single-supply voltage (2.7 V to 5.5 V), or a split-supply voltage. With a precision auto-calibration technique, these amplifiers achieve low input offset voltage and input offset voltage drift which can achieve outstanding input and output dynamic linearity. The strengths of TPA558x also include 15-MHz bandwidth, no 1/f noise, 10-nV/ $\sqrt{\text{Hz}}$  noise spectral density, and 1 mA quiescent current, making the TPA558x suitable for many precision and temperature sensitive applications. Parameters that can exhibit variance with regard to operating voltage or temperature are presented in [Typical Performance Characteristics](#).

### Functional Block Diagram

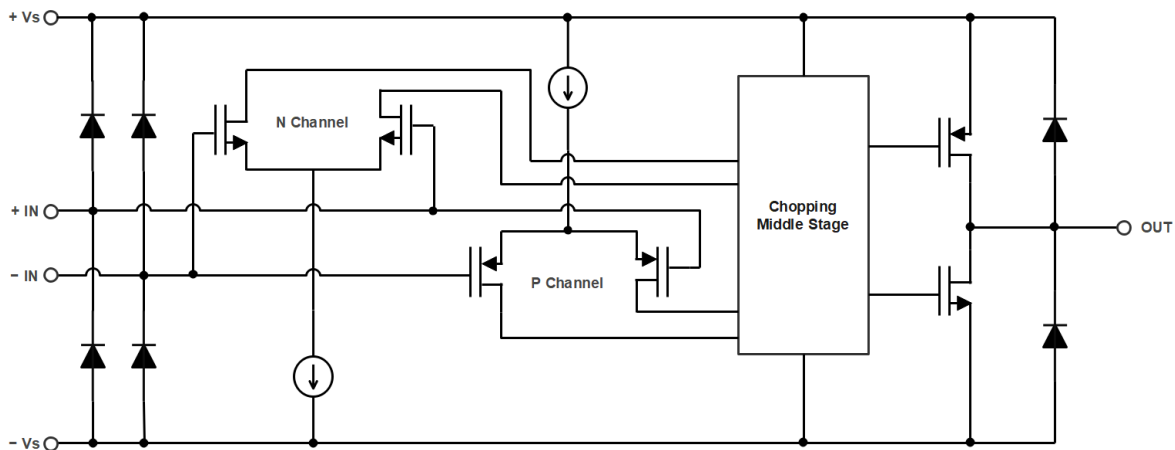


Figure 23. Functional Block Diagram

## Feature Description

### Operating Voltage

The TPA558x family of op amplifiers is designed for single supply operation from 2.7 V to 5.5 V or dual supply operation from  $\pm 1.35$  V to  $\pm 2.75$  V.

### Residual Voltage Ripple

The chopping technique can be used in amplifier design due to the internal notch filter. Although the chopping related voltage ripple is suppressed, higher noise spectrum exists at the chopping frequency and its harmonics due to the residual ripple.

The devices set the chopping frequency to 400 kHz. If the frequency of input signal is close to the chopping frequency, the signal may be interfered by the residue ripple. To suppress the noise at the chopping frequency, it is recommended that a post filter to be placed at the output of the amplifier.

### Rail-to-Rail Input

The input common-mode voltage range of the TPA558x family extends 100 mV beyond the supply rails. This performance is achieved with a complementary input stage: a P-channel input differential pair in parallel with an N-channel differential pair. The P-channel pair is active for inputs from 100 mV below the negative supply to approximately  $(+V_S) - 1.5$  V, whereas the N-channel pair is active for input voltages close to the positive rail, typically  $(+V_S) - 1.5$  V to 100 mV above the positive



---

**5-V, Zero-Drift, RRIO, 15-MHz, Precision Op Amp**

supply. There is around 200-mV transition region at  $(+VS) - 1.5\text{ V}$  where both pairs are on. Within this transition region, PSRR, CMRR, offset voltage, offset drift, and THD can degrade comparing to that operating outside this region.

**Rail-to-Rail Output**

The TPA558x family delivers rail-to-rail output swing capability with a class-AB output stage. Different load conditions change the ability of the amplifier to swing close to the rails.

**Shutdown Function**

The shutdown function of the TPA558x is only available in the TPA558xN series. The voltage level of this is referenced to the supply voltage of the operational amplifier. The operational amplifier is enabled with a valid high voltage and shutdown by a valid low voltage. When the single supply is used, a valid high level is defined as  $0.7 \times (+Vs)$  of the positive supply and a valid low level is defined as  $0.3 \times (+Vs)$  of the positive supply. For example, with  $+Vs$  at 5 V and  $-Vs$  at 0 V, a valid high level is defined as 3.5 V and a valid low level is defined as 1.5 V. If dual or split power supplies are used, make sure the valid high or valid low input signals are properly referred to the positive supply voltage. For example, with  $+Vs$  at 2.5V and  $-Vs$  at -2.5V, a valid high level is defined as 1 V and a valid low level is defined as -1 V. The pin of SHDN is internally pulled up to a valid high level when this pin is left open state, so the amplifier is enabled initially if nothing is connected to the shutdown pin. The output state of the amplifier is assumed as high-impedance state if shut down. The specific requirement and performance about this function are provided in the [Typical Performance Characteristics](#) (see [Figure 19](#) and [Figure 20](#)). The output state of the amplifier is assumed as high-impedance state if shut down.

## Application and Implementation


Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

## Application Information

### Low-Side Current Sensing Application

Figure 24 shows the device configured in a low-side current sensing application. The low-side current sensing method consists of placing a sense resistor between the load and the circuit ground. The voltage dropping across the resistor is amplified by different amplifier circuits with the device. The  $V_{REF}$  can be used to add bias voltage to the output voltage. Particular attention must be paid to the matching and precision of R1, R2, R3, and R4, to maximize the accuracy of the measurement.

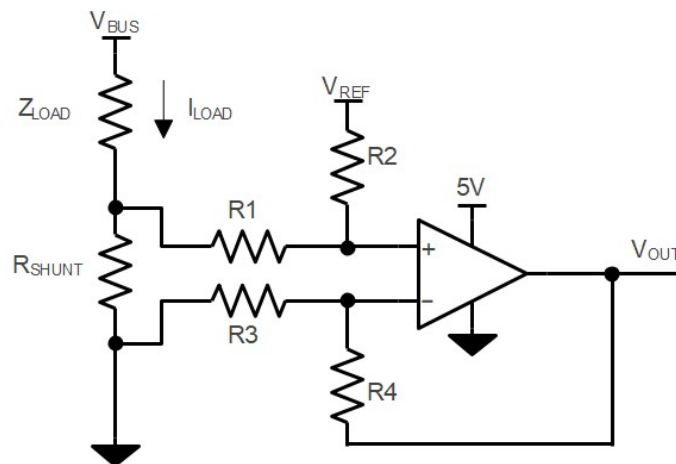

$$V_{OUT} = (I_{LOAD} \times R_{SHUNT}) \times (R2 / R1) + V_{REF}$$


When  $R3 = R1, R2 = R4, R_{SHUNT} \ll R1$

Figure 24. Low-Side Current Sensing Application

### Power Supply Recommendations

Place 0.1- $\mu$ F bypass capacitors close to the power supply pins for reducing coupling errors from the noisy or high-impedance power supplies.

### Tape and Reel Information

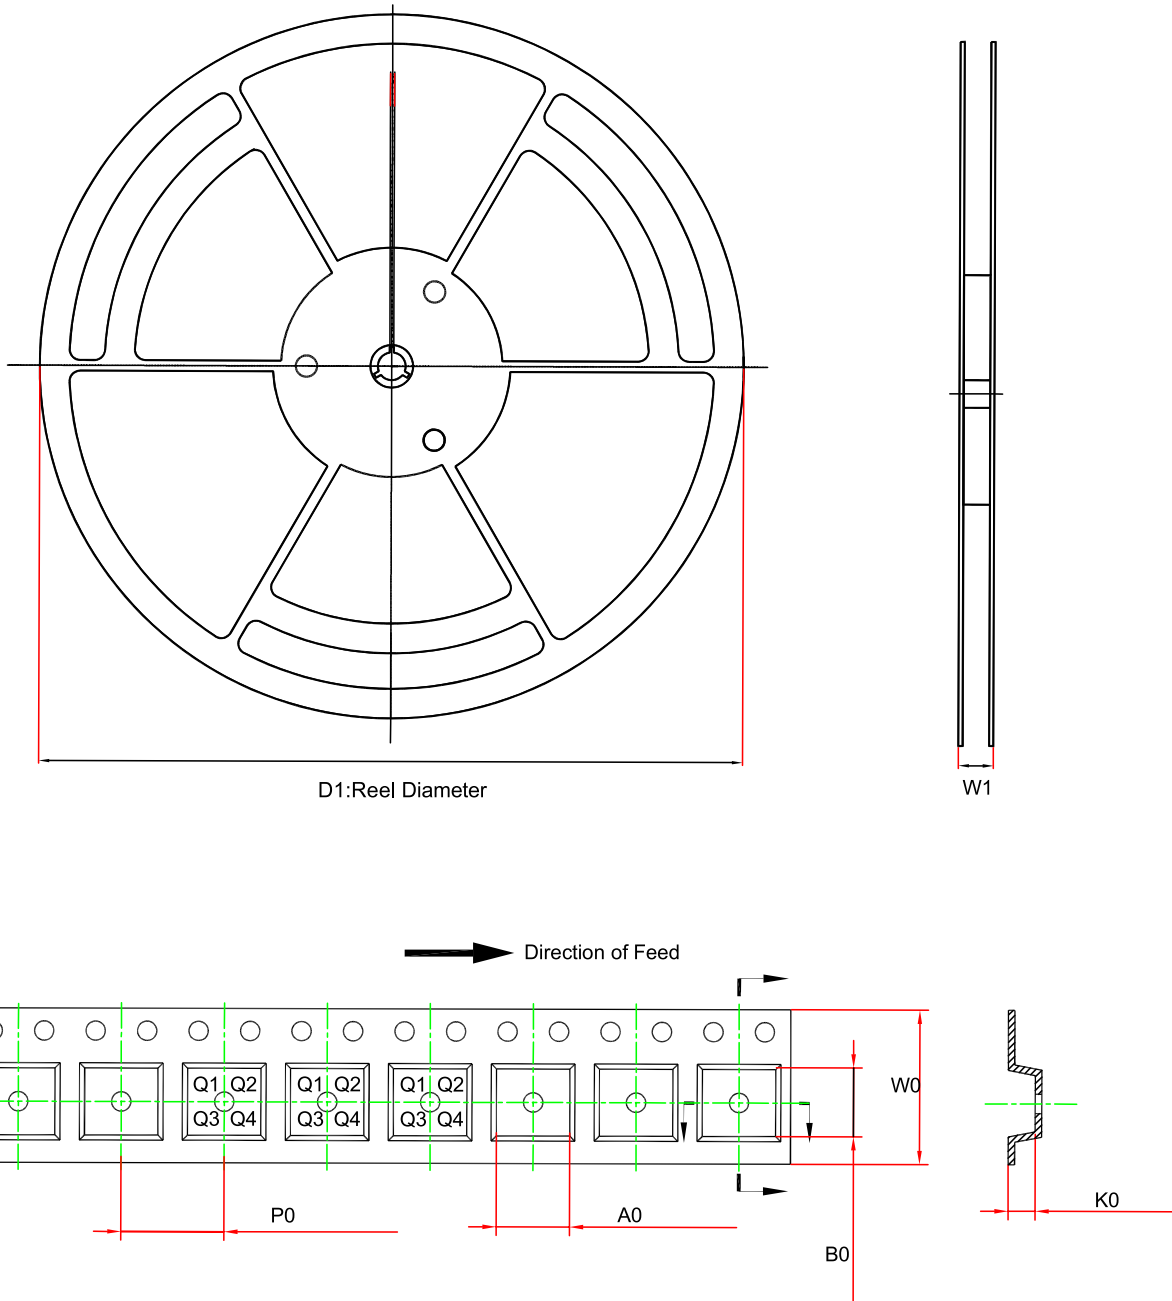


| Order Number  | Package         | D1 (mm) | W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | W0 (mm) | Pin1 Quadrant |
|---------------|-----------------|---------|---------|---------|---------|---------|---------|---------|---------------|
| TPA5581-SC5R  | SOT353 (SC70-5) | 178.0   | 12.3    | 2.4     | 2.5     | 1.2     | 4.0     | 8.0     | Q3            |
| TPA5581U-SC5R | SOT353 (SC70-5) | 178.0   | 12.3    | 2.4     | 2.5     | 1.2     | 4.0     | 8.0     | Q3            |
| TPA5581N-S6TR | SOT23-6         | 178.0   | 11.4    | 3.3     | 3.2     | 1.4     | 4.0     | 8.0     | Q3            |
| TPA5581-S5TR  | SOT23-5         | 178.0   | 11.4    | 3.3     | 3.2     | 1.4     | 4.0     | 8.0     | Q3            |
| TPA5581U-S5TR | SOT23-5         | 178.0   | 11.4    | 3.3     | 3.2     | 1.4     | 4.0     | 8.0     | Q3            |
| TPA5582-SO1R  | SOP8            | 330.0   | 16.8    | 6.6     | 5.5     | 2.1     | 8.0     | 12.0    | Q1            |

**5-V, Zero-Drift, RRIO, 15-MHz, Precision Op Amp**

| Order Number  | Package  | D1<br>(mm) | W1<br>(mm) | A0<br>(mm) | B0<br>(mm) | K0<br>(mm) | P0<br>(mm) | W0<br>(mm) | Pin1<br>Quadrant |
|---------------|----------|------------|------------|------------|------------|------------|------------|------------|------------------|
| TPA5582-DF7R  | DFN3X3-8 | 330.0      | 17.6       | 3.3        | 3.3        | 1.1        | 8.0        | 12.0       | Q1               |
| TPA5582-DF4R  | DFN2X2-8 | 180.0      | 13.1       | 2.3        | 2.3        | 1.1        | 4.0        | 8.0        | Q1               |
| TPA5582-TS1R  | TSSOP8   | 330.0      | 17.6       | 6.8        | 3.3        | 1.2        | 8.0        | 12.0       | Q1               |
| TPA5582-VS1R  | MSOP8    | 330.0      | 17.6       | 5.2        | 3.3        | 1.5        | 8.0        | 12.0       | Q1               |
| TPA5582N-VS2R | MSOP10   | 330.0      | 17.6       | 5.2        | 3.3        | 1.5        | 8.0        | 12.0       | Q1               |

Package Outline Dimensions


SOT23-5

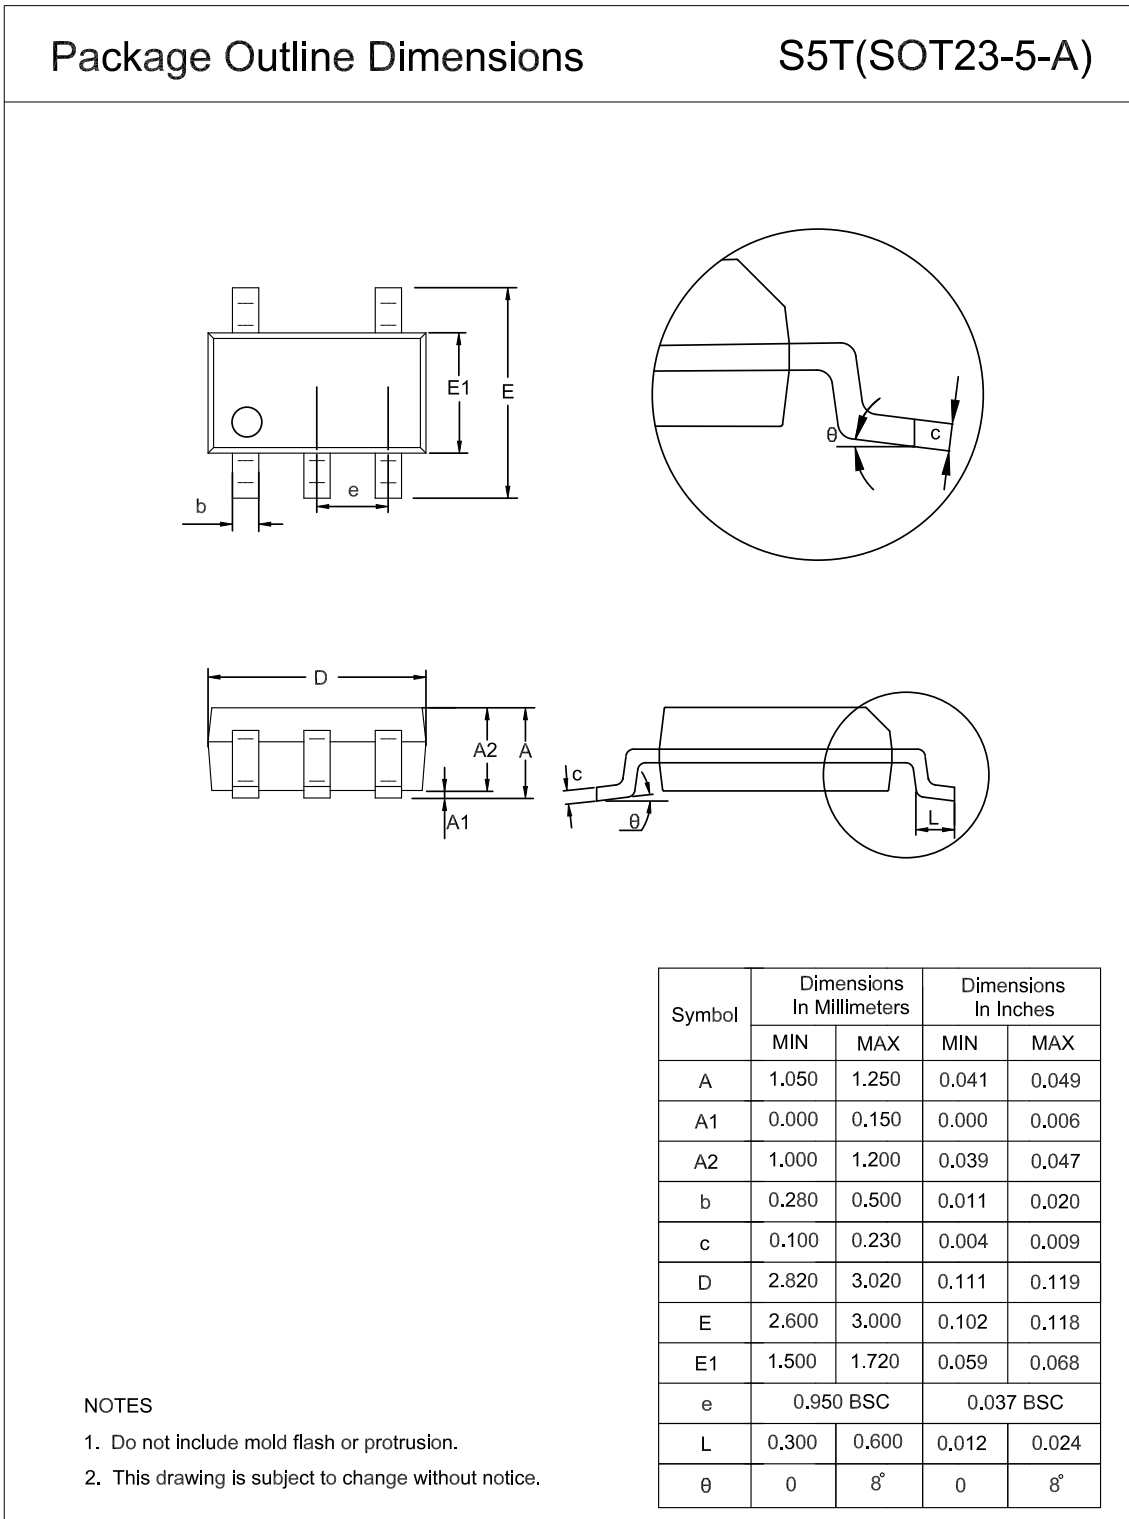

SOT23-6

Package Outline Dimensions

S6T(SOT23-6-A)

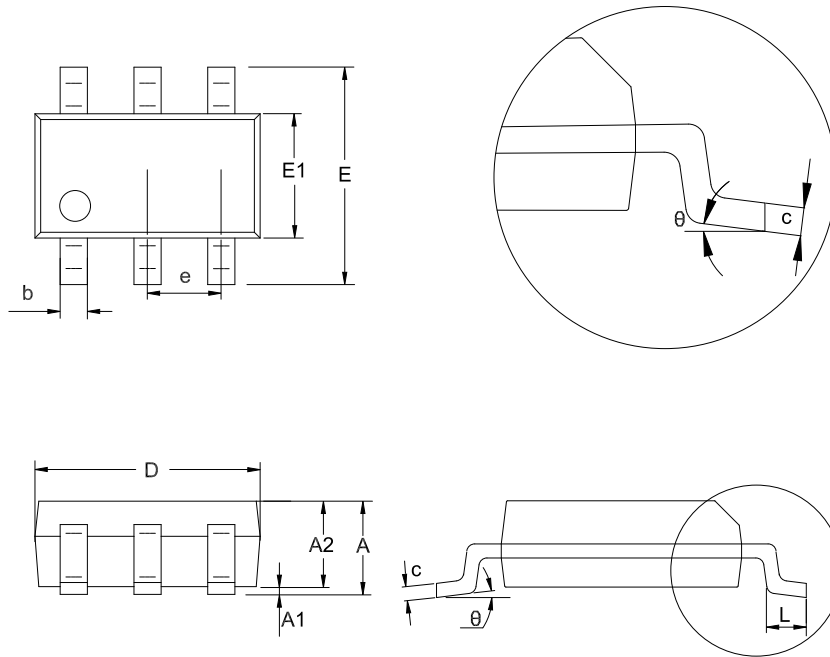

| Symbol | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|--------|------------------------------|-------|-------------------------|-------|
|        | MIN                          | MAX   | MIN                     | MAX   |
| A      | 1.050                        | 1.250 | 0.041                   | 0.049 |
| A1     | 0.000                        | 0.150 | 0.000                   | 0.006 |
| A2     | 1.000                        | 1.200 | 0.039                   | 0.047 |
| b      | 0.280                        | 0.500 | 0.011                   | 0.020 |
| c      | 0.100                        | 0.230 | 0.004                   | 0.009 |
| D      | 2.820                        | 3.020 | 0.111                   | 0.119 |
| E      | 2.600                        | 3.000 | 0.102                   | 0.118 |
| E1     | 1.500                        | 1.720 | 0.059                   | 0.068 |
| e      | 0.950 BSC                    |       | 0.037 BSC               |       |
| L      | 0.300                        | 0.600 | 0.012                   | 0.024 |
| theta  | 0                            | 8°    | 0                       | 8°    |





NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

SOT353-5

Package Outline Dimensions

SC5(SOT353-5-A)

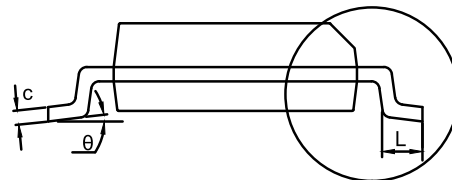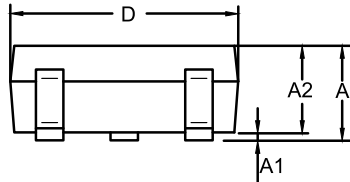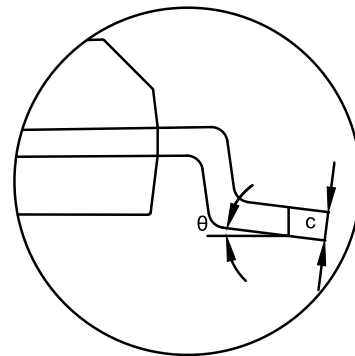

| Symbol   | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|----------|------------------------------|-------|-------------------------|-------|
|          | MIN                          | MAX   | MIN                     | MAX   |
| A        | 0.850                        | 1.100 | 0.033                   | 0.043 |
| A1       | 0.000                        | 0.100 | 0.000                   | 0.004 |
| A2       | 0.800                        | 1.000 | 0.031                   | 0.039 |
| b        | 0.150                        | 0.350 | 0.006                   | 0.014 |
| c        | 0.110                        | 0.230 | 0.004                   | 0.009 |
| D        | 2.000                        | 2.200 | 0.079                   | 0.087 |
| E        | 2.150                        | 2.450 | 0.085                   | 0.096 |
| E1       | 1.150                        | 1.350 | 0.045                   | 0.053 |
| e        | 0.650 BSC                    |       | 0.026 BSC               |       |
| L        | 0.260                        | 0.460 | 0.010                   | 0.018 |
| $\theta$ | 0                            | 8°    | 0                       | 8°    |




NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

TSSOP8

Package Outline Dimensions

TS1(TSSOP-8-A)

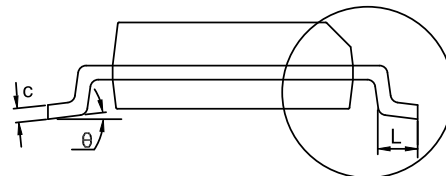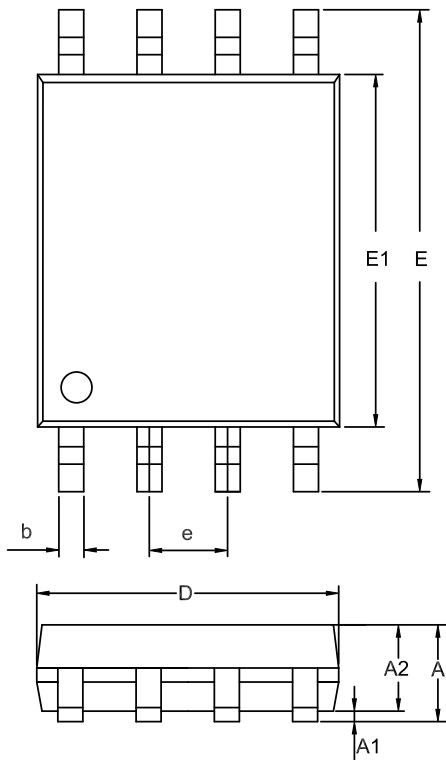

| Symbol   | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|----------|------------------------------|-------|-------------------------|-------|
|          | MIN                          | MAX   | MIN                     | MAX   |
| A        | 0.900                        | 1.200 | 0.035                   | 0.047 |
| A1       | 0.050                        | 0.150 | 0.002                   | 0.006 |
| A2       | 0.800                        | 1.050 | 0.031                   | 0.041 |
| b        | 0.190                        | 0.300 | 0.007                   | 0.012 |
| c        | 0.090                        | 0.200 | 0.004                   | 0.008 |
| D        | 2.900                        | 3.100 | 0.114                   | 0.122 |
| E        | 6.200                        | 6.600 | 0.244                   | 0.260 |
| E1       | 4.300                        | 4.500 | 0.169                   | 0.177 |
| e        | 0.650 BSC                    |       | 0.026 BSC               |       |
| L        | 0.450                        | 0.750 | 0.018                   | 0.030 |
| $\theta$ | 0                            | 8°    | 0                       | 8°    |

NOTES





1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.



MSOP8

Package Outline Dimensions

VS1(MSOP-8-A)

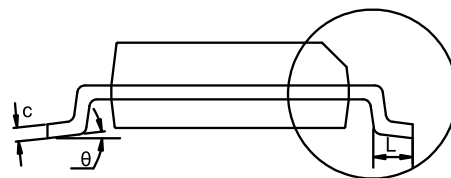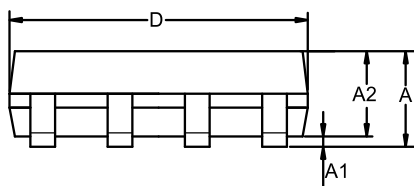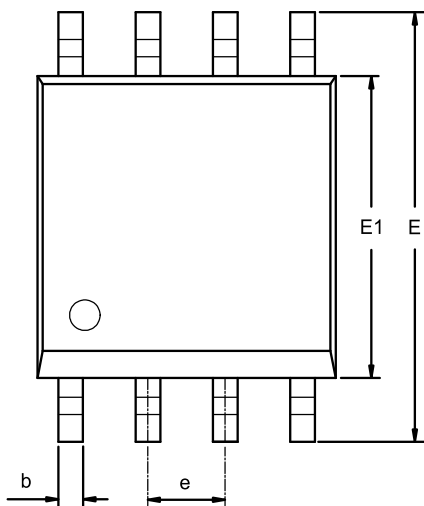

| Symbol   | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|----------|------------------------------|-------|-------------------------|-------|
|          | MIN                          | MAX   | MIN                     | MAX   |
| A        | 0.800                        | 1.100 | 0.031                   | 0.043 |
| A1       | 0.020                        | 0.150 | 0.001                   | 0.006 |
| A2       | 0.750                        | 0.950 | 0.030                   | 0.037 |
| b        | 0.250                        | 0.380 | 0.010                   | 0.015 |
| c        | 0.090                        | 0.230 | 0.004                   | 0.009 |
| D        | 2.900                        | 3.100 | 0.114                   | 0.122 |
| E        | 4.700                        | 5.100 | 0.185                   | 0.201 |
| E1       | 2.900                        | 3.100 | 0.114                   | 0.122 |
| e        | 0.650 BSC                    |       | 0.026 BSC               |       |
| L        | 0.400                        | 0.800 | 0.016                   | 0.031 |
| $\theta$ | 0                            | 8°    | 0                       | 8°    |





NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

MSOP10

Package Outline Dimensions

VS2(MSOP-10-A)

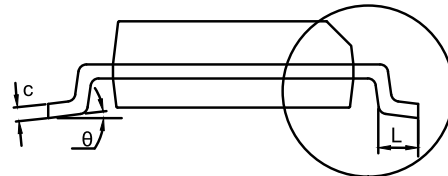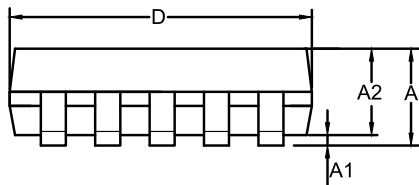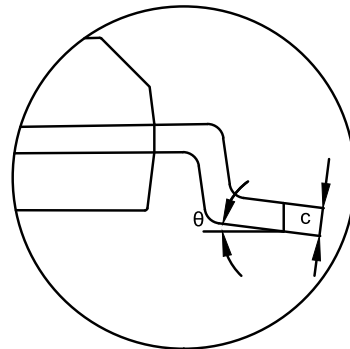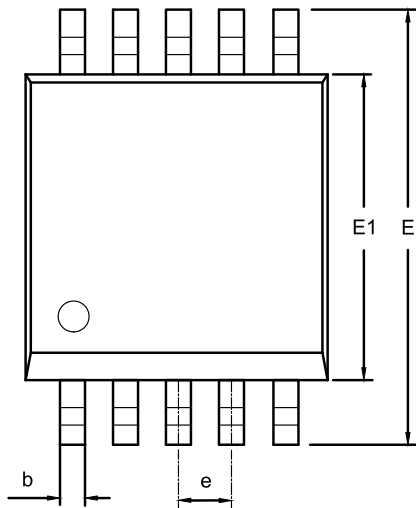

| Symbol | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|--------|------------------------------|-------|-------------------------|-------|
|        | MIN                          | MAX   | MIN                     | MAX   |
| A      | 0.800                        | 1.100 | 0.031                   | 0.043 |
| A1     | 0.050                        | 0.150 | 0.002                   | 0.006 |
| A2     | 0.750                        | 0.950 | 0.030                   | 0.037 |
| b      | 0.180                        | 0.280 | 0.007                   | 0.011 |
| c      | 0.090                        | 0.230 | 0.004                   | 0.009 |
| D      | 2.900                        | 3.100 | 0.114                   | 0.122 |
| E      | 4.700                        | 5.100 | 0.185                   | 0.201 |
| E1     | 2.900                        | 3.100 | 0.114                   | 0.122 |
| e      | 0.500 BSC                    |       | 0.020 BSC               |       |
| L      | 0.400                        | 0.800 | 0.016                   | 0.031 |
| theta  | 0                            | 8°    | 0                       | 8°    |


NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

SOP8

Package Outline Dimensions

SO1(SOP-8-A)

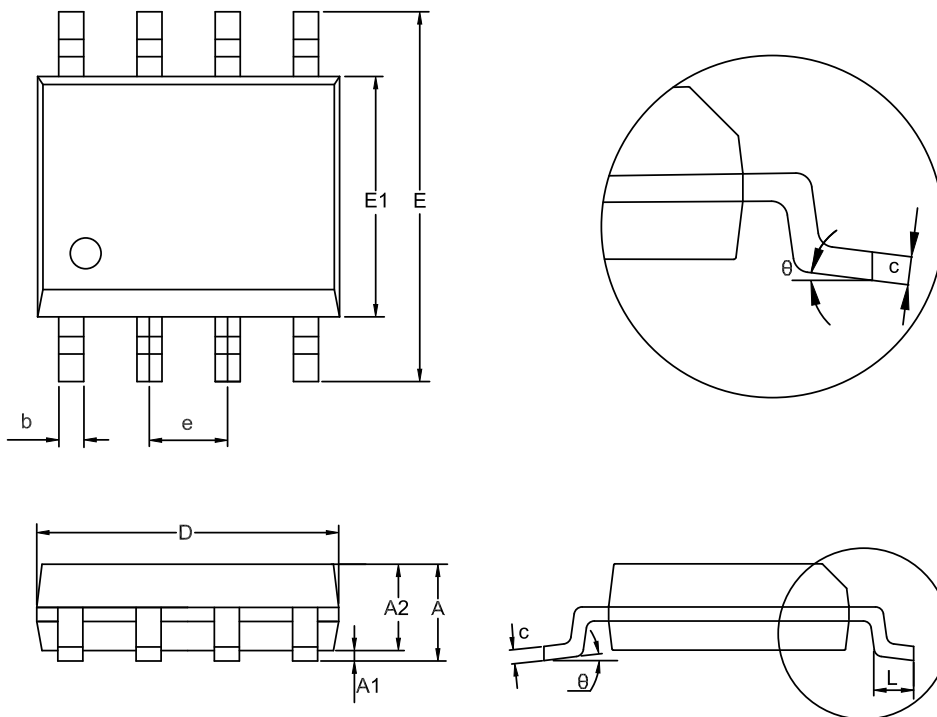

| Symbol | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|--------|------------------------------|-------|-------------------------|-------|
|        | MIN                          | MAX   | MIN                     | MAX   |
| A      | 1.350                        | 1.750 | 0.053                   | 0.069 |
| A1     | 0.050                        | 0.250 | 0.002                   | 0.010 |
| A2     | 1.250                        | 1.550 | 0.049                   | 0.061 |
| b      | 0.330                        | 0.510 | 0.013                   | 0.020 |
| c      | 0.170                        | 0.250 | 0.007                   | 0.010 |
| D      | 4.700                        | 5.100 | 0.185                   | 0.201 |
| E      | 5.800                        | 6.200 | 0.228                   | 0.244 |
| E1     | 3.800                        | 4.000 | 0.150                   | 0.157 |
| e      | 1.270 BSC                    |       | 0.050 BSC               |       |
| L      | 0.400                        | 1.000 | 0.016                   | 0.039 |
| theta  | 0                            | 8°    | 0                       | 8°    |


NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.


DFN2X2-8

Package Outline Dimensions


DF4(DFN2X2-8-D)

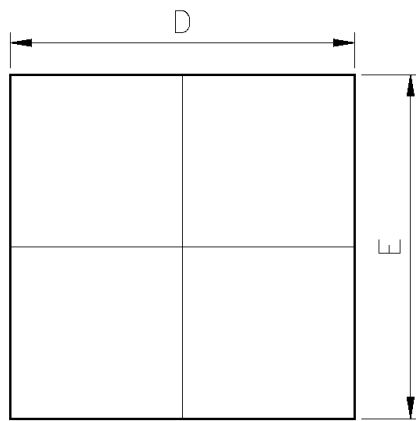

Top View

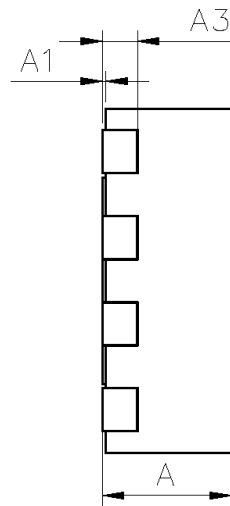

Side View

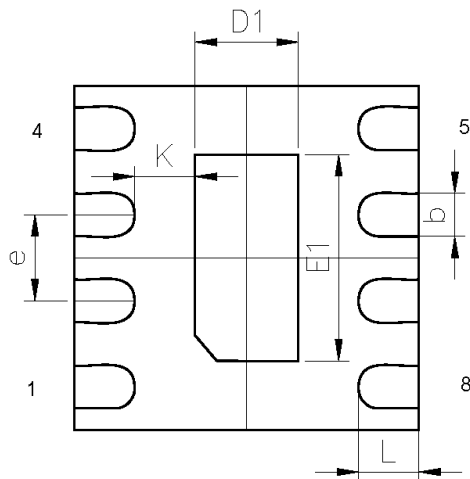


Bottom View

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | MIN                       | MAX   | MIN                  | MAX   |
| A      | 0.700                     | 0.800 | 0.028                | 0.031 |
| A1     | 0.000                     | 0.050 | 0.000                | 0.002 |
| b      | 0.180                     | 0.300 | 0.007                | 0.012 |
| A3     | 0.150                     | 0.250 | 0.006                | 0.010 |
| D      | 1.900                     | 2.100 | 0.075                | 0.083 |
| D1     | 0.800                     | 1.000 | 0.031                | 0.039 |
| E      | 1.900                     | 2.100 | 0.075                | 0.083 |
| E1     | 1.500                     | 1.700 | 0.059                | 0.067 |
| e      | 0.500 BSC                 |       | 0.020BSC             |       |
| L      | 0.250                     | 0.350 | 0.010                | 0.014 |

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

DFN3X3-8

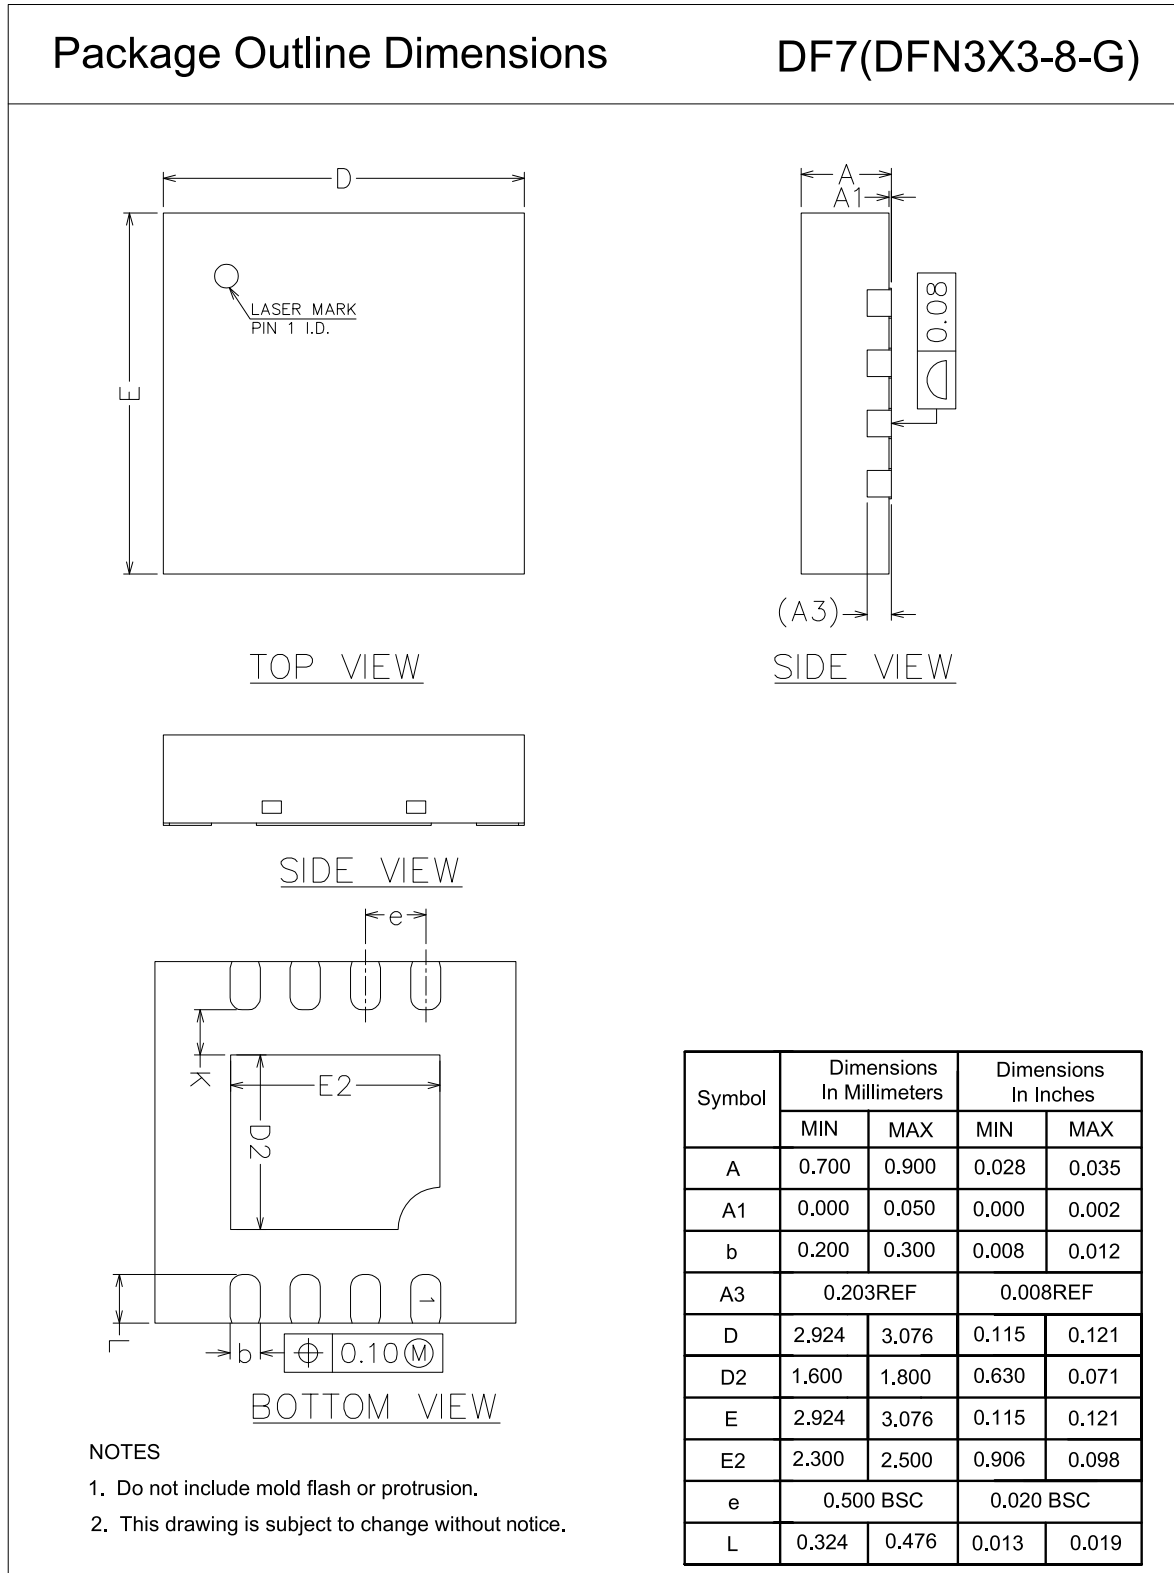

**Order Information**

| Order Number                 | Operating Temperature Range | Package         | Marking Information | MSL | Transport Media, Quantity | Eco Plan |
|------------------------------|-----------------------------|-----------------|---------------------|-----|---------------------------|----------|
| TPA5581-SC5R <sup>(3)</sup>  | -40 to 125°C                | SOT353 (SC70-5) | 581                 | 3   | Tape and Reel, 3000       | Green    |
| TPA5581U-SC5R <sup>(3)</sup> | -40 to 125°C                | SOT353 (SC70-5) | 58U                 | 3   | Tape and Reel, 3000       | Green    |
| TPA5581N-S6TR                | -40 to 125°C                | SOT23-6         | 58N                 | 3   | Tape and Reel, 3000       | Green    |
| TPA5581-S5TR                 | -40 to 125°C                | SOT23-5         | 581                 | 3   | Tape and Reel, 3000       | Green    |
| TPA5581U-S5TR <sup>(3)</sup> | -40 to 125°C                | SOT23-5         | 58U                 | 3   | Tape and Reel, 3000       | Green    |
| TPA5582-SO1R                 | -40 to 125°C                | SOP8            | A5582               | 3   | Tape and Reel, 4000       | Green    |
| TPA5582-DF4R                 | -40 to 125°C                | DFN2X2-8        | 558                 | 3   | Tape and Reel, 3000       | Green    |
| TPA5582-TS1R <sup>(3)</sup>  | -40 to 125°C                | TSSOP8          | A5582               | 3   | Tape and Reel, 3000       | Green    |
| TPA5582-DF7R <sup>(3)</sup>  | -40 to 125°C                | DFN3X3-8        | 558                 | 3   | Tape and Reel, 3000       | Green    |
| TPA5582N-VS2R <sup>(3)</sup> | -40 to 125°C                | MSOP10          | 5582N               | 3   | Tape and Reel, 3000       | Green    |
| TPA5582-VS1R                 | -40 to 125°C                | MSOP8           | A5582               | 3   | Tape and Reel, 3000       | Green    |

(1) The sample will be ready in 1 month.

(2) The sample will be ready in 2 months after the manufacture starts.

(3) For future products, contact the 3PEAK factory for more information and samples.

**Green:** 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

## IMPORTANT NOTICE AND DISCLAIMER

**Copyright**© 3PEAK 2012-2023. All rights reserved.

**Trademarks.** Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

**Performance Information.** Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

**Disclaimer.** 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.

This page intentionally left blank