

## 40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout Linear Regulator

### Features

- Input Voltage: 3 V to 40 V
- Output Voltage:
  - Fixed 5 V and 3.3 V
- $\pm 2\%$  Output Accuracy Over Line Regulation, Load Regulation, and Operating Temperature Range
- Low Current Consumption:
  - 400-nA Shutdown Current
  - 3- $\mu$ A Typical Quiescent Current
- 300-mA Maximum Output Current
- Low Dropout Voltage: 440 mV typical at 200 mA Load Current
- Stable with 1- $\mu$ F to 200- $\mu$ F Output Capacitor with ESR Range from 0.001  $\Omega$  to 5  $\Omega$
- Integrated Protection:
  - Over-Current Protection
  - Over-Temperature Protection
- Package Options:
  - SOT89-3
  - SOT23-5
  - SOT223-3

### Applications

- Handheld Devices with Battery Power Supply
- POS and Power Tools
- Meters and Smoke Detector
- Industrial Control
- Wireless and IoT Modules

### Description

The TPL8031 series products support operating with 3 V to 40 V (45-V maximum transient voltage).


The TPL8031 series products are 3- $\mu$ A ultra-low quiescent low-dropout voltage linear regulators with 300-mA maximum output current capability.

With the above features, the TPL8031 series products are the optimal solutions for handheld devices with battery power supply, POS, Power Tools, and Wireless Modules.

The TPL8031 series provides fixed 5-V and 3.3-V output voltage options, and the TPL8031 supports a wide range of output capacitors from 1  $\mu$ F to 200  $\mu$ F with an ESR range from 0.001  $\Omega$  to 5  $\Omega$ . Also, the TPL8031 series integrates over-current protection and over-temperature protection.

The TPL8031 series products operate in the ambient temperature range from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

### Typical Application Circuit

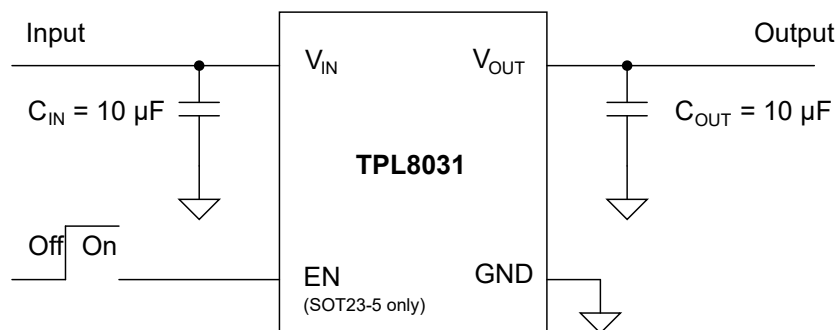

---

**40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout  
Linear Regulator****Table of Contents**

<b>Features</b> .....	<b>1</b>
<b>Applications</b> .....	<b>1</b>
<b>Description</b> .....	<b>1</b>
<b>Typical Application Circuit</b> .....	<b>1</b>
<b>Product Family Table</b> .....	<b>3</b>
<b>Revision History</b> .....	<b>3</b>
<b>Pin Configuration and Functions</b> .....	<b>4</b>
<b>Specifications</b> .....	<b>5</b>
Absolute Maximum Ratings .....	5
ESD, Electrostatic Discharge Protection.....	5
Recommended Operating Conditions.....	5
Thermal Information.....	5
Electrical Characteristics.....	6
Typical Performance Characteristics.....	8
<b>Detailed Description</b> .....	<b>11</b>
Overview.....	11
Functional Block Diagram.....	11
Feature Description.....	11
<b>Application and Implementation</b> .....	<b>13</b>
Application Information .....	13
Typical Application.....	13
<b>Layout</b> .....	<b>15</b>
Layout Guideline.....	15
Layout Example.....	15
<b>Tape and Reel Information</b> .....	<b>16</b>
<b>Package Outline Dimensions</b> .....	<b>18</b>
SOT23-5.....	18
SOT89-3.....	19
SOT223-3.....	20
<b>Order Information</b> .....	<b>21</b>
<b>IMPORTANT NOTICE AND DISCLAIMER</b> .....	<b>22</b>

---

**40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout  
Linear Regulator****Product Family Table**


Order Number	Output Voltage (V)	Package
TPL803133-S5TR	3.3 V	SOT23-5
TPL803150-S5TR	5.0 V	SOT23-5
TPL803133-89TR	3.3 V	SOT89-3
TPL803150-89TR	5.0 V	SOT89-3
TPL803133-ST4R-S	3.3 V	SOT223-3
TPL803150-ST4R-S	5.0 V	SOT223-3

**Revision History**

Date	Revision	Notes
2023-06-01	Rev.P.0	Preliminary Datasheet.
2024-02-05	Rev.A.0	Initial Released.
2024-09-30	Rev.A.1	1 Tightened the upper limit of output accuracy. 2 Added upper and lower limits of $V_{DO}$ , $I_Q$ , $I_{SD}$ and $I_{CL}$ . 3 Corrected block diagram. (Corrected the source connection of power mos and the connection of $V_{ref}$ ) 4 Corrected Tape and Reel Information. (Corrected the W1 size of SOT89-3)

# 40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout Linear Regulator

## Pin Configuration and Functions

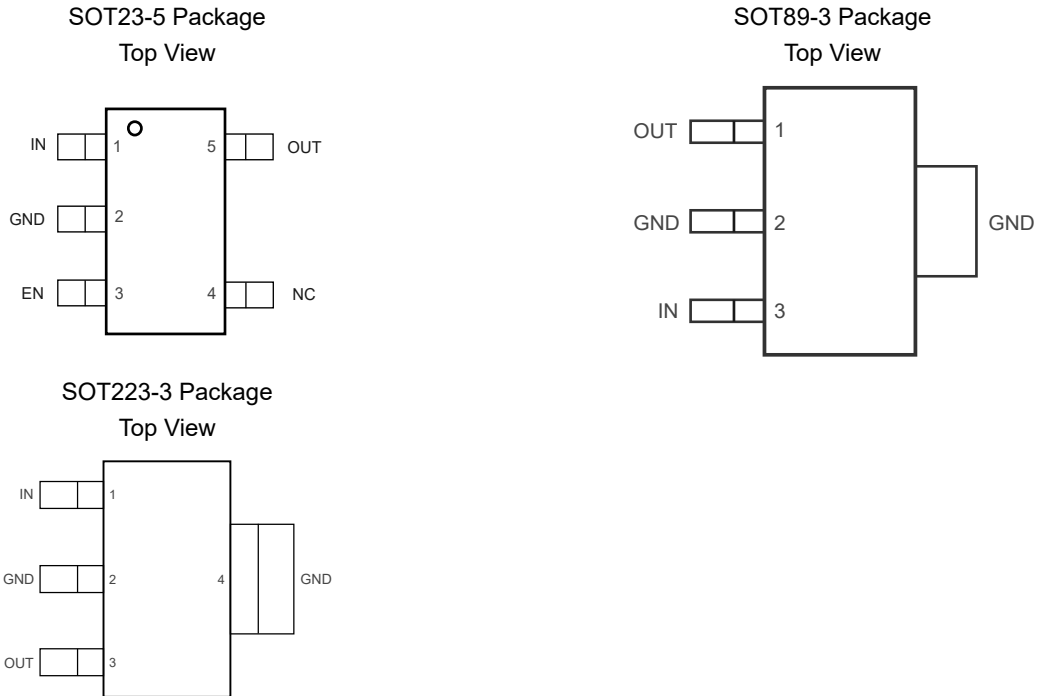

**Table 1. Pin Functions: TPL8031**

Pin Number			Pin Name	I/O	Description
SOT23-5	SOT89-3	SOT223-3			
3	–	–	EN	I	Regulator enable pin. Drive EN high to turn on the regulator; drive EN low to turn off the regulator.
2	2	2	GND	–	Ground reference pin. Connect the GND pin to the PCB ground plane directly.
1	3	1	IN	I	Input voltage pin.
4	–	–	NC	–	No connection.
5	1	3	OUT	O	Regulated output voltage pin.

## 40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout Linear Regulator

### Specifications

#### Absolute Maximum Ratings

Parameter		Min	Max	Unit
EN, IN		-0.3	45	V
OUT		-0.3	6	V
T <sub>J</sub>	Junction Temperature Range	-40	150	°C
T <sub>STG</sub>	Storage Temperature Range	-65	150	°C
T <sub>L</sub>	Lead Temperature (Soldering 10 sec)		260	°C

- (1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.  
 (2) All voltage values are with respect to GND.  
 (3) Not subject to production test, specified by design.

#### ESD, Electrostatic Discharge Protection

Symbol	Parameter	Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±2	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 <sup>(2)</sup>	±1	kV

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.  
 (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

#### Recommended Operating Conditions

Parameter		Min	Max	Unit
IN		3	40	V
EN (SOT23-5 only)		0	V <sub>IN</sub>	V
OUT		0	5	V
C <sub>OUT</sub> <sup>(1)(2)</sup>	Output Capacitor Requirements	1	200	μF
ESR <sup>(2)</sup>	Output Capacitor ESR Requirements	0.001	5	Ω
T <sub>A</sub>	Ambient Temperature Range	-40	125	°C

- (1) The minimum output capacitance requirement is applicable for a worst-case capacitance tolerance of 30%.  
 (2) Not subject to production test, specified by design.

#### Thermal Information

Package Type	θ <sub>JA</sub>	θ <sub>Jc</sub>	Unit
SOT23-5	89.1	52.0	°C/W
SOT89-3	49.8	42.6	°C/W
SOT223-3	65.0	60.0	°C/W

## 40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout Linear Regulator

### Electrical Characteristics

All test conditions:  $V_{IN} = V_{OUT(NOM)} + 2\text{ V}$ ,  $V_{EN} = 2\text{ V}$ ,  $C_{IN} = C_{OUT} = 10\text{ }\mu\text{F}$ ,  $I_{OUT} = 0.1\text{ mA}$ .  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
<b>Supply Input Voltage and Current</b>						
$V_{IN}$	Input Supply Voltage Range <sup>(1)</sup>		$V_{IN, MIN}$		40	V
UVLO	$V_{IN}$ Under-Voltage Lockout Threshold	$V_{IN}$ rising, $V_{EN} = 2\text{ V}$ , $I_{OUT} = 200\text{ mA}$		2.65	2.8	V
	Hysteresis			200		mV
$I_{SD}$	Shutdown Current	$V_{EN} = 0\text{ V}$ , $V_{IN} = 13.5\text{ V}$		0.4	2	$\mu\text{A}$
$I_Q$	Quiescent Current	$I_{OUT} = 0\text{ mA}$ , $V_{IN} = 13.5\text{ V}$		3	5.5	$\mu\text{A}$
		$I_{OUT} = 0.1\text{ mA}$ , $V_{IN} = 13.5\text{ V}$		4	6.5	$\mu\text{A}$
<b>Enable Input Voltage and Current</b>						
$V_{IH, EN}$	EN Logic Input High (Enable)		1.4		$V_{IN}$	V
$V_{IL, EN}$	EN Logic Input Low (Disable)		0		0.7	V
$I_{EN}$	EN Pin Leakage Current	$V_{EN} = 2\text{ V to }40\text{ V}$	-200		200	nA
<b>Regulated Output Voltage and Current</b>						
$V_{OUT}$	Output Accuracy	$V_{IN} = 6\text{ V to }40\text{ V}$ , $I_{OUT} = 1\text{ mA to }300\text{ mA}$	-2%		2%	
$\Delta V_{OUT}$	Line Regulation	$V_{IN} = 6\text{ V to }40\text{ V}$ , $I_{OUT} = 10\text{ mA}$		0.1		mV
	Load Regulation	$I_{OUT} = 1\text{ mA to }300\text{ mA}$		5		mV
$V_{DO}$	Dropout Voltage <sup>(2)</sup>	$I_{OUT} = 100\text{ mA}$ , $V_{OUT} = 3.3\text{ V}$		280	450	mV
		$I_{OUT} = 200\text{ mA}$ , $V_{OUT} = 3.3\text{ V}$		580	900	mV
		$I_{OUT} = 100\text{ mA}$ , $V_{OUT} = 5\text{ V}$		220	360	mV
		$I_{OUT} = 200\text{ mA}$ , $V_{OUT} = 5\text{ V}$		440	720	mV
$I_{OUT}$	Output Current Range	$V_{OUT}$ in regulation	0		300	mA
$I_{CL}$	Output Current Limit	$V_{OUT}$ is forced to $0.9 \cdot V_{OUT(NOM)}$	320	500	900	mA
$t_{SU}$	Start-Up Time <sup>(3)</sup>	From $EN \geq V_{IH}$ , EN to $OUT \geq 95\%$ of $V_{OUT(NOM)}$		4		ms
PSRR	Power Supply Rejection Ratio <sup>(3)</sup>	$I_{OUT} = 10\text{ mA}$ , $f = 1\text{ kHz}$		65		dB
		$I_{OUT} = 10\text{ mA}$ , $f = 1\text{ MHz}$		40		dB
$V_N$	Output Noise <sup>(3)</sup>	$V_{OUT} = 5\text{ V}$ , $I_{OUT} = 10\text{ mA}$ , BW = 10 Hz to 100 kHz		210		$\mu\text{VRMS}$
<b>Temperature Range</b>						
$T_{SD}$	Thermal Shutdown Threshold			175		$^\circ\text{C}$
	Thermal Shutdown Hysteresis			20		$^\circ\text{C}$

(1)  $V_{IN, MIN} = 3\text{ V}$  or  $V_{OUT(NOM)} + 1\text{ V}$ , whichever is greater.

(2) Dropout voltage is the minimum input-to-output voltage differential needed to maintain regulation at a specified output current. Dropout voltage is measured when the output voltage has dropped 100 mV from the nominal value. In dropout, the output voltage will be equal to  $(V_{IN} - V_{DO})$ .

---


**40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout  
Linear Regulator**

(3) Not test during production.

# 40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout Linear Regulator


## Typical Performance Characteristics

All test conditions:  $V_{IN} = V_{OUT(NOM)} + 2\text{ V}$ ,  $V_{EN} = 2\text{ V}$ ,  $C_{IN} = C_{OUT} = 10\text{ }\mu\text{F}$ ,  $I_{OUT} = 0.1\text{ mA}$ .  $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ , unless otherwise noted.

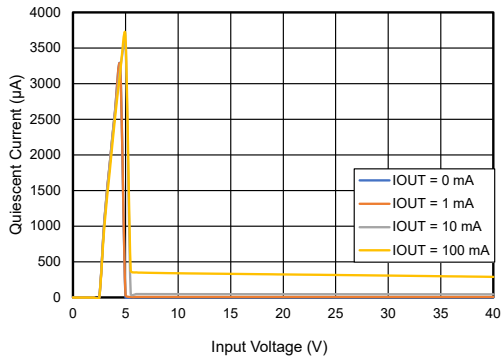


$V_{OUT} = 5\text{ V}$

Figure 1. Quiescent Current vs Input Voltage

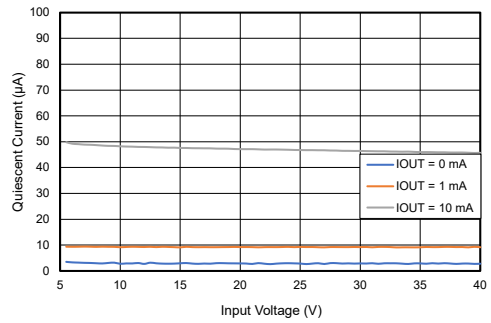


$V_{OUT} = 5\text{ V}$

Figure 2. Quiescent Current vs Input Voltage

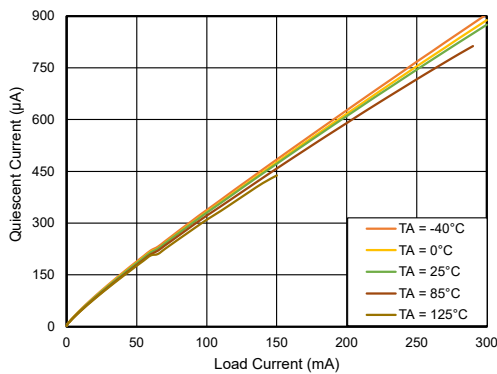



$V_{OUT} = 5\text{ V}$

Figure 3. Quiescent Current vs Load Current

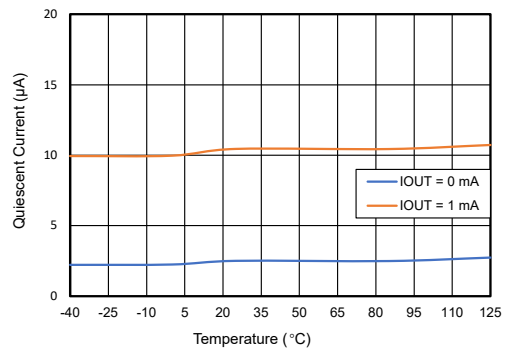

$V_{OUT} = 5\text{ V}$

Figure 4. Quiescent Current vs Ambient Temperature

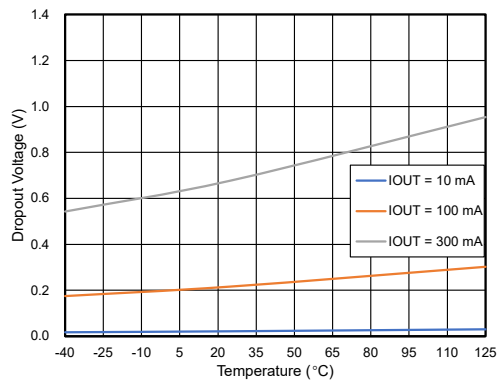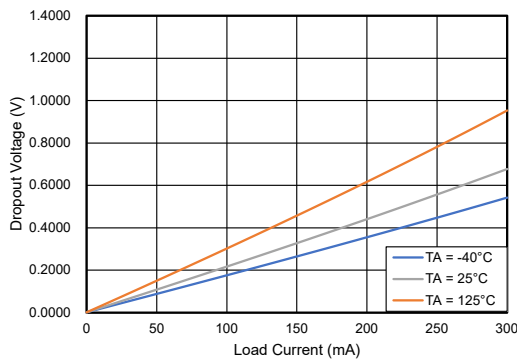




# 40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout Linear Regulator


$V_{OUT} = 5\text{ V}$

**Figure 5. Dropout Voltage vs Load Current**

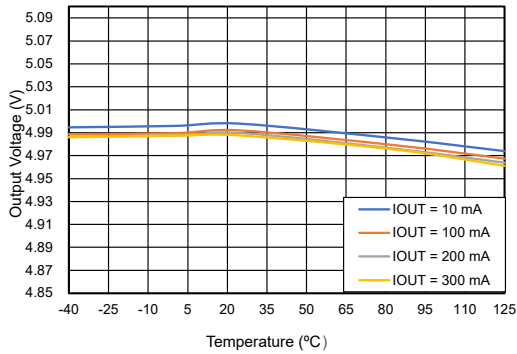


$V_{OUT} = 5\text{ V}$

**Figure 7. Output Voltage vs Ambient Temperature**

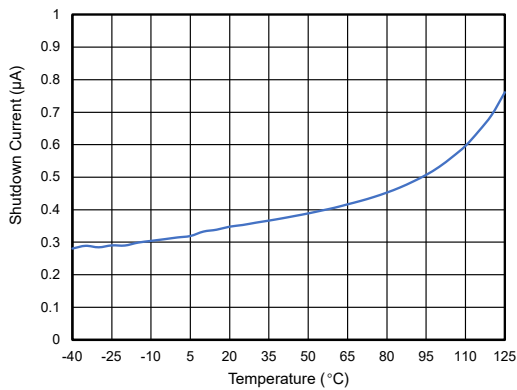

$V_{EN} = 0$

**Figure 9. Shutdown Current vs Ambient Temperature**

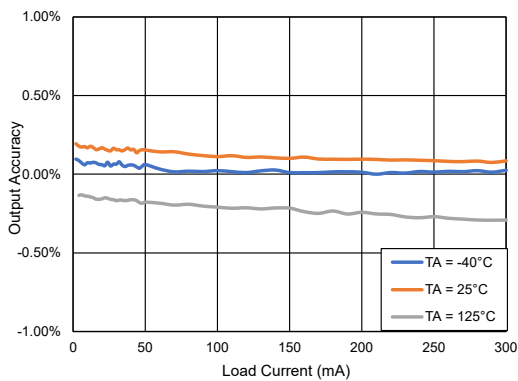


$V_{OUT} = 5\text{ V}$

**Figure 11. Load Regulation**


$V_{OUT} = 5\text{ V}$

**Figure 6. Dropout Voltage vs Ambient Temperature**

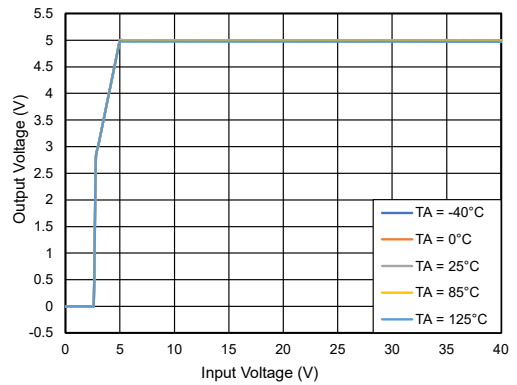


$V_{OUT} = 5\text{ V}, I_{OUT} = 1\text{ mA}$

**Figure 8. Output Voltage vs Input Voltage**

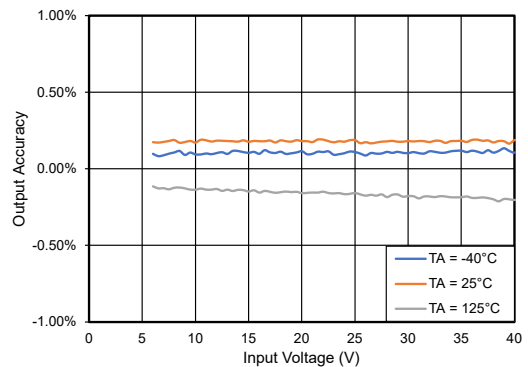

$V_{OUT} = 5\text{ V}$


**Figure 10. Line Regulation**

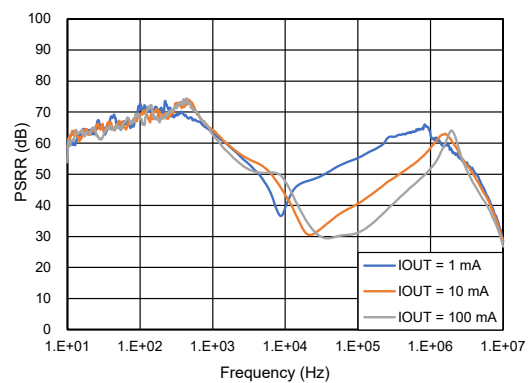

$V_{OUT} = 5\text{ V}$

**Figure 12. PSRR**

40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout Linear Regulator

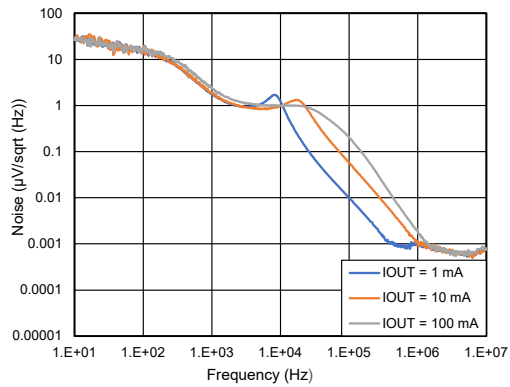

$V_{OUT} = 5\text{ V}$

Figure 13. Noise



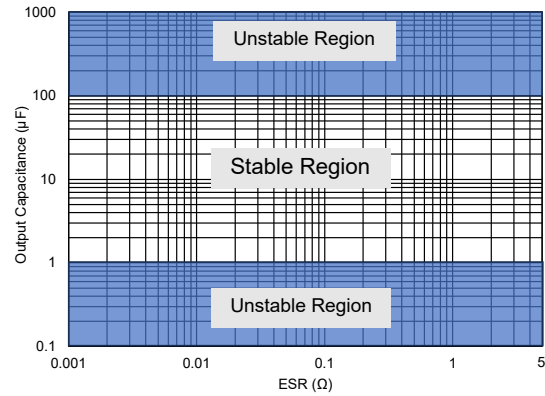


Figure 14. Output Capacitance vs ESR stability

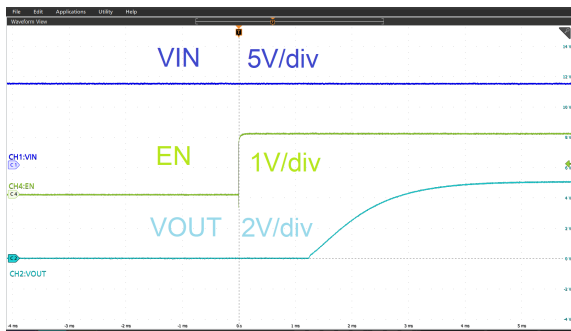


$C_{OUT} = 1\ \mu\text{F}$ ,  $V_{OUT} = 0\text{ V to } 5\text{ V}$

Figure 15. Startup Waveform

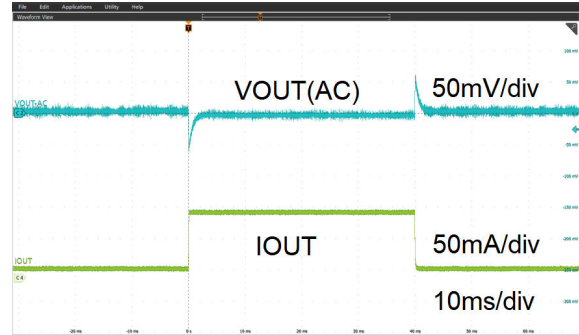

$C_{OUT} = 1\ \mu\text{F}$ ,  $I_{OUT} = 10\text{ mA to } 100\text{ mA in } 5\ \mu\text{s}$

Figure 16. Load Transient

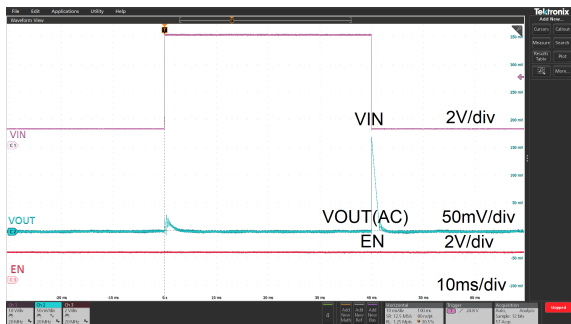

$C_{OUT} = 1\ \mu\text{F}$ ,  $V_{IN} = 6\text{ V to } 40\text{ V in } 30\ \mu\text{s}$

Figure 17. Line Transient

# 40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout Linear Regulator

## Detailed Description

### Overview

The TPL8031 series supports the operating range from 3 V to 40 V (45-V maximum transient voltage).

The TPL8031 products are 3- $\mu$ A ultra-low quiescent low dropout voltage linear regulators with 300-mA maximum output current capability.

With the above features, the TPL8031 products are the optimal solutions for powering handheld devices with battery power supply, pos and power tools, and wireless and IoT modules.

The TPL8031 series provides fixed 5-V and 3.3-V output voltage options. The TPL8031 supports a wide range of output capacitors from 1  $\mu$ F to 200  $\mu$ F with an ESR range from 0.001  $\Omega$  to 5  $\Omega$ . Also, the TPL8031 series integrates over-current protection and over-temperature protection.

### Functional Block Diagram

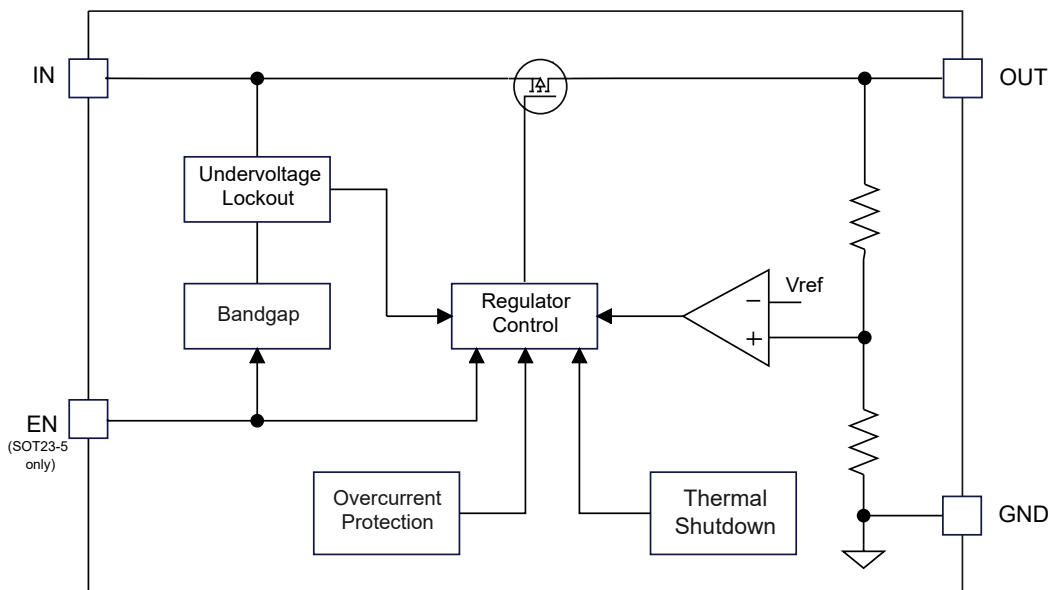


Figure 18. Functional Block Diagram

### Feature Description

#### Enable (EN) (SOT23-5 only)

The enable pin (EN) is active high. Connect this pin to the GPIO of an external processor or digital logic control circuit to enable and disable the device. Or connect this pin to the IN pin for self-bias applications.

---

**40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout  
Linear Regulator****Under-Voltage Lockout (UVLO)**

The TPL8031 series uses an under-voltage lockout circuit to keep the output shut off until the internal circuitry operates properly. Refer to the Electrical Characteristics table for UVLO threshold and hysteresis.

**Regulated Output Voltage (OUT)**

The TPL8031 series is available in fixed voltage versions of 5 V and 3.3 V. When the input voltage is higher than  $V_{OUT(NOM)} + V_{DO}$ , the output pin is the regulated output based on the selected voltage version. When the input voltage falls below  $V_{OUT(NOM)} + V_{DO}$ , the output pin tracks the input voltage minus the dropout voltage based on the load current.

**Over-Current Protection**

The TPL8031 series integrates an internal current limit that helps to protect the regulator during fault conditions, e.g., the output is shorted to ground, or the output is forced below  $V_{OUT(NOM)}$ . The output voltage is not regulated when the device is in current limit and  $V_{OUT} = I_{CL} \times R_{LOAD}$ .

**Over-Temperature Protection**

The over-temperature protection starts to work when the junction temperature exceeds the thermal shutdown (TSD) threshold, which turns off the regulator immediately. When the device cools down and the junction temperature falls below the thermal shutdown threshold minus thermal shutdown hysteresis, the regulator turns on again. The junction temperature range should be limited according to the Recommended Operating Conditions table, continuously operating above the junction temperature range will reduce the device lifetime.

# 40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout Linear Regulator

## Application and Implementation

**Note**


Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### Application Information

The TPL8031 series products are 40-V 3- $\mu$ A ultra-low quiescent low dropout voltage linear regulators with 300-mA maximum output current capability. The following application schematic shows a typical usage of the TPL8031 series.

### Typical Application

Figure 19 shows the typical application schematic of the TPL8031 series.

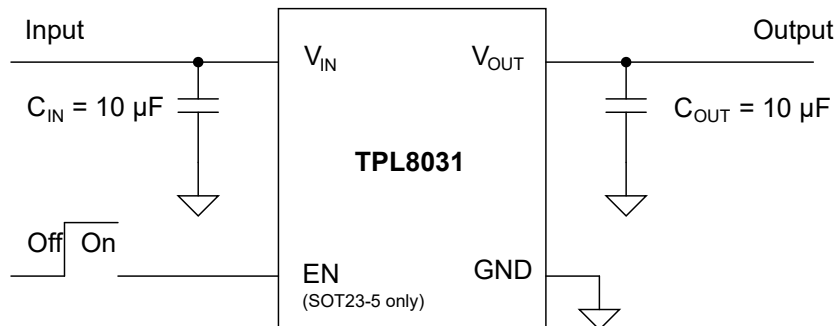

**Figure 19. Typical Application Circuit**

#### Input Capacitor and Output Capacitor

3PEAK recommends adding a 10- $\mu$ F or greater capacitor with a 0.1- $\mu$ F bypass capacitor in parallel at the IN pin to keep the input voltage stable. The voltage rating of the capacitors must be greater than the maximum input voltage.

To ensure loop stability, the TPL8031 series requires an output capacitor of 1  $\mu$ F to 200  $\mu$ F with an ESR range from 0.001  $\Omega$  to 5  $\Omega$ . 3PEAK recommends selecting an X7R type 10- $\mu$ F ceramic capacitor with low ESR over temperature.

Both input and output capacitors must be placed as close to the device pins as possible.

#### Power Dissipation and Thermal Consideration

During normal operation, the LDO junction temperature should meet the requirement in the [Recommended Operating Conditions](#) table. Use the below equations to calculate the power dissipation and estimate the junction temperature.

The power dissipation can be calculated using the [Equation 1](#).

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT} + V_{IN} \times I_{GND} \quad (1)$$

---

**40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout  
Linear Regulator**

The junction temperature can be estimated using [Equation 2](#).  $\theta_{JA}$  is the junction-to-ambient thermal resistance.

$$T_J = T_A + P_D \times \theta_{JA} \quad (2)$$

## 40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout Linear Regulator

### Layout

#### Layout Guideline

- Both input and output capacitors must be placed to the device pins as close as possible, and the vias between capacitors and device power pins must be avoided.
- It is recommended to bypass the input pin to ground with a 0.1- $\mu$ F bypass capacitor. The loop area formed by the bypass capacitor connection, the IN pin, and the GND pin of the system must be as small as possible.
- It is recommended to use wide and thick copper to minimize  $I \times R$  drop and heat dissipation.

#### Layout Example

The following figures show a layout example of TPL8031.

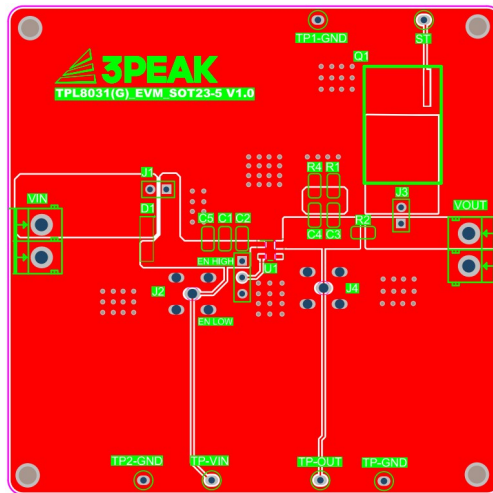


Figure 20. Layout Example (Top Layer)



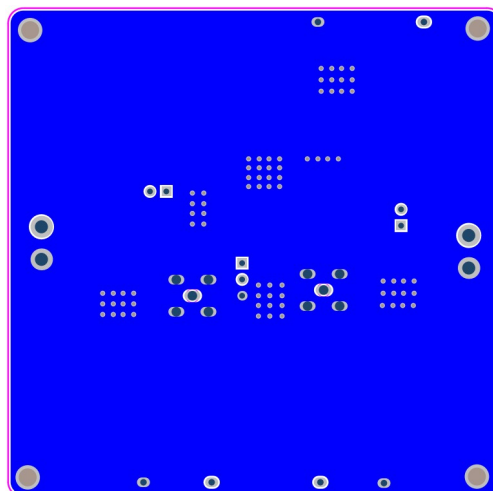


Figure 21. Layout Example (Bottom Layer)

Tape and Reel Information

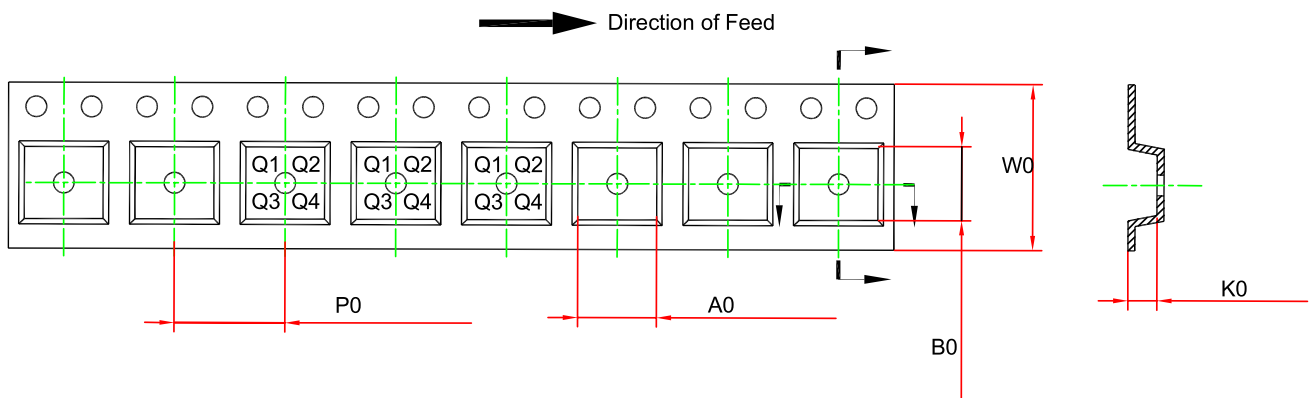

Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPL803133-S5TR	SOT23-5	179	12	3.3	3.25	1.4	4	8	Q3
TPL803150-S5TR	SOT23-5	179	12	3.3	3.25	1.4	4	8	Q3

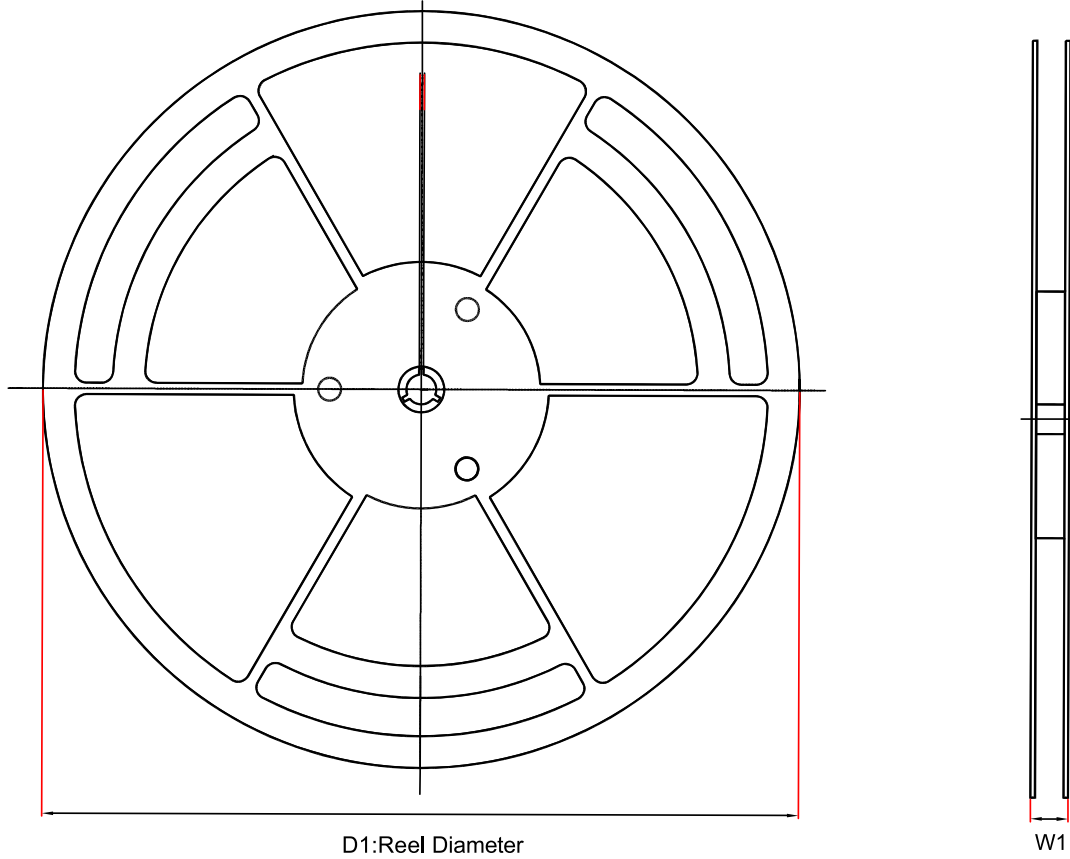

---


**40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout  
Linear Regulator**

Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPL803133-89 TR	SOT89-3	330	17.6	4.8	4.4	1.8	8	12	Q3
TPL803150-89 TR	SOT89-3	330	17.6	4.8	4.4	1.8	8	12	Q3
TPL803133- ST4R-S	SOT223-3	330	16.8	7.05	7.4	1.9	8	12.15	Q3
TPL803150- ST4R-S	SOT223-3	330	16.8	7.05	7.4	1.9	8	12.15	Q3

40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout  
Linear Regulator

Package Outline Dimensions

SOT23-5



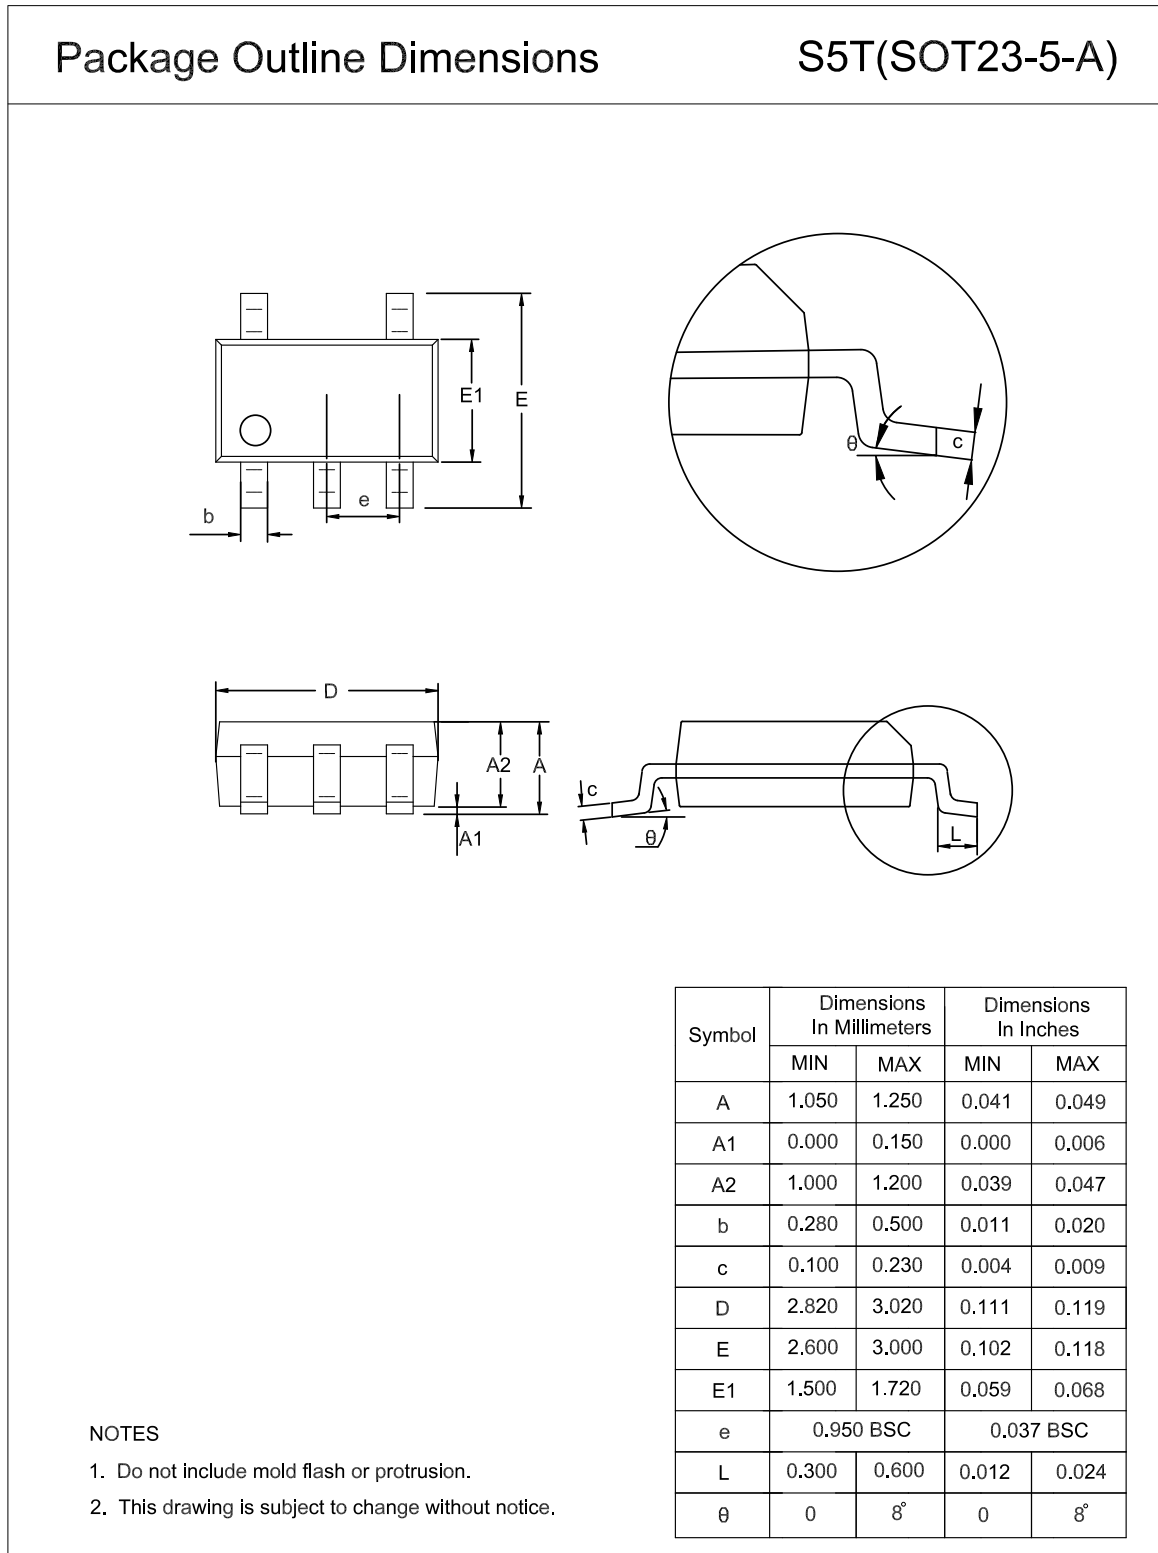


40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout Linear Regulator

SOT89-3




Package Outline Dimensions

89T(SOT89-3-A)



SECTION A-A




SECTION B-B



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A2	1.400	1.600	0.055	0.063
a	0.430	0.560	0.017	0.022
b	0.350	0.470	0.014	0.019
c	0.350	0.450	0.014	0.018
D	4.400	4.600	0.173	0.181
D1	1.600	1.830	0.063	0.072
E	3.950	4.250	0.156	0.167
E1	2.400	2.600	0.094	0.102
e	1.500 BSC		0.059 BSC	
D2	1.600	1.900	0.063	0.075
E2	2.700	3.100	0.106	0.122
L	0.820	1.200	0.032	0.047

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

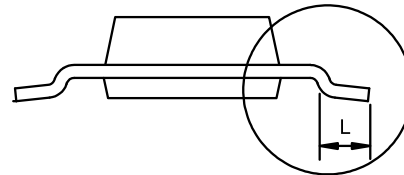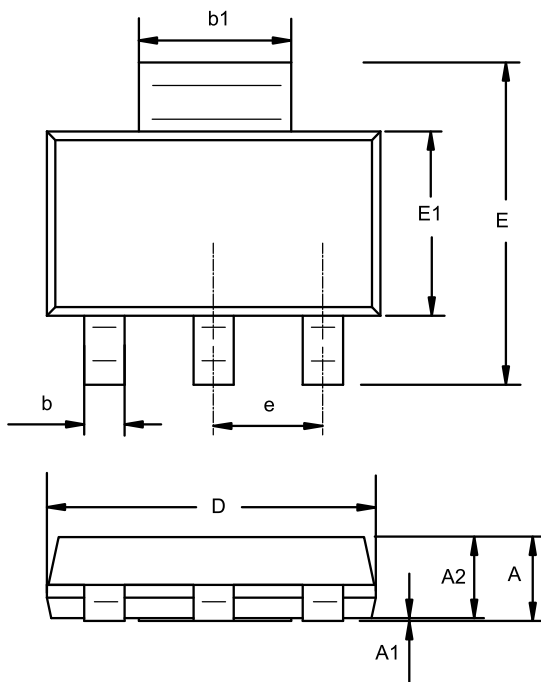**40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout  
Linear Regulator**
**SOT223-3**
**Package Outline Dimensions**
**ST4(SOT223-3-A)**


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.500	1.800	0.059	0.071
A1	0.020	0.100	0.001	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.840	0.026	0.033
b1	2.900	3.100	0.114	0.122
c	0.230	0.350	0.009	0.014
D	6.300	6.700	0.248	0.264
E	6.700	7.300	0.264	0.287
E1	3.300	3.700	0.130	0.146
e	2.300 BSC		0.091 BSC	
L	0.750	1.150	0.030	0.045
θ	0	10°	0	10°

**NOTES**

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

---

**40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout Linear Regulator****Order Information**

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPL803133-S5TR	-40 to 125°C	SOT23-5	LDC	MSL3	3,000	Green
TPL803150-S5TR	-40 to 125°C	SOT23-5	LDD	MSL3	3,000	Green
TPL803133-89TR	-40 to 125°C	SOT89-3	LDC	MSL3	4,000	Green
TPL803150-89TR	-40 to 125°C	SOT89-3	LDD	MSL3	4,000	Green
TPL803133-ST4R-S	-40 to 125°C	SOT223-3	LDC	MSL3	4,000	Green
TPL803150-ST4R-S	-40 to 125°C	SOT223-3	LDD	MSL3	4,000	Green

**Green:** 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

---

**40-V 300-mA Wide-Input Ultra-Low Quiescent Current Low-Dropout  
Linear Regulator****IMPORTANT NOTICE AND DISCLAIMER**

**Copyright**© 3PEAK 2012-2024. All rights reserved.

**Trademarks.** Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

**Performance Information.** Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

**Disclaimer.** 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.