

## Features

- Input Voltage Range: 2.4 V to 5.5 V
- Output Voltage Options:
  - Fixed Voltage: 1.2 V, 1.5 V, 1.8 V, 2.5 V, 2.8 V, 3 V, 3.3 V
  - Adjustable Voltage: 0.8 V to 5 V
- High Output Accuracy:
  - $\pm 1\%$  Typical Under Room Temperature
  - $\pm 2\%$  Through Operating Conditions
- Maximum Output Current: 300 mA
- Low Dropout Voltage: 200 mV at 300 mA
- Low Quiescent Current and Shutdown Current
- Foldback Current Limit and Thermal Protection
- Stable with 2.2- $\mu$ F Ceramic Capacitor
- Inrush Input Current Limitation During Start-up
- Thermal Shutdown Protection
- Junction Temperature Range:  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- Package Options: SOT23-5, SOT353-5 (SC70-5), DFN1 $\times$ 1-4

## Applications

- Handheld Devices with Battery Power Supply
- POS
- Video Surveillance
- Wireless and IoT modules

## Description

The TPL730 series is a high-performance and low-dropout linear regulator. The TPL730 series supports a maximum 300-mA output current with a low-quiescent current and high PSRR. The TPL730 series of products is stable with ceramic output capacitors from 2.2  $\mu$ F to 10  $\mu$ F.

The TPL730 series of products has a high PSRR with 60 dB at 1 kHz. This feature makes the TPL730 series very suitable for power-sensitive applications with high noise from the previous stage power supply. A quiescent current of as low as 49  $\mu$ A and an only 20-nA shutdown current make the TPL730 series an ideal choice for portable devices with a battery power supply. The current limit foldback and thermal overload protection circuits improve reliability under heavy load conditions.

The TPL730 series provides several output voltage version options including the fixed version and the adjustable version with  $\pm 2\%$  output voltage accuracy over operating conditions. The TPL730 series is guaranteed over the junction temperature range from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

## Typical Application Circuit

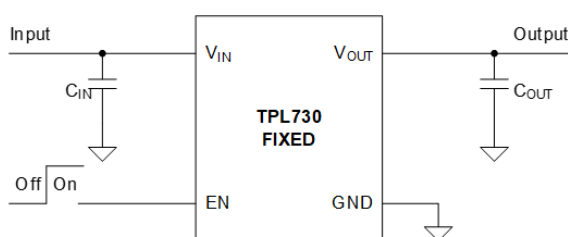


Figure 1. TPL730 Fixed Output Voltage

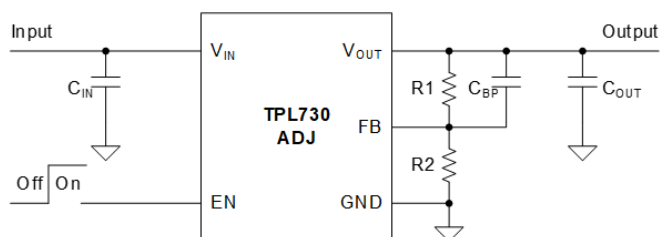


Figure 2. TPL730 Adjustable Output Voltage

## Table of Contents

|                                              |           |
|----------------------------------------------|-----------|
| <b>Features</b> .....                        | <b>1</b>  |
| <b>Applications</b> .....                    | <b>1</b>  |
| <b>Description</b> .....                     | <b>1</b>  |
| <b>Typical Application Circuit</b> .....     | <b>1</b>  |
| <b>Product Family Table</b> .....            | <b>3</b>  |
| <b>Revision History</b> .....                | <b>4</b>  |
| <b>Pin Configuration and Functions</b> ..... | <b>5</b>  |
| <b>Specifications</b> .....                  | <b>6</b>  |
| Absolute Maximum Ratings .....               | 6         |
| ESD, Electrostatic Discharge Protection..... | 6         |
| Recommended Operating Conditions.....        | 6         |
| Thermal Information.....                     | 7         |
| Electrical Characteristics.....              | 8         |
| Typical Performance Characteristics.....     | 10        |
| <b>Detailed Description</b> .....            | <b>12</b> |
| Overview.....                                | 12        |
| Functional Block Diagram.....                | 12        |
| Feature Description.....                     | 12        |
| <b>Application and Implementation</b> .....  | <b>14</b> |
| Application Information .....                | 14        |
| Typical Application.....                     | 14        |
| <b>Layout</b> .....                          | <b>16</b> |
| Layout Guideline.....                        | 16        |
| <b>Tape and Reel Information</b> .....       | <b>17</b> |
| <b>Package Outline Dimensions</b> .....      | <b>19</b> |
| SOT23-5.....                                 | 19        |
| SOT353-5 (SC70-5).....                       | 20        |
| DFN1×1-4.....                                | 21        |
| <b>Order Information</b> .....               | <b>22</b> |
| <b>IMPORTANT NOTICE AND DISCLAIMER</b> ..... | <b>24</b> |




**Product Family Table**

| Order Number  | Output Voltage (V)       | Package           |
|---------------|--------------------------|-------------------|
| TPL730ADJ-5TR | Adjustable (0.8 V ~ 5 V) | SOT23-5           |
| TPL730F12-5TR | Fixed 1.2 V              | SOT23-5           |
| TPL730F15-5TR | Fixed 1.5 V              | SOT23-5           |
| TPL730F18-5TR | Fixed 1.8 V              | SOT23-5           |
| TPL730F25-5TR | Fixed 2.5 V              | SOT23-5           |
| TPL730F28-5TR | Fixed 2.8 V              | SOT23-5           |
| TPL730F30-5TR | Fixed 3.0 V              | SOT23-5           |
| TPL730F33-5TR | Fixed 3.3 V              | SOT23-5           |
| TPL730ADJ-CR  | Adjustable (0.8 V ~ 5 V) | SOT353-5 (SC70-5) |
| TPL730F18-CR  | Fixed 1.8 V              | SOT353-5 (SC70-5) |
| TPL730F28-CR  | Fixed 2.8 V              | SOT353-5 (SC70-5) |
| TPL730F30-CR  | Fixed 3.0 V              | SOT353-5 (SC70-5) |
| TPL730F33-CR  | Fixed 3.3 V              | SOT353-5 (SC70-5) |
| TPL730F12-FR  | Fixed 1.2 V              | DFN1×1-4          |
| TPL730F15-FR  | Fixed 1.5 V              | DFN1×1-4          |
| TPL730F18-FR  | Fixed 1.8 V              | DFN1×1-4          |
| TPL730F25-FR  | Fixed 2.5 V              | DFN1×1-4          |
| TPL730F28-FR  | Fixed 2.8 V              | DFN1×1-4          |
| TPL730F30-FR  | Fixed 3.0 V              | DFN1×1-4          |
| TPL730F33-FR  | Fixed 3.3 V              | DFN1×1-4          |

## Revision History

| Date       | Revision  | Notes                                                                                                                                                                                                                               |
|------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2018-09-18 | Rev.Pre.0 | Preliminary version.                                                                                                                                                                                                                |
| 2018-11-26 | Rev.A.0   | Initial released version.                                                                                                                                                                                                           |
| 2019-02-11 | Rev.A.1   | 1. Added the SC70-5 package.<br>2. Added voltage options of 1.5 V, 2.7 V, and 2.9 V.<br>3. Added the link to Figure 11 and Figure 12.                                                                                               |
| 2020-08-15 | Rev.A.2   | 1. Changed the “Soft-start Limits Input Current Surge During Enable” to “Inrush Input Current Limitation During Start-up”.<br>2. Added the power dissipation limitation.<br>3. Added the description of “Short-Circuit Protection”. |
| 2021-03-09 | Rev.A.3   | 1. Corrected the typical value of the current limit in the Feature Description.<br>2. Added Tape and Reel Information.<br>3. Updated Junction Temperature Range.                                                                    |
| 2022-05-08 | Rev.A.4   | Corrected the test condition in the Electrical Characteristics table.                                                                                                                                                               |
| 2022-08-21 | Rev.A.5   | Corrected the pin number of the SC70-5 package.                                                                                                                                                                                     |
| 2024-10-10 | Rev.A.6   | 1. Removed voltage options of 2.7 V and 2.9 V.<br>2. Updated recommended $C_{BP}$ range for adjustable output version                                                                                                               |

## Pin Configuration and Functions

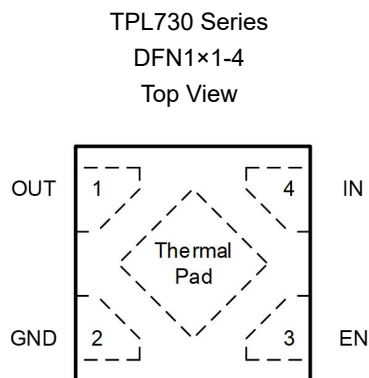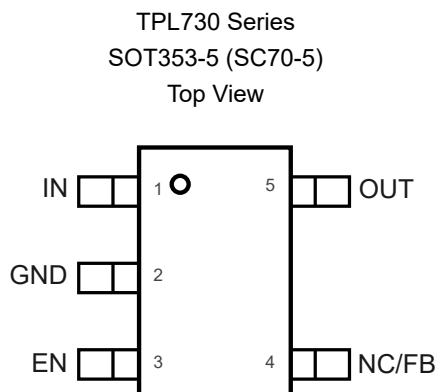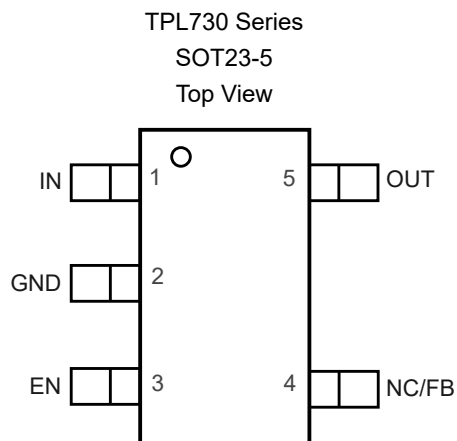

**Table 1. Pin Functions**

| Pin No. |                   |          | Name | I/O | Description                                                                                                                                                                                    |
|---------|-------------------|----------|------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SOT23-5 | SOT353-5 (SC70-5) | DFN1×1-4 |      |     |                                                                                                                                                                                                |
| 1       | 1                 | 4        | IN   | I   | The input voltage pin. Bypass IN to GND with a 1-μF or greater capacitor.                                                                                                                      |
| 5       | 5                 | 1        | OUT  | O   | The regulated output voltage pin. Bypass OUT to GND with a 2.2-μF or greater capacitor.                                                                                                        |
| 3       | 3                 | 3        | EN   | I   | The regulator enable pin. Drive EN high to turn on the regulator; drive EN low to turn off the regulator. For the automatic startup, connect EN to IN directly.                                |
| 2       | 2                 | 2        | GND  | -   | The ground reference pin. Connect the GND pin to the PCB ground plane directly.                                                                                                                |
| 4       | 4                 | -        | NC   | -   | Not connected.                                                                                                                                                                                 |
| 4       | 4                 | -        | FB   | I   | The output feedback pin (adjustable version only). Connect to a resistor divider to adjust the output voltage. And connect C <sub>BP</sub> with capacitance from 1nF 200nF between FB and OUT. |

(1) The thermal pad must be connected to the PCB ground plane to maximize the thermal performance.

## Specifications

### Absolute Maximum Ratings

| Parameter                         |                                            | Min  | Max | Unit |
|-----------------------------------|--------------------------------------------|------|-----|------|
| V <sub>IN</sub> , V <sub>EN</sub> | Input Voltage                              | -0.3 | 6   | V    |
| V <sub>OUT</sub>                  | Output Voltage                             | -0.3 | 6   | V    |
| V <sub>FB</sub>                   | Feedback Voltage (Adjustable Version only) | -0.3 | 6   | V    |
| T <sub>J</sub>                    | Maximum Operating Junction Temperature     | -40  | 150 | °C   |
| T <sub>STG</sub>                  | Storage Temperature Range                  | -65  | 150 | °C   |
| T <sub>L</sub>                    | Lead Temperature (Soldering, 10 sec)       |      | 260 | °C   |

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

(2) All voltage values are with respect to GND.

### ESD, Electrostatic Discharge Protection

| Symbol | Parameter                | Condition                             | Minimum Level | Unit |
|--------|--------------------------|---------------------------------------|---------------|------|
| HBM    | Human Body Model ESD     | ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup> | ±8            | kV   |
| CDM    | Charged Device Model ESD | ANSI/ESDA/JEDEC JS-002 <sup>(2)</sup> | ±2            | kV   |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### Recommended Operating Conditions

| Parameter        |                                               | Min | Max              | Unit |
|------------------|-----------------------------------------------|-----|------------------|------|
| V <sub>IN</sub>  | Input Voltage                                 | 2.4 | 5.5              | V    |
| V <sub>EN</sub>  | Enable Voltage                                | 0   | V <sub>IN</sub>  | V    |
| V <sub>OUT</sub> | Output Voltage                                | 0   | 5                | V    |
| V <sub>FB</sub>  | Feedback Voltage (Adjustable Version Only)    | 0   | V <sub>OUT</sub> | V    |
| I <sub>OUT</sub> | Output Current                                | 0   | 300              | mA   |
| P <sub>D</sub>   | Power Dissipation (SOT23-5 Package)           | 0   | 300              | mW   |
|                  | Power Dissipation (SOT353-5 (SC70-5) Package) | 0   | 300              | mW   |
|                  | Power Dissipation (DFN1×1-4 Package)          | 0   | 300              | mW   |
| C <sub>OUT</sub> | Output Capacitor                              | 2.2 | 10               | μF   |
| C <sub>BP</sub>  | Bypass Capacitor                              | 1   | 200              | nF   |
| T <sub>J</sub>   | Operating Junction Temperature Range          | -40 | 125              | °C   |

**Thermal Information**

| Package Type      | $\theta_{JA}$ | $\theta_{JC}$ | Unit |
|-------------------|---------------|---------------|------|
| SOT23-5           | 280           | 62            | °C/W |
| SOT353-5 (SC70-5) | 310           | 80            | °C/W |
| DFN1×1-4          | 210           | 110           | °C/W |

## Electrical Characteristics

All test conditions:  $V_{IN} = V_{OUT(NOM)} + 0.5\text{ V}$  or  $2.4\text{ V}$ , whichever is greater;  $C_{OUT} = 2.2\text{ }\mu\text{F}$ ,  $T_A = +25^\circ\text{C}$ , unless otherwise noted.

| Symbol                               | Parameter                                    | Conditions                                                                                  | Min   | Typ  | Max             | Unit |
|--------------------------------------|----------------------------------------------|---------------------------------------------------------------------------------------------|-------|------|-----------------|------|
| Supply Voltage and Current           |                                              |                                                                                             |       |      |                 |      |
| V <sub>IN</sub>                      | Input Voltage Range                          |                                                                                             | 2.4   |      | 5.5             | V    |
| I <sub>GND</sub>                     | Ground Pin Current                           | I <sub>OUT</sub> = 0 mA                                                                     |       | 49   |                 | μA   |
|                                      |                                              | I <sub>OUT</sub> = 100 mA                                                                   |       | 200  |                 | μA   |
| I <sub>SHDN</sub>                    | Shutdown Current                             | EN = GND                                                                                    |       | 20   |                 | nA   |
| UVLO                                 | V <sub>IN</sub> Under-Voltage Lock-out       | V <sub>IN</sub> Rising                                                                      |       | 1.9  |                 | V    |
|                                      |                                              | Hysteresis                                                                                  |       | 200  |                 | mV   |
| Enable Input Voltage and Current     |                                              |                                                                                             |       |      |                 |      |
| V <sub>IH</sub> (EN)                 | EN Logic-Input High Level (Enable)           |                                                                                             | 1.2   |      | V <sub>IN</sub> | V    |
| V <sub>IL</sub> (EN)                 | EN Logic-Input Low Level (Disable)           |                                                                                             | 0     |      | 0.4             | V    |
| I <sub>EN</sub>                      | EN Pin Leakage Current                       | EN = 5 V                                                                                    |       | 1    |                 | μA   |
| Regulated Output Voltage and Current |                                              |                                                                                             |       |      |                 |      |
| V <sub>OUT</sub>                     | Output Voltage Accuracy                      | T <sub>J</sub> = +25°C                                                                      |       | 1%   |                 |      |
|                                      |                                              | −40°C ≤ T <sub>J</sub> ≤ +125°C                                                             | −2%   |      | 2%              |      |
| V <sub>FB</sub>                      | Feedback Pin Voltage                         | ADJ Version Only                                                                            | 0.784 | 0.8  | 0.816           | V    |
| ΔV <sub>OUT</sub>                    | Line Regulation                              | V <sub>IN</sub> = 2.4 V or V <sub>OUT</sub> (NOM) + 0.5 V to 5.5 V, I <sub>OUT</sub> = 1 mA |       | 1    | 5               | mV   |
|                                      | Load Regulation                              | I <sub>OUT</sub> = 1 mA to 300 mA                                                           |       | 20   |                 | mV   |
| V <sub>DO</sub> <sup>(1)</sup>       | Dropout Voltage                              | V <sub>IN</sub> = 0.98 × V <sub>OUT</sub> (NOM),<br>I <sub>OUT</sub> = 100 mA               |       | 75   |                 | mV   |
|                                      |                                              | V <sub>IN</sub> = 0.98 × V <sub>OUT</sub> (NOM),<br>I <sub>OUT</sub> = 300 mA               |       | 200  | 250             | mV   |
| I <sub>OUT</sub>                     | Output Current                               | V <sub>OUT</sub> in Regulation                                                              | 0     |      | 300             | mA   |
| I <sub>CL</sub>                      | Output Current Limit                         | V <sub>OUT</sub> = 0.9 × V <sub>OUT</sub> (NOM)                                             | 350   | 1000 | 1400            | mA   |
| Regulated Output Voltage and Current |                                              |                                                                                             |       |      |                 |      |
| PSRR                                 | Power Supply Rejection Ratio (Fixed Version) | I <sub>OUT</sub> = 100 mA, f = 1 kHz                                                        |       | 60   |                 | dB   |
|                                      |                                              | I <sub>OUT</sub> = 100 mA, f = 100 kHz                                                      |       | 40   |                 | dB   |
|                                      |                                              | I <sub>OUT</sub> = 100 mA, f = 1 MHz                                                        |       | 40   |                 | dB   |
|                                      | Power Supply Rejection Ratio (ADJ Version)   | I <sub>OUT</sub> = 100 mA, f = 1 kHz,<br>C <sub>BP</sub> = 100 nF                           |       | 65   |                 | dB   |
|                                      |                                              | I <sub>OUT</sub> = 100 mA, f = 100 kHz,<br>C <sub>BP</sub> = 100 nF                         |       | 60   |                 | dB   |
|                                      |                                              | I <sub>OUT</sub> = 100 mA, f = 1 MHz,<br>C <sub>BP</sub> = 100 nF                           |       | 45   |                 | dB   |



**300-mA Output, High PSRR, Low-Dropout Linear Regulator**

| Symbol                   | Parameter                            | Conditions                                                                          | Min | Typ | Max | Unit          |
|--------------------------|--------------------------------------|-------------------------------------------------------------------------------------|-----|-----|-----|---------------|
| $V_N$                    | Output Noise Voltage (Fixed Version) | $I_{OUT} = 100\text{ mA}$ , BW = 100 Hz to 80 kHz                                   |     | 130 |     | $\mu V_{RMS}$ |
|                          | Output Noise Voltage (ADJ Version)   | $I_{OUT} = 100\text{ mA}$ , BW = 100 Hz to 80 kHz, $C_{BP} = 100\text{ nF}$         |     | 40  |     | $\mu V_{RMS}$ |
| $T_{STR}^{(2)}$          | Start-up Time (Fixed Version)        | $I_{OUT} = 300\text{ mA}$ , $C_{OUT} = 2.2\text{ }\mu F$                            |     | 150 |     | $\mu s$       |
|                          | Start-up Time (ADJ Version)          | $I_{OUT} = 300\text{ mA}$ , $C_{OUT} = 2.2\text{ }\mu F$ , $C_{BP} = 100\text{ nF}$ |     | 15  |     | ms            |
| <b>Temperature Range</b> |                                      |                                                                                     |     |     |     |               |
| $T_{SD}$                 | Thermal Shutdown Temperature         |                                                                                     |     | 170 |     | $^{\circ}C$   |
|                          | Thermal Shutdown Hysteresis          |                                                                                     |     | 30  |     | $^{\circ}C$   |

(1) Dropout voltage is the minimum input-to-output voltage differential needed to maintain regulation at a specified output current. In dropout, the output voltage will be equal to  $V_{IN} - V_{DROPOUT}$ .

(2) The start-up time from EN assertion to  $0.98 \times V_{OUT(NOM)}$ .

## Typical Performance Characteristics

All test conditions:  $V_{IN} = V_{OUT(NOM)} + 0.5\text{ V}$  or  $2.4\text{ V}$ , whichever is greater;  $C_{OUT} = 2.2\text{ }\mu\text{F}$ ,  $T_A = +25^\circ\text{C}$ , unless otherwise noted.

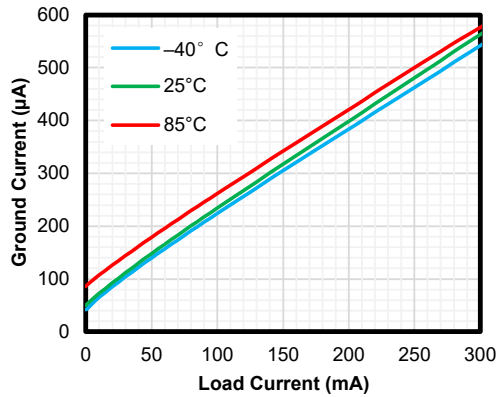


Figure 3. Quiescent Current vs. Output Current

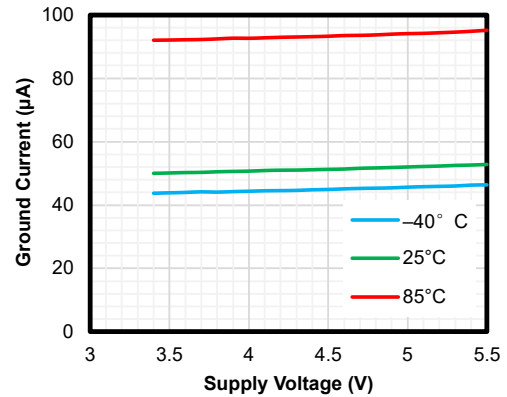


Figure 4. Quiescent Current vs. Input Voltage

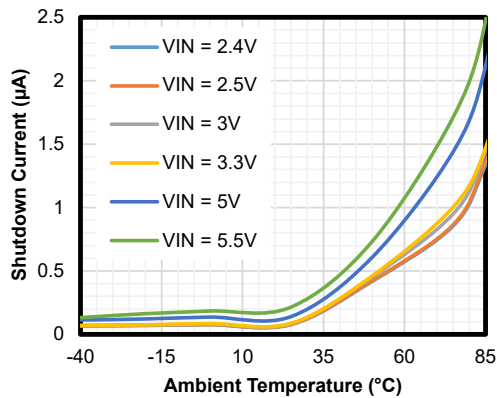


Figure 5. Shutdown Current vs. Ambient Temperature

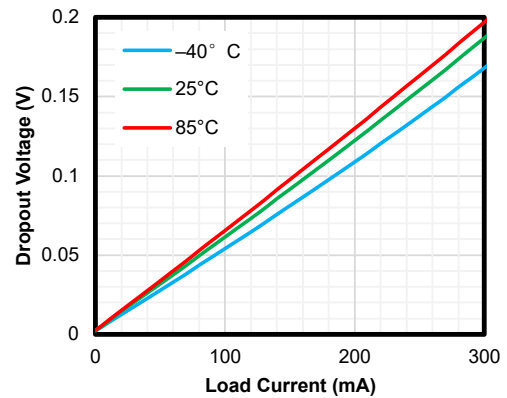


Figure 6. Dropout Voltage vs. Output Current

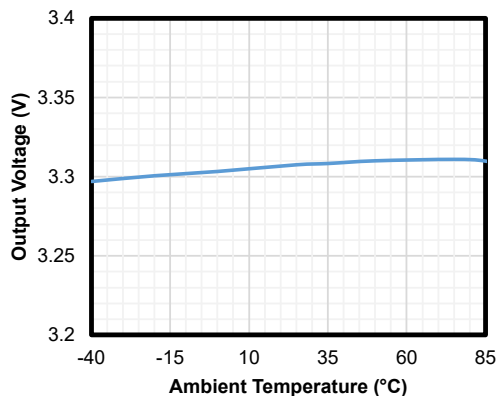


Figure 7. Output Accuracy vs. Ambient Temperature

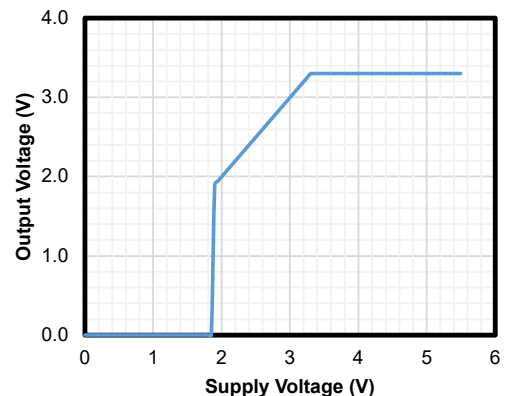
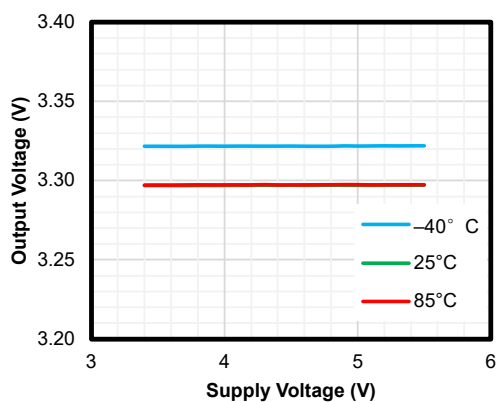
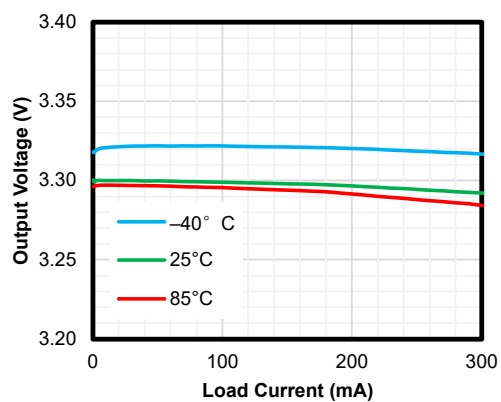
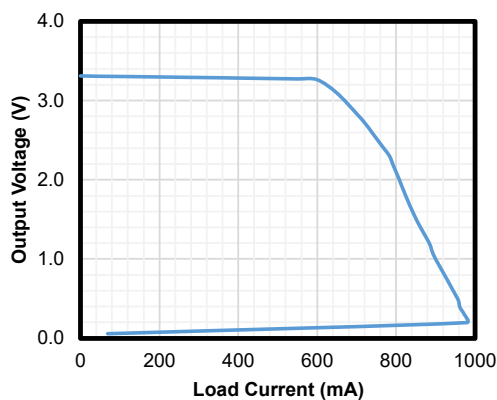
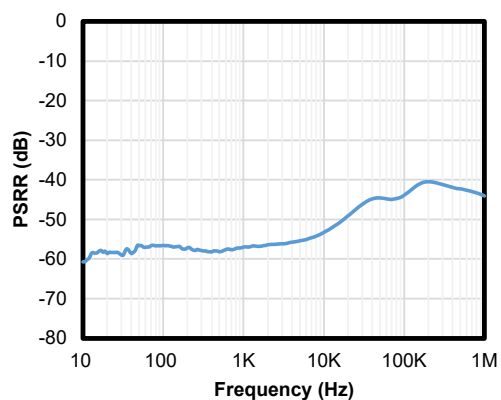


Figure 8. Output Voltage vs. Supply Voltage


**Figure 9. Line Regulation**

**Figure 10. Load Regulation**

**Figure 11. Foldback Current Limit**

**Figure 12. PSRR**


## Detailed Description

### Overview


The TPL730 series of devices is a 300-mA high PSRR, low-dropout linear regulator with a very low quiescent current. It operates from 2.4 V to 5.5 V and consumes a quiescent current of 49  $\mu\text{A}$  at no load and only 20 nA in shutdown mode.

The TPL730 series is available in fixed voltage versions of 1.2 V, 1.5 V, 1.8 V, 2.5 V, 2.8 V, 3 V, and 3.3 V, and adjustable voltage versions of 0.8 V to 5 V with  $\pm 2\%$  output voltage accuracy over operating conditions.

### Functional Block Diagram

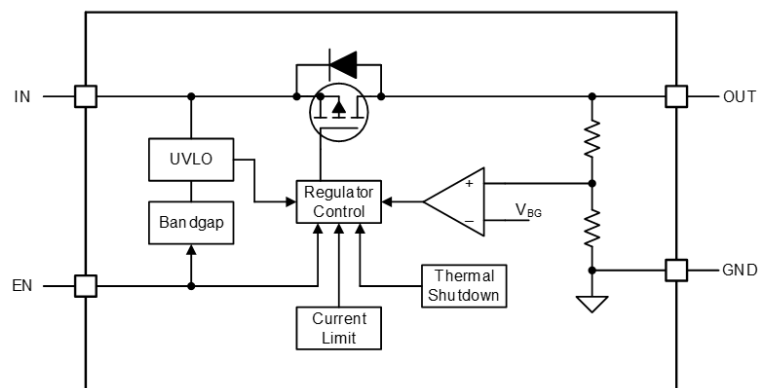

**Figure 13. TPL730 Series Fixed Output Version**

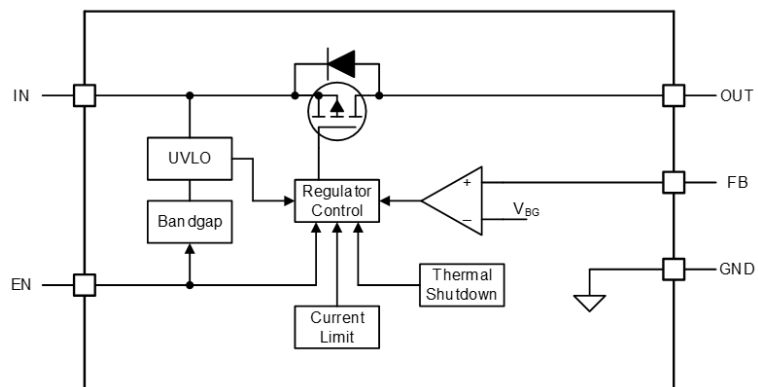

**Figure 14. TPL730 Series Adjustable Output Version**

## Feature Description

### Enable

The enable pin (EN) is active high. Connect this pin to the GPIO of an external processor or digital logic control circuit to enable and disable the device. Or connect this pin to the IN pin for self-bias applications.

---

**300-mA Output, High PSRR, Low-Dropout Linear Regulator**

---

**Under-Voltage Lockout (UVLO)**

The TPL730 series uses an under-voltage lockout circuit (UVLO = 1.9 V) to keep the output shut off until the internal circuitry operates properly.

**Regulated Output Voltage**

The TPL730 series is available in fixed voltage versions of 1.2 V, 1.5 V, 1.8 V, 2.5 V, 2.8 V, 3 V, and 3.3 V. When the input voltage is higher than  $V_{OUT(NOM)} + V_{DO}$  or 2.4 V, the output pin is the regulated output based on the selected voltage version. When the input voltage falls below  $V_{OUT(NOM)} + V_{DO}$  or 2.4 V, the output pin tracks the input voltage minus the dropout voltage based on the load current. When the input voltage drops below the UVLO threshold, the output keeps shut off.

**Adjustable Output Voltage**

The TPL730 series is also available in adjustable voltage versions of 0.8 V to 5 V by selecting suitable external resistor dividers. Use [Equation 1](#) to calculate the output voltage ( $V_{FB} = 0.8$  V). Selecting the resistor value of ( $R1 + R2$ ) between 10 k $\Omega$  and 100 k $\Omega$  is suggested.

$$V_{OUT} = V_{FB} \times \left(1 + \frac{R1}{R2}\right) \quad (1)$$

**Current Limit**

The TPL730 series integrates an internal foldback current limit that helps to protect the regulator during fault conditions. When the output is shorted, the LDO supplies a typical current of 1000 mA. The output voltage is not regulated when the device is in current limit and is  $V_{OUT} = I_{CL} \times R_{LOAD}$ .

**Short-Circuit Protection**

The TPL730 series integrates the short-circuit protection. When the output pin is shorted to ground or forced to a voltage below 0.2 V, the output current of the TPL730 series is limited to a typical value of 150 mA.

**Thermal Shutdown**

During normal operation, the LDO junction temperature should not exceed 125°C. When the junction temperature exceeds the thermal shutdown threshold, the LDO shuts down the output immediately. Until when the junction temperature falls below the thermal shutdown threshold minus thermal shutdown hysteresis, the output turns on again.

### Application and Implementation

#### Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### Application Information

The TPL730 series of devices is a 300-mA high PSRR, low-dropout linear regulator with a low quiescent current. The following application schematic shows a typical usage of the TPL730 series.

### Typical Application

Figure 15 and Figure 16 show the typical application schematic of the TPL730 series.

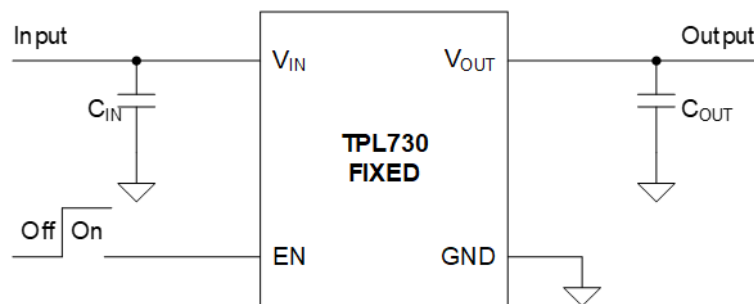


Figure 15. TPL730 Fixed Output Voltage

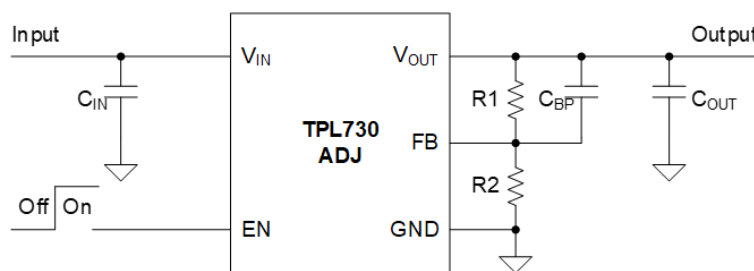


Figure 16. TPL730 Adjustable Output Voltage

#### Input Capacitor and Output Capacitor

3PEAK recommends adding a 1- $\mu$ F or greater capacitor with a 0.1- $\mu$ F capacitor in parallel at the IN pin to keep the input voltage stable. The voltage rating of the capacitors must be greater than the maximum input voltage.

To ensure loop stability, the TPL730 series requires an output capacitor with a minimum effective capacitance value of 2.2  $\mu$ F. 3PEAK recommends selecting an X5R- or X7R-type ceramic capacitor with low ESR over temperature.

The TPL730 adjustable output version requires a bypass capacitor  $C_{BP}$  with a capacitance value from 1nF to 200nF to ensure loop stability.

All capacitors must be placed as close to the pins of the device as possible.

---

**300-mA Output, High PSRR, Low-Dropout Linear Regulator****Power Dissipation**

During normal operation, the LDO junction temperature should not exceed 125°C. Use the below equations to calculate the power dissipation and estimate the junction temperature.

The power dissipation can be calculated using [Equation 2](#).

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT} + V_{IN} \times I_{GND} \quad (2)$$

The junction temperature can be estimated using [Equation 3](#).  $\theta_{JA}$  is the junction-to-ambient thermal resistance (See [Thermal Information](#)).

$$T_J = T_A + P_D \times \theta_{JA} \quad (3)$$


## Layout

### Layout Guideline

- Both input capacitors and output capacitors must be placed as close to the pins of the device as possible.
- It is recommended to bypass the input pin to ground with a 0.1- $\mu$ F bypass capacitor. The loop area formed by the bypass capacitor connection, the IN pin, and the GND pin of the system must be as small as possible.
- It is recommended to use wide trace lengths or thick copper weight to minimize  $I \times R$  drop and heat dissipation.



## Tape and Reel Information

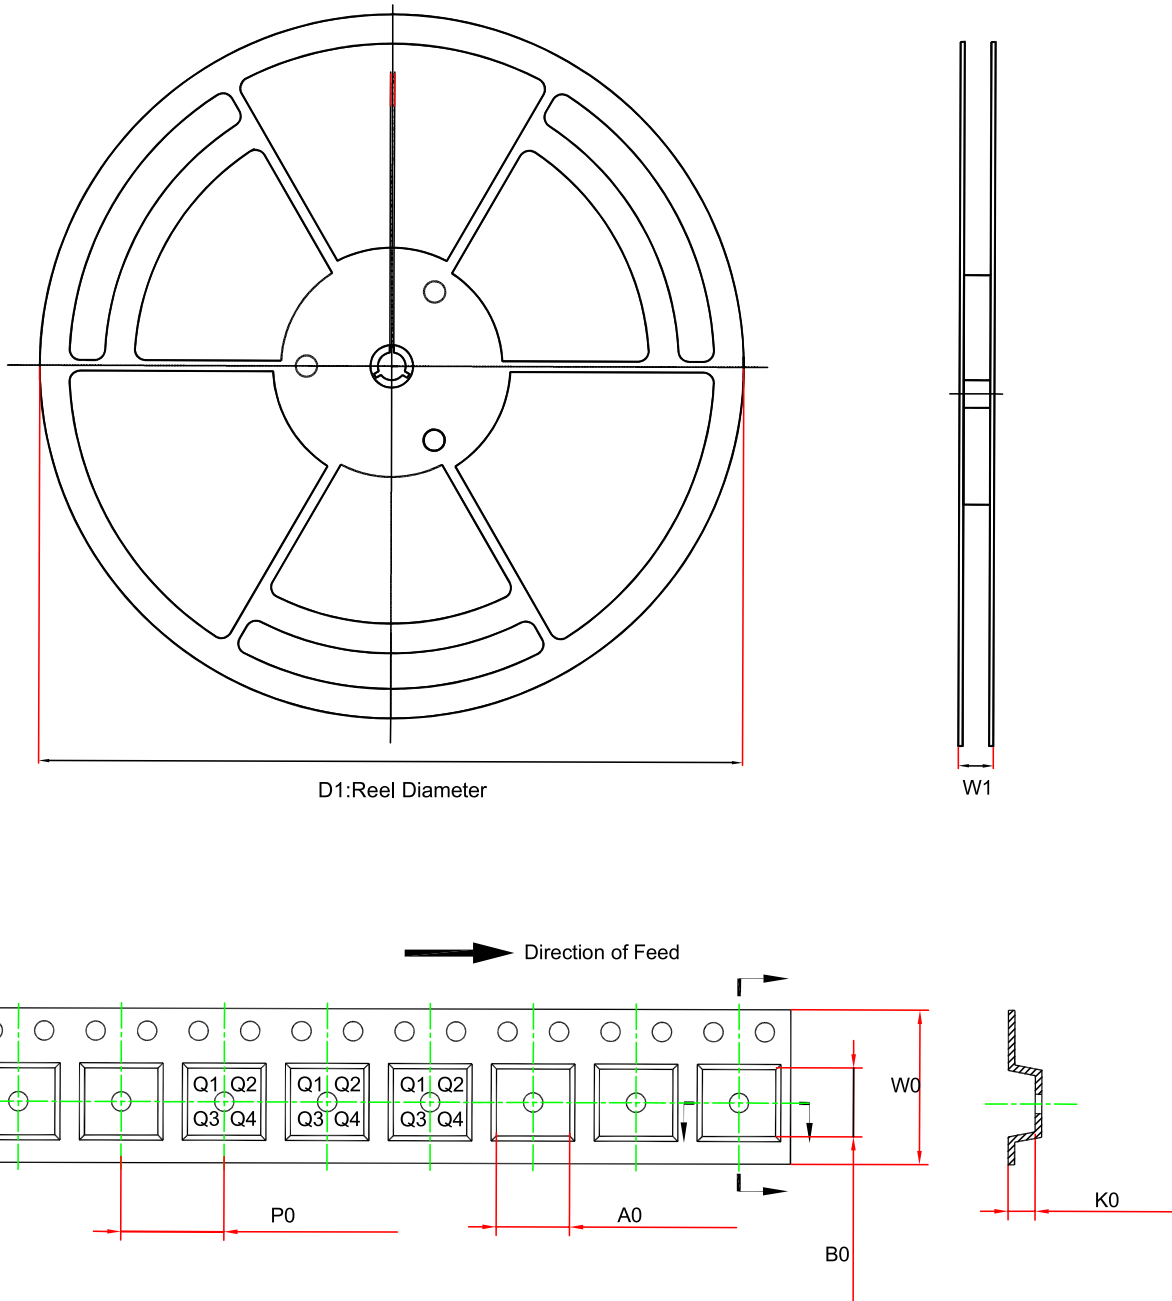

| Order Number  | Package           | D1 (mm) | W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | W0 (mm) | Pin1 Quadrant |
|---------------|-------------------|---------|---------|---------|---------|---------|---------|---------|---------------|
| TPL730ADJ-5TR | SOT23-5           | 180.0   | 13.1    | 3.2     | 3.2     | 1.4     | 4.0     | 8.0     | Q3            |
| TPL730Fxx-5TR | SOT23-5           | 180.0   | 13.1    | 3.2     | 3.2     | 1.4     | 4.0     | 8.0     | Q3            |
| TPL730ADJ-CR  | SOT353-5 (SC70-5) | 178.0   | 12.3    | 2.4     | 2.5     | 1.2     | 4.0     | 8.0     | Q3            |


**300-mA Output, High PSRR, Low-Dropout Linear Regulator**





| Order Number     | Package              | D1 (mm) | W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | W0 (mm) | Pin1<br>Quadrant |
|------------------|----------------------|---------|---------|---------|---------|---------|---------|---------|------------------|
| TPL730Fxx-<br>CR | SOT353-5<br>(SC70-5) | 178.0   | 12.3    | 2.4     | 2.5     | 1.2     | 4.0     | 8.0     | Q3               |
| TPL730Fxx-FR     | DFN1×1-4             | 180.0   | 10.0    | 1.16    | 1.16    | 0.5     | 2.0     | 8.0     | Q1               |

(1) The output voltage value, xx = 12 to 33, e.g., 33 means 3.3-V output voltage.

## Package Outline Dimensions

### SOT23-5



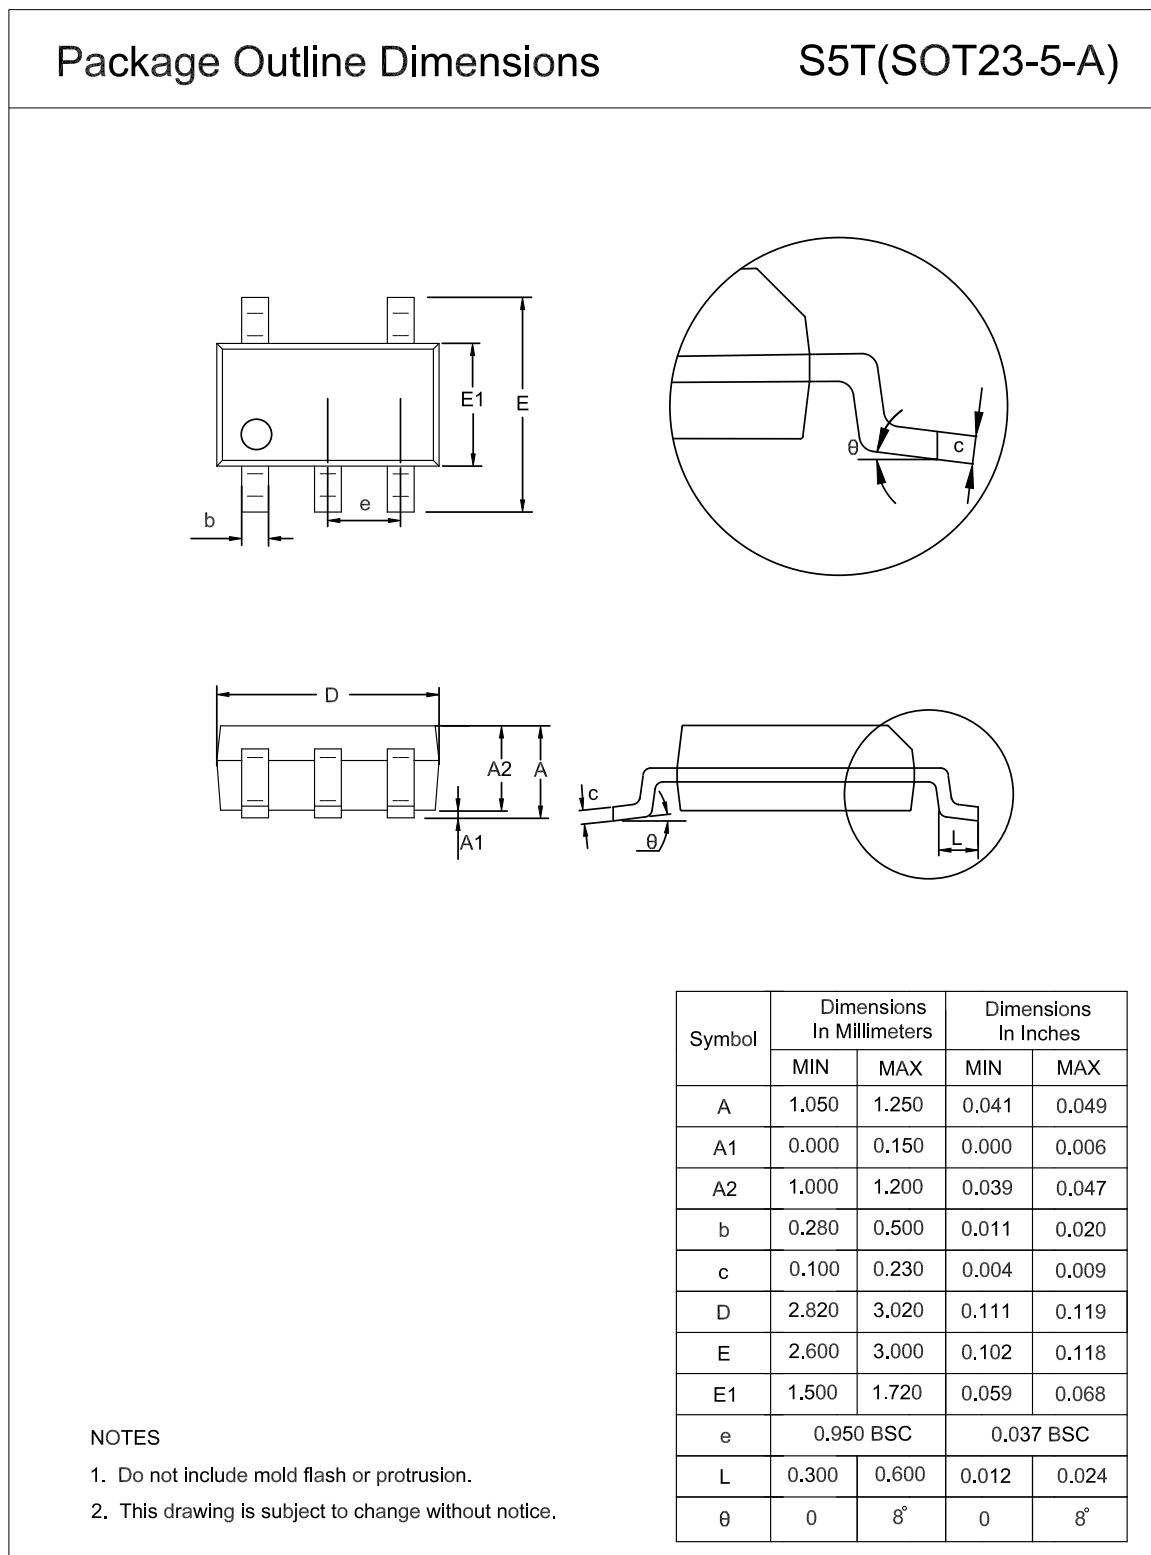


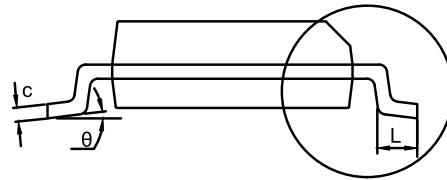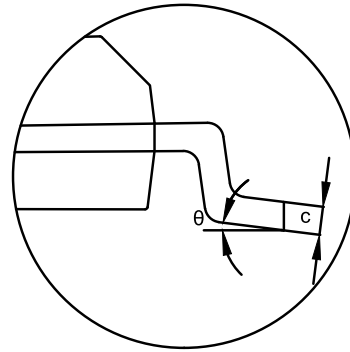**SOT353-5 (SC70-5)**
**Package Outline Dimensions**
**SC5(SOT353-5-A)**


| Symbol   | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|----------|------------------------------|-------|-------------------------|-------|
|          | MIN                          | MAX   | MIN                     | MAX   |
| A        | 0.850                        | 1.100 | 0.033                   | 0.043 |
| A1       | 0.000                        | 0.100 | 0.000                   | 0.004 |
| A2       | 0.800                        | 1.000 | 0.031                   | 0.039 |
| b        | 0.150                        | 0.350 | 0.006                   | 0.014 |
| c        | 0.110                        | 0.230 | 0.004                   | 0.009 |
| D        | 2.000                        | 2.200 | 0.079                   | 0.087 |
| E        | 2.150                        | 2.450 | 0.085                   | 0.096 |
| E1       | 1.150                        | 1.350 | 0.045                   | 0.053 |
| e        | 0.650 BSC                    |       | 0.026 BSC               |       |
| L        | 0.260                        | 0.460 | 0.010                   | 0.018 |
| $\theta$ | 0                            | 8°    | 0                       | 8°    |

**NOTES**

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

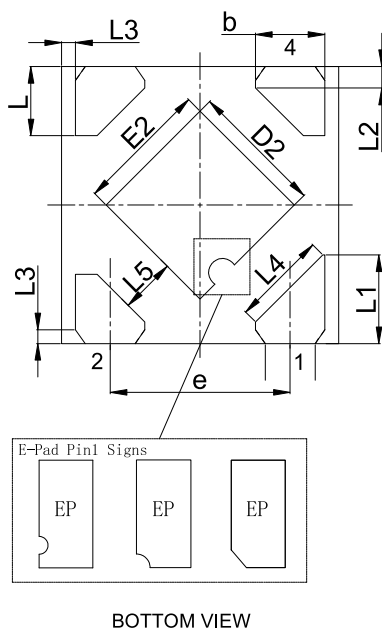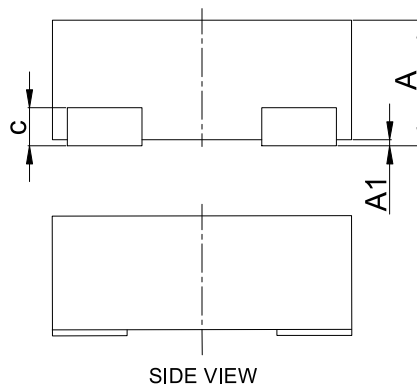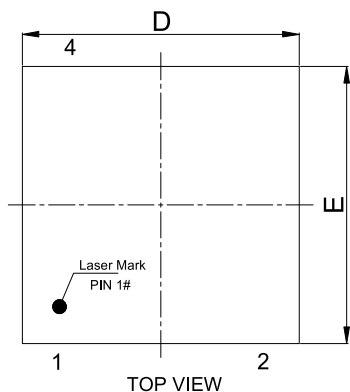**DFN1×1-4**
**Package Outline Dimensions**
**DF1(DFN1X1-4-A)**


| Symbol | Dimensions<br>In Millimeters |       | Dimensions<br>In Inches |       |
|--------|------------------------------|-------|-------------------------|-------|
|        | MIN                          | MAX   | MIN                     | MAX   |
| A      | 0.350                        | 0.400 | 0.014                   | 0.016 |
| A1     | 0.000                        | 0.050 | 0.000                   | 0.002 |
| b      | 0.200                        | 0.300 | 0.008                   | 0.012 |
| c      | 0.070                        | 0.170 | 0.003                   | 0.007 |
| D      | 0.950                        | 1.050 | 0.037                   | 0.041 |
| D2     | 0.430                        | 0.530 | 0.017                   | 0.021 |
| E      | 0.950                        | 1.050 | 0.037                   | 0.041 |
| E2     | 0.430                        | 0.530 | 0.017                   | 0.021 |
| e      | 0.650 BSC                    |       | 0.026 BSC               |       |
| L      | 0.200                        | 0.300 | 0.008                   | 0.012 |
| L1     | 0.270                        | 0.370 | 0.011                   | 0.015 |
| L2     | 0.077 BSC                    |       | 0.003 BSC               |       |
| L3     | 0.050 BSC                    |       | 0.002 BSC               |       |
| L4     | 0.340 BSC                    |       | 0.013 BSC               |       |
| L5     | 0.200 BSC                    |       | 0.008 BSC               |       |

**NOTES**

- Do not include mold flash or protrusion.
- This drawing is subject to change without notice.
- The many types of E-pad Pin1 signs may appear in the product.

**Order Information**

| Order Number                | Operating Temperature Range | Package           | Marking Information | MSL | Transport Media, Quantity | Eco Plan |
|-----------------------------|-----------------------------|-------------------|---------------------|-----|---------------------------|----------|
| TPL730ADJ-5TR               | -40 to 125°C                | SOT23-5           | L6A                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F12-5TR               | -40 to 125°C                | SOT23-5           | L6D                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F15-5TR               | -40 to 125°C                | SOT23-5           | L6K                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F18-5TR               | -40 to 125°C                | SOT23-5           | L6F                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F25-5TR               | -40 to 125°C                | SOT23-5           | L6G                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F28-5TR               | -40 to 125°C                | SOT23-5           | L6H                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F30-5TR               | -40 to 125°C                | SOT23-5           | L6I                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F33-5TR               | -40 to 125°C                | SOT23-5           | L6J                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730ADJ-CR                | -40 to 125°C                | SOT353-5 (SC70-5) | L6A                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F12-CR <sup>(1)</sup> | -40 to 125°C                | SOT353-5 (SC70-5) | L6D                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F15-CR <sup>(1)</sup> | -40 to 125°C                | SOT353-5 (SC70-5) | L6K                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F18-CR                | -40 to 125°C                | SOT353-5 (SC70-5) | L6F                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F25-CR <sup>(1)</sup> | -40 to 125°C                | SOT353-5 (SC70-5) | L6G                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F28-CR                | -40 to 125°C                | SOT353-5 (SC70-5) | L6H                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F30-CR                | -40 to 125°C                | SOT353-5 (SC70-5) | L6I                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F33-CR                | -40 to 125°C                | SOT353-5 (SC70-5) | L6J                 | 3   | Tape and Reel, 3,000      | Green    |
| TPL730F12-FR                | -40 to 125°C                | DFN1x1-4          | L6D                 | 3   | Tape and Reel, 12,000     | Green    |
| TPL730F15-FR                | -40 to 125°C                | DFN1x1-4          | L6K                 | 3   | Tape and Reel, 12,000     | Green    |
| TPL730F18-FR                | -40 to 125°C                | DFN1x1-4          | L6F                 | 3   | Tape and Reel, 12,000     | Green    |
| TPL730F25-FR                | -40 to 125°C                | DFN1x1-4          | L6G                 | 3   | Tape and Reel, 12,000     | Green    |

---

300-mA Output, High PSRR, Low-Dropout Linear Regulator

| Order Number | Operating Temperature Range | Package  | Marking Information | MSL | Transport Media, Quantity | Eco Plan |
|--------------|-----------------------------|----------|---------------------|-----|---------------------------|----------|
| TPL730F28-FR | -40 to 125°C                | DFN1x1-4 | L6H                 | 3   | Tape and Reel, 12,000     | Green    |
| TPL730F30-FR | -40 to 125°C                | DFN1x1-4 | L6I                 | 3   | Tape and Reel, 12,000     | Green    |
| TPL730F33-FR | -40 to 125°C                | DFN1x1-4 | L6J                 | 3   | Tape and Reel, 12,000     | Green    |

(1) For future products, contact the 3PEAK factory for more information and samples.

**Green:** 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

## **IMPORTANT NOTICE AND DISCLAIMER**

**Copyright**© 3PEAK 2012-2024. All rights reserved.

**Trademarks.** Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

**Performance Information.** Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

**Disclaimer.** 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.