

Features

- Fixed Output Voltage:
 - 1.25 V, 2.048 V, 2.5 V, 3 V, 3.3 V, 4.096 V
- High Initial Accuracy
 - Max 0.15%
 - 30 ppm/°C
- Low Temperature Coefficient
 - 30 ppm/°C
- Operation Temperature Range: -40°C to 125°C
- Output Noise: 50 μ Vpp of TPR3325
- Quiescent current: 180 μ A
- Stable with 0.1 to 10 μ F Capacitive Loads
- Qualified for Automotive Applications with AEC-Q100 Reliability Test (SOT23G-3 Package)
- Package Options:
 - SOT23G-3
 - QFN1.5X1.5-8

Applications

- Power
- Instrumentation
- Industry

Description

The TPR33-S product is a voltage reference with guaranteed temperature stability over the entire operating temperature range. The temperature range is extended from -40 °C to +125 °C.

Typical Application Circuit

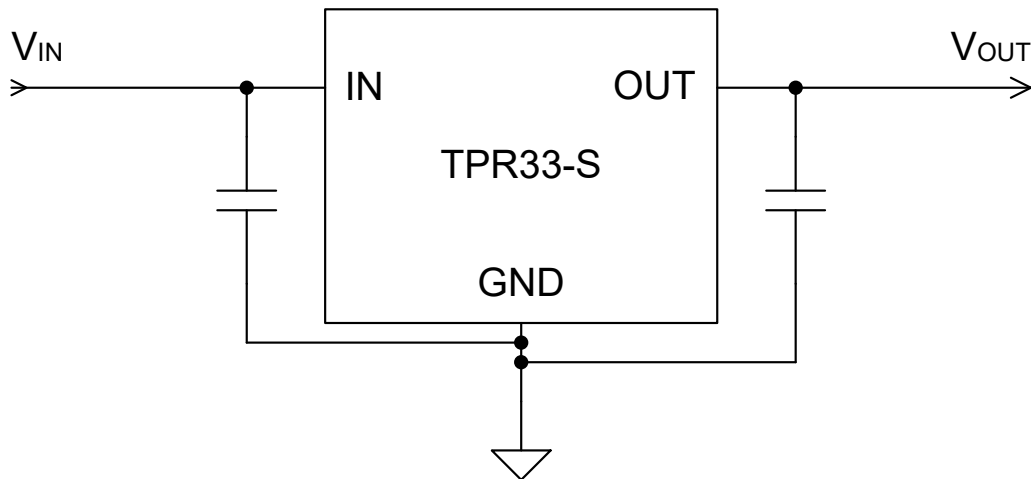


Table of Contents

Features.....	1
Applications.....	1
Description.....	1
Typical Application Circuit.....	1
Product Family Table.....	3
Revision History.....	3
Pin Configuration and Functions.....	4
Specifications.....	5
Absolute Maximum Ratings ⁽¹⁾	5
ESD, Electrostatic Discharge Protection.....	5
Recommended Operating Conditions.....	5
Thermal Information.....	5
Electrical Characteristics.....	6
Typical Performance Characteristics – TPR3325.....	8
Tape and Reel Information.....	11
Package Outline Dimensions.....	12
SOT23G-3.....	12
QFN1.5X1.5-8.....	13
Order Information.....	14
IMPORTANT NOTICE AND DISCLAIMER.....	15

Product Family Table

Order Number	Output Voltage (V)	AEC-Q100 Reliability Test	Package
TPR3312-S3TR-S	1.25	Pass	SOT23G-3
TPR3320-S3TR-S	2.048	Pass	SOT23G-3
TPR3325-S3TR-S	2.5	Pass	SOT23G-3
TPR3330-S3TR-S	3	Pass	SOT23G-3
TPR3333-S3TR-S	3.3	Pass	SOT23G-3
TPR3340-S3TR-S	4.096	Pass	SOT23G-3
TPR3312-QF11R-S	1.25	N/A	QFN1.5X1.5-8
TPR3320-QF11R-S	2.048	N/A	QFN1.5X1.5-8
TPR3325-QF11R-S	2.5	N/A	QFN1.5X1.5-8
TPR3330-QF11R-S	3	N/A	QFN1.5X1.5-8
TPR3333-QF11R-S	3.3	N/A	QFN1.5X1.5-8
TPR3340-QF11R-S	4.096	N/A	QFN1.5X1.5-8

Revision History

Revision	Notes
Rev.Pre.0	Pre-Release version.
Rev.Pre.1	Updated Limit.
Rev.Pre.2	Updated Voltage Output.
Rev.A.0	Initial version.
Rev.A.1	1. Added Tape and Reel Information. 2. Added common condition in electrical characteristics: $V_S = 5\text{ V}$.
Rev.A.2	Updated ESD Rating.
Rev.A.3	1. Added typical value of Long-term stability. 2. Corrected test conditions in the Electrical Characteristics table.
Rev.A.4	Updated SOT23G-3 Package Products with Qualified for Automotive Applications with AEC-Q100 Reliability Test.
Rev.A.5	1. Updated to a new datasheet format. 2. Added the Typical Application Circuit.
Rev.A.6	1. Added I_{OUT} in the Recommended Operating Conditions. 2. Added Output Voltage vs. Load Current figure in the Typical Performance Characteristics. 3. Corrected Order Number in the Order Information.
Rev.A.7	Corrected Order Number in the Product Family Table.

Pin Configuration and Functions

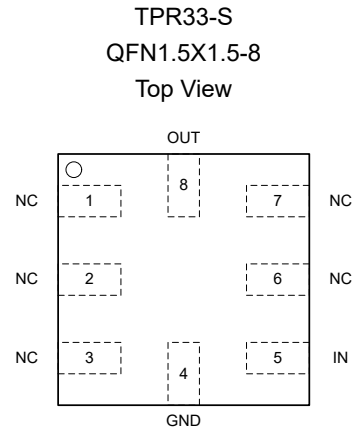
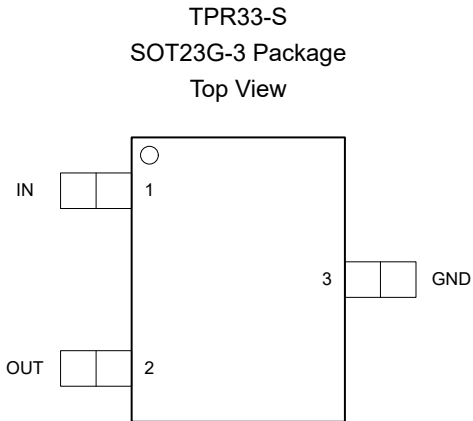


Table 1. Pin Functions: TPR33-S

Pin Number		Pin Name	I/O	Description
SOT23G-3	QFN1.5X1.5-8			
3	4	GND	-	Ground.
1	5	IN	I	Supply voltage input pin.
-	1, 2, 3, 6, 7	NC	-	No internal connection.
2	8	OUT	O	Reference voltage output pin.

Specifications

Absolute Maximum Ratings ⁽¹⁾

Parameter		Min	Max	Unit
V _{IN}		−0.3	6.9	V
T _J	Junction Temperature Range	−40	150	°C
T _A	Operating Temperature Range	−40	125	°C
T _{STG}	Storage Temperature Range	−65	150	°C
T _L	Lead Temperature (Soldering 10 sec)		260	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

ESD, Electrostatic Discharge Protection

Symbol	Parameter	Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±4	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 ⁽²⁾	±1.5	kV

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Recommended Operating Conditions

Parameter		Min	Max	Unit
V _{IN}	Supply Voltage	2.1	5.5	V
I _{OUT}	Output Current	−20	20	mA
T _J	Junction Temperature Range	−40	125	°C

Thermal Information

Package Type	θ _{JA}	θ _{Jc}	Unit
SOT23G-3	250	81	°C/W
QFN 1.5X1.5-8	80	40	°C/W

Electrical Characteristics

All test conditions: $V_{IN} = 5\text{ V}$, $T_A = +25^\circ\text{C}$, unless otherwise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
TPR3312						
V_{OUT}	Output Voltage			1.25		V
	Initial Accuracy		-0.15		0.15	%
	Output Voltage Noise	$f = 0.1\text{ Hz to }10\text{ Hz}$		25		μVpp
TPR3320						
V_{OUT}	Output Voltage			2.048		V
	Initial Accuracy		-0.15		0.15	%
	Output Voltage Noise	$f = 0.1\text{ Hz to }10\text{ Hz}$		40		μVpp
TPR3325						
V_{OUT}	Output Voltage			2.5		V
	Initial Accuracy		-0.15		0.15	%
	Output Voltage Noise	$f = 0.1\text{ Hz to }10\text{ Hz}$		50		μVpp
TPR3330						
V_{OUT}	Output Voltage			3.0		V
	Initial Accuracy		-0.15		0.15	%
	Output Voltage Noise	$f = 0.1\text{ Hz to }10\text{ Hz}$		60		μVpp
TPR3333						
V_{OUT}	Output Voltage			3.3		V
	Initial Accuracy		-0.15		0.15	%
	Output Voltage Noise	$f = 0.1\text{ Hz to }10\text{ Hz}$		66		μVpp
TPR3340						
V_{OUT}	Output Voltage			4.096		V
	Initial Accuracy		-0.15		0.15	%
	Output Voltage Noise	$f = 0.1\text{ Hz to }10\text{ Hz}$		80		μVpp
TPR3312, TPR3320, TPR3325, TPR3330, TPR3333, TPR3340, Power Supply						
V_{IN}	Supply Voltage	TPR3312	2.1		5.5	V
		All parts except TPR3312, $I_{LOAD} = \pm 1\text{ mA}$	$V_{OUT} + 0.05$		5.5	V
I_Q	Quiescent Current				180	μA
		$T_A = -40\text{ to }125^\circ\text{C}$			215	μA
V_{DP}	Minimum Dropout Voltage	$I_{LOAD} = \pm 1\text{ mA}$, all parts except TPR3312	$T_A = 25^\circ\text{C}$	25	50	mV
			$T_A = 0^\circ\text{C to }70^\circ\text{C}$		50	mV
			$T_A = -40^\circ\text{C to }125^\circ\text{C}$		100	mV

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
		$I_{LOAD} = \pm 5 \text{ mA}$, all parts except TPR3312			200	mV
		$T_A = 25^\circ\text{C}$				
		$T_A = -40^\circ\text{C to } 125^\circ\text{C}$			250	mV
TPR3312, TPR3320, TPR3325, TPR3330, TPR3333, TPR3340, Reference Output						
ΔV_{OUT}	Output Voltage	$T_A = -40^\circ\text{C to } 85^\circ\text{C}$		10	20	ppm/ $^\circ\text{C}$
	Temperature Drift	$T_A = -40^\circ\text{C to } 125^\circ\text{C}$		15	30	ppm/ $^\circ\text{C}$
	Line Regulation, TPR3312	$V_{IN} = 2.1 \text{ to } 5.5 \text{ V}^{(1)}$	-65		65	ppm/V
		$V_{IN} = 2.1 \text{ to } 5.5 \text{ V}^{(1)}, T_A = -40^\circ\text{C to } 125^\circ\text{C}$	-85		85	ppm/V
	Line Regulation, TPR33XX Except TPR3312	$V_{IN} = V_{OUT} + 300 \text{ mV}$ to 5.5 V	-50		50	ppm/V
		$T_A = -40^\circ\text{C to } 125^\circ\text{C}$	-70		70	ppm/V
	Load Regulation	$V_{IN} = V_{OUT} + 300 \text{ mV}$, $I_{LOAD} = -5 \text{ to } 5 \text{ mA}^{(1)}$	-20		20	ppm/mA
		$T_A = -40^\circ\text{C to } 125^\circ\text{C}$	-30		30	ppm/mA
LTD	Long Term Stability	0 to 1000 hours, $T_A = 25^\circ\text{C}$		200		ppm
		1000 to 2000 hours, $T_A = 25^\circ\text{C}$		200		ppm
T_H	Thermal Hysteresis			80		ppm
I_{SC}	Short-circuit Current	Sourcing and sinking		50		mA
C_{LOAD}	Capacitive Load		0.1		10	μF
t_{ON}	Turn-on Settling Time	To 0.1% with $C_L = 1 \mu\text{F}$		500		μs

(1) The minimum supply voltage for the TPR3312 is 2.1 V.

Typical Performance Characteristics – TPR3325

All test conditions: $T_A = +25^\circ\text{C}$, unless otherwise noted.

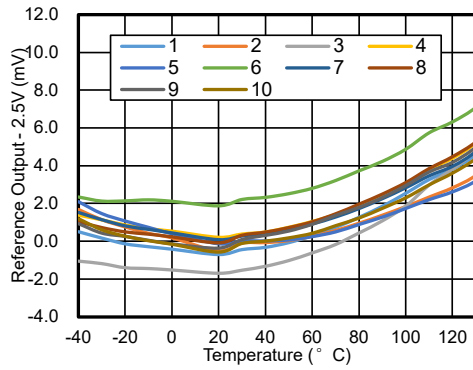


Figure 1. V_{OUT} vs. Temperature, 10-pcs Samples, $V_{IN} = 5$ V, $C_{IN} = 1\ \mu\text{F}$, $C_{OUT} = 1\ \mu\text{F}$

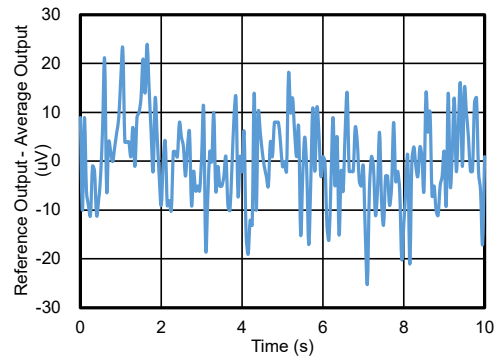


Figure 2. 0.1 to 10-Hz Voltage Noise, $V_{IN} = 5$ V, $C_{IN} = 1\ \mu\text{F}$, $C_{OUT} = 1\ \mu\text{F}$

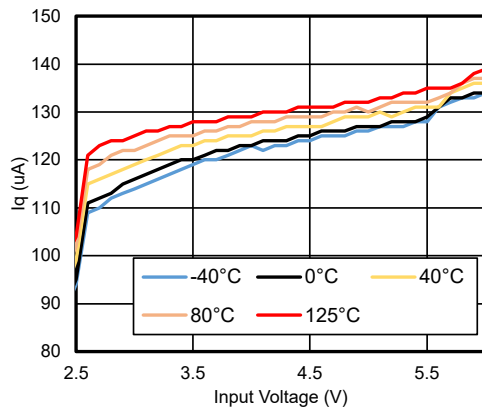


Figure 3. I_Q vs. Input Voltage

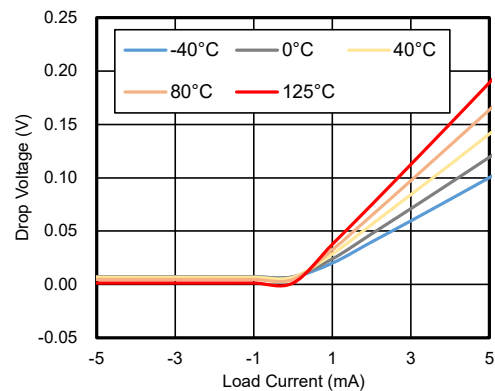


Figure 4. Drop Voltage vs. Load Current

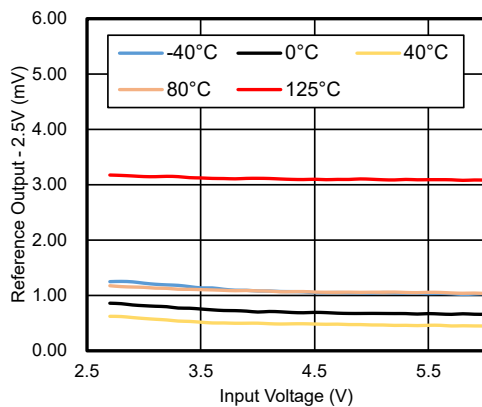


Figure 5. Output Voltage vs. Input Voltage

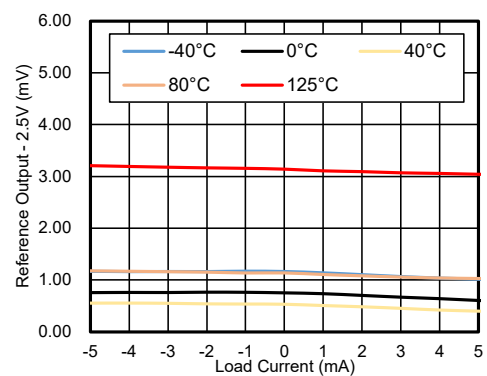


Figure 6. Output Voltage vs. Load Current

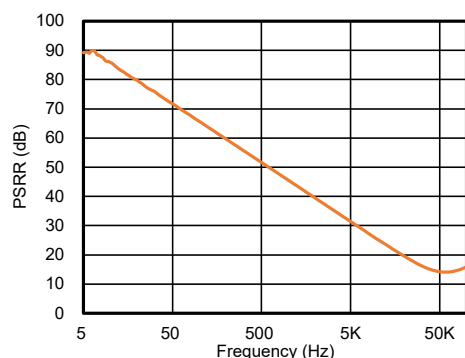


Figure 7. PSRR vs. Frequency


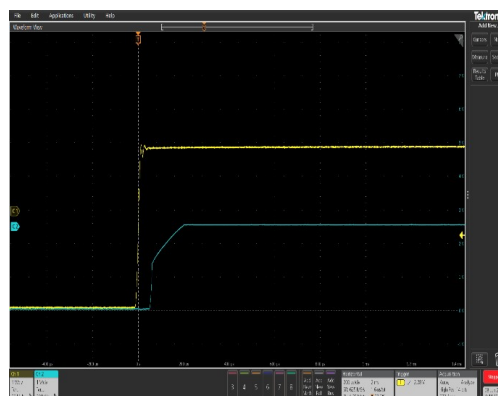
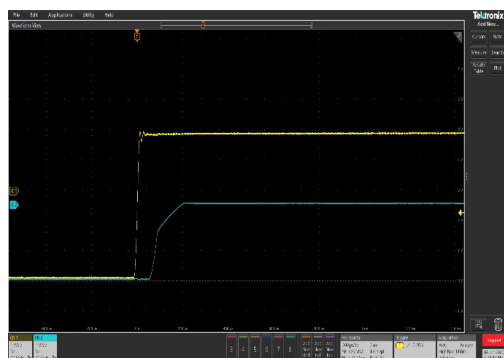

Figure 8. Step Response, $V_{IN} = 5\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $200\text{ }\mu\text{s/div}$

Figure 9. Step Response, $V_{IN} = 5\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 1\text{ }\mu\text{F}$, $200\text{ }\mu\text{s/div}$

Figure 10. Step Response, $V_{IN} = 5\text{ V}$, $V_{IN} = 5\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 10\text{ }\mu\text{F}$, $200\text{ }\mu\text{s/div}$

Figure 11. Load Transient, $\pm 5\text{ mA}$, $V_{IN} = 5\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 1\text{ }\mu\text{F}$, 50 mV/div

Figure 12. Load Transient, $\pm 5\text{ mA}$, $V_{IN} = 2.8\text{ V}$, $C_{IN} = 1\text{ }\mu\text{F}$, $C_{OUT} = 1\text{ }\mu\text{F}$, 50 mV/div

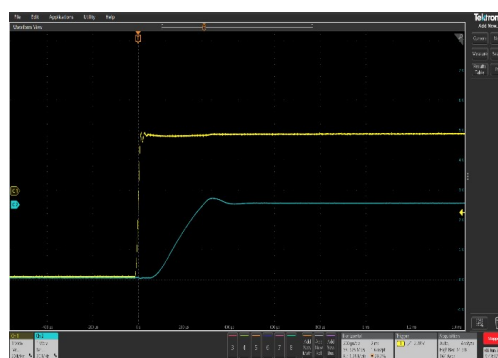

Figure 13. Load Transient, ± 2 mA, $V_{IN} = 5$ V, $C_{IN} = 1$ μ F, $C_{OUT} = 1$ μ F, 20 mV/div



Figure 14. Load Transient, ± 2 mA, $V_{IN} = 2.8$ V, $C_{IN} = 1$ μ F, $C_{OUT} = 1$ μ F, 20 mV/div

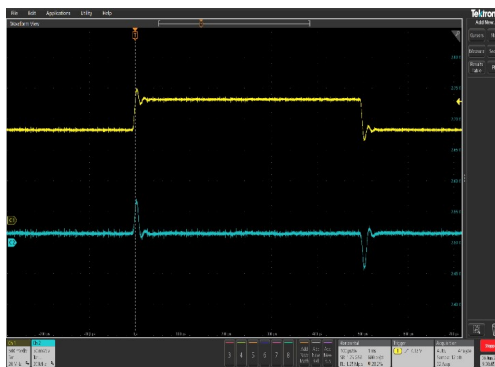


Figure 15. Line Transient, 500-mV Step, $C_{IN} = 1$ μ F, $C_{OUT} = 1$ μ F, 50 mV/div


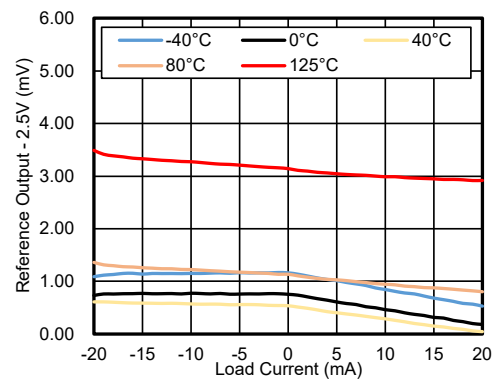


Figure 16. Output Voltage vs. Load Current

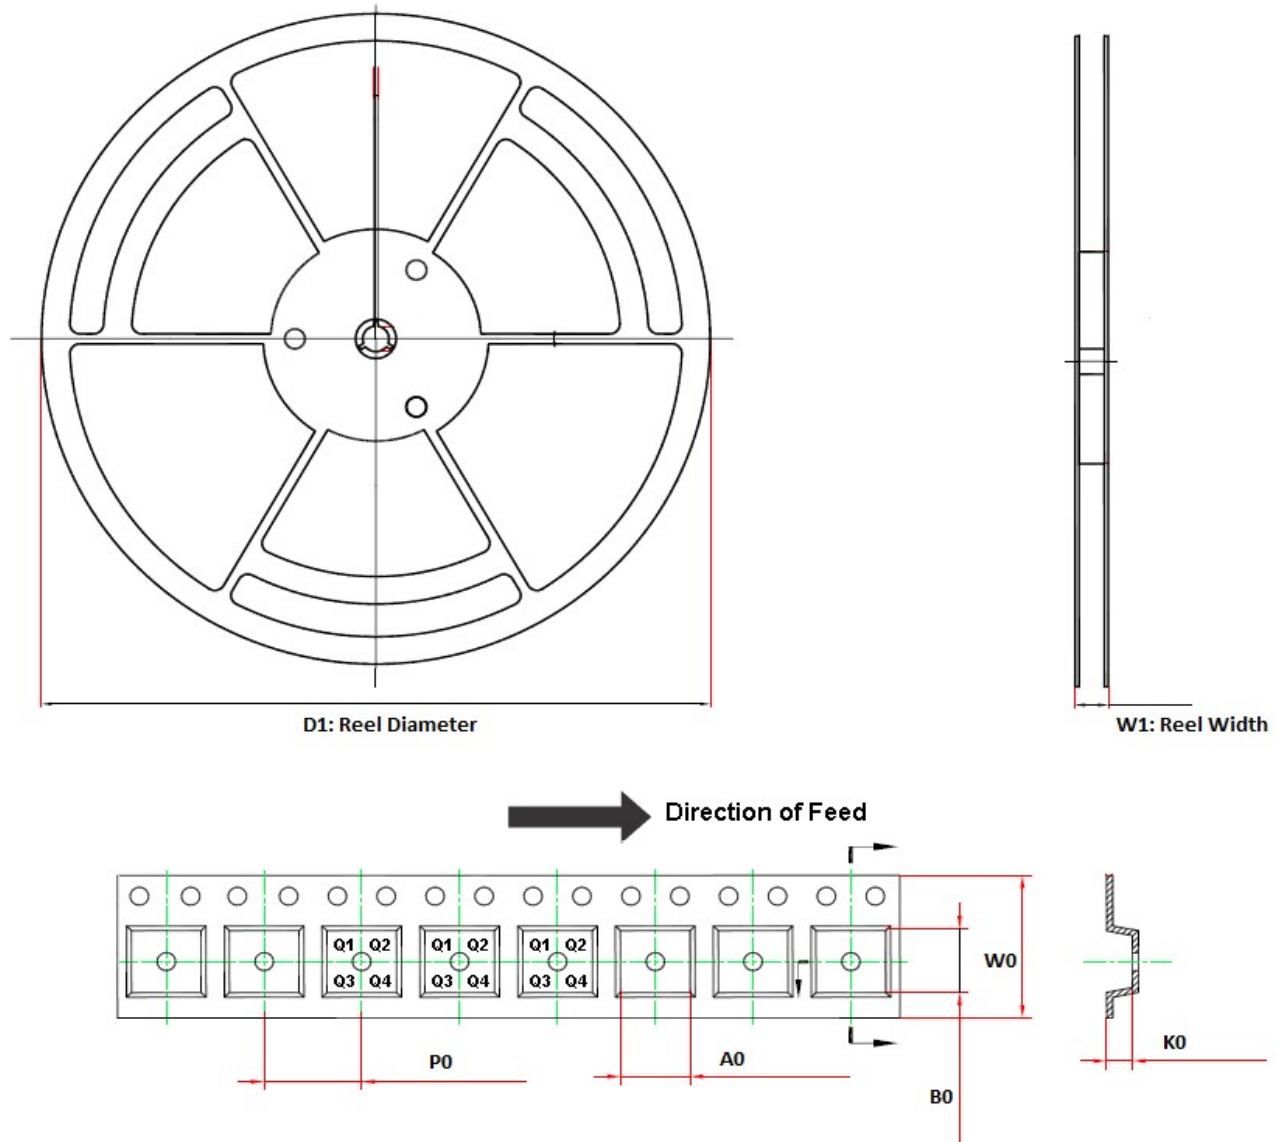Tape and Reel Information



Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPR33xx-S3TR-S	SOT23G-3	178	12.1	3.15	2.77	1.22	4.0	8.0	Q3
TPR33xx-QF11R-S	QFN1.5X1.5-8	180	12.3	1.7	1.7	0.8	4.0	8.0	Q2





(1) Output voltage, xx = 12 to 40.

Package Outline Dimensions

SOT23G-3

Package Outline Dimensions

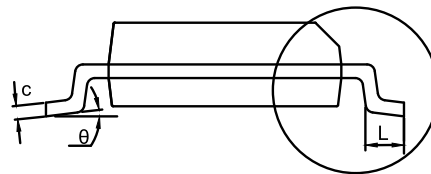3ST(SOT23G-3-A)



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.890	1.120	0.035	0.044
A1	0.000	0.100	0.000	0.004
A2	0.890	1.100	0.035	0.043
b	0.280	0.500	0.011	0.020
c	0.132	0.230	0.005	0.009
D	2.800	3.000	0.110	0.118
E	2.250	2.640	0.089	0.104
E1	1.200	1.400	0.047	0.055
e	0.950 BSC		0.037 BSC	
L	0.300	0.600	0.012	0.024
θ	0	8°	0	8°


NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.


QFN1.5X1.5-8

Package Outline Dimensions

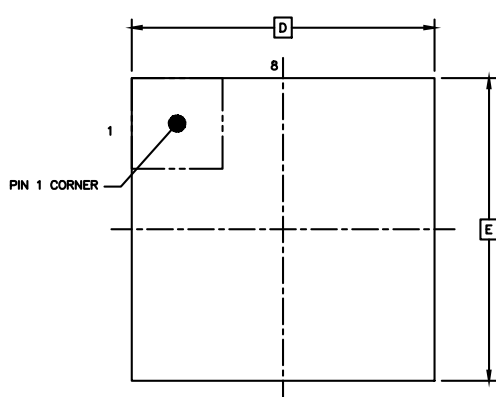
QFR(QFN1.5X1.5-8-A)



TOP VIEW

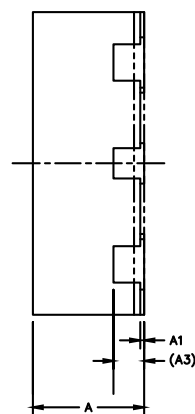

SIDE VIEW

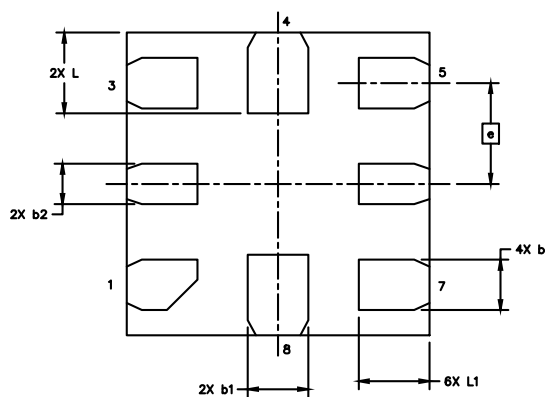

BOTTOM VIEW

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.500	0.600	0.020	0.024
A1	0.000	0.050	0.000	0.002
b	0.200	0.300	0.008	0.012
b1	0.250	0.350	0.010	0.014
b2	0.150	0.250	0.006	0.010
A3	0.152 REF		0.006 REF	
D	1.500 BSC		0.059 REF	
E	1.500 BSC		0.059 REF	
e	0.500 BSC		0.020 BSC	
L	0.350	0.450	0.014	0.018
L1	0.300	0.400	0.012	0.016

Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPR3312-S3TR-S	-40 to 125°C	SOT23G-3	R3A	MSL3	3,000	Green
TPR3320-S3TR-S	-40 to 125°C	SOT23G-3	R3B	MSL3	3,000	Green
TPR3325-S3TR-S	-40 to 125°C	SOT23G-3	R3C	MSL3	3,000	Green
TPR3330-S3TR-S	-40 to 125°C	SOT23G-3	R3D	MSL3	3,000	Green
TPR3333-S3TR-S	-40 to 125°C	SOT23G-3	R3E	MSL3	3,000	Green
TPR3340-S3TR-S	-40 to 125°C	SOT23G-3	R3F	MSL3	3,000	Green
TPR3312-QF11R-S	-40 to 125°C	QFN1.5X1.5-8	3A	MSL3	3,000	Green
TPR3320-QF11R-S ⁽¹⁾	-40 to 125°C	QFN1.5X1.5-8	3B	MSL3	3,000	Green
TPR3325-QF11R-S	-40 to 125°C	QFN1.5X1.5-8	3C	MSL3	3,000	Green
TPR3330-QF11R-S	-40 to 125°C	QFN1.5X1.5-8	3D	MSL3	3,000	Green
TPR3333-QF11R-S ⁽¹⁾	-40 to 125°C	QFN1.5X1.5-8	3E	MSL3	3,000	Green
TPR3340-QF11R-S ⁽¹⁾	-40 to 125°C	QFN1.5X1.5-8	3F	MSL3	3,000	Green

(1) For future products, contact the 3PEAK factory for more information and samples.

Green: 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

IMPORTANT NOTICE AND DISCLAIMER

Copyright© 3PEAK 2012-2024. All rights reserved.

Trademarks. Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

Performance Information. Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

Disclaimer. 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.

This page intentionally left blank