

## Features

- 8-bit Bidirectional Level Shift, Push-Pull Output
- Max Data Rate (Push-Pull):
  - 100 Mbps at  $V_{CCA} = 3.3\text{ V}$  and  $V_{CCB} = 5\text{ V}$
- Voltage-Level Translation Between:
  - $V_{CCA}$  Range: 1.2 V to 3.6 V
  - $V_{CCB}$  Range: 1.65 V to 5.5 V
- 5-V Tolerant OE (Output Enable) Pin
- High-impedance A1~8 and B1~8 Pins for OE = LOW
- VCC Isolation Feature: Either VCC Input = GND, All Outputs in the High-impedance State
- I<sub>OFF</sub> Supports Partial Power-down Mode
- No Power Up Sequence Required for  $V_{CCA}$  and  $V_{CCB}$
- ESD Protection:
  - A Port  $\pm 4000\text{-V}$  Human-Body Model
  - B Port  $\pm 8000\text{-V}$  Human-Body Model
  - B Port  $\pm 4000\text{-V}$  IEC 61000-4-2 Contact Discharge
  - 1500-V Charged-Device Model
- AEC-Q100 Qualified for Automotive Applications
  - Device Temperature Grade 1:  $-40\text{ }^{\circ}\text{C}$  to  $125\text{ }^{\circ}\text{C}$

## Applications

- Automotive and Transportation
  - Body Electronics / Lighting
  - Power Train / Chassis
  - Infotainment / Cluster
  - ADAS / Safety
- GPIO, UART, and other Interfaces

## Description


The TPT20208Q device is an 8-bit level shifter, with an enable (OE) input and can work within the  $V_{CCA}$  range from 1.2 V to 3.6 V, and the  $V_{CCB}$  range from 1.65 V to 5.5 V.  $V_{CCA}$  must be less than or equal to  $V_{CCB}$ . TPT20208Q supports bidirectional voltage translation among 1.2 V, 1.5 V, 1.8 V, 2.5 V, 3.3 V, and 5 V.

The A1~8 I/Os are connected to the B1~8 I/Os, which allows bidirectional data flowing between ports. If OE is low, the translator switch is off, and a high-impedance state exists between port A and port B to isolate both sides. The OE input circuit is internally connected to  $V_{CCA}$ .

The 8-bit bidirectional buffer isolates capacitance and allows 15 pF on either side of the device to support 100 Mbps speed in Push-Pull mode in 3.3 V  $V_{CCA}$  and 5 V  $V_{CCB}$  supply.

The TPT20208Q is available in the TSSOP20 package and is characterized from  $-40\text{ }^{\circ}\text{C}$  to  $+125\text{ }^{\circ}\text{C}$ .

## Typical Application

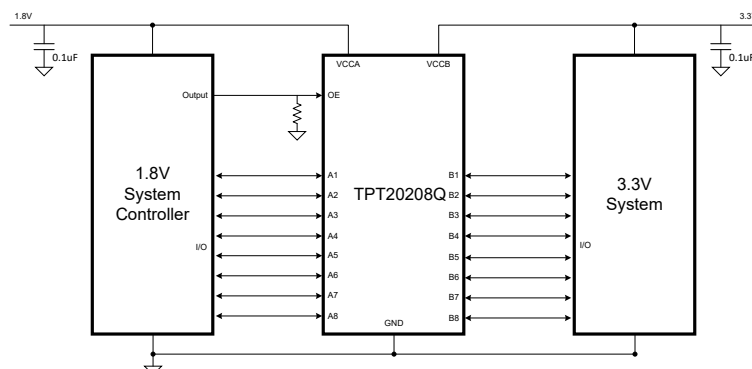

## Table of Contents


<b>Features</b> .....	<b>1</b>
<b>Applications</b> .....	<b>1</b>
<b>Description</b> .....	<b>1</b>
<b>Typical Application</b> .....	<b>1</b>
<b>Revision History</b> .....	<b>3</b>
<b>Pin Configuration and Functions</b> .....	<b>4</b>
<b>Specifications</b> .....	<b>5</b>
Absolute Maximum Ratings <sup>(1)</sup> .....	5
ESD, Electrostatic Discharge Protection.....	5
Recommended Operating Conditions.....	6
Thermal Information.....	6
Electrical Characteristics.....	7
AC Timing Requirements — VCCA = 1.2 V.....	9
AC Timing Requirements — VCCA = 1.5 V.....	11
AC Timing Requirements — VCCA = 1.8 V.....	13
AC Timing Requirements — VCCA = 2.5 V.....	15
AC Timing Requirements — VCCA = 3.3 V.....	16
Parameter Measurement Waveforms.....	17
<b>Detailed Description</b> .....	<b>18</b>
Overview.....	18
Functional Block Diagram.....	18
Feature Description.....	18
<b>Application and Implementation</b> .....	<b>20</b>
Application Information .....	20
Typical Application.....	20
<b>Layout</b> .....	<b>21</b>
Layout Example.....	21
<b>Tape and Reel Information</b> .....	<b>22</b>
<b>Package Outline Dimensions</b> .....	<b>23</b>
TSSOP20.....	23
<b>Order Information</b> .....	<b>24</b>
<b>IMPORTANT NOTICE AND DISCLAIMER</b> .....	<b>25</b>

## Revision History

Date	Revision	Notes
2024-08-01	Rev.P.0	Initial version
2026-04-09	Rev.A.0	Released version

## Pin Configuration and Functions

TPT20208Q-TS4R  
TSSOP20  
Top View

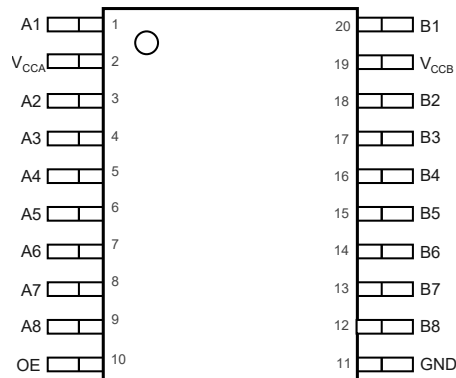

**Table 1. Pin Functions: TPT20208Q**

Pin		I/O	Description
No.	Name		
1	A1	I/O	Input/output A1. Referenced to $V_{CCA}$
2	$V_{CCA}$	P	Side-A Supply Voltage
3	A2	I/O	Input/output A2. Referenced to $V_{CCA}$
4	A3	I/O	Input/output A3. Referenced to $V_{CCA}$
5	A4	I/O	Input/output A4. Referenced to $V_{CCA}$
6	A5	I/O	Input/output A5. Referenced to $V_{CCA}$
7	A6	I/O	Input/output A6. Referenced to $V_{CCA}$
8	A7	I/O	Input/output A7. Referenced to $V_{CCA}$
9	A8	I/O	Input/output A8. Referenced to $V_{CCA}$
10	OE	I	Active-high Enable Input, Reference to $V_{CCA}$ , not allowed to be Floating
11	GND	P	Supply ground
12	B8	I/O	Input/output B8. Referenced to $V_{CCB}$
13	B7	I/O	Input/output B7. Referenced to $V_{CCB}$
14	B6	I/O	Input/output B6. Referenced to $V_{CCB}$
15	B5	I/O	Input/output B5. Referenced to $V_{CCB}$
16	B4	I/O	Input/output B4. Referenced to $V_{CCB}$
17	B3	I/O	Input/output B3. Referenced to $V_{CCB}$
18	B2	I/O	Input/output B2. Referenced to $V_{CCB}$
19	$V_{CCB}$	P	Side-B Supply Voltage
20	B1	I/O	Input/output B1. Referenced to $V_{CCB}$

**8-bit Bidirectional Level Shifter, Push-Pull Mode**
**Specifications**
**Absolute Maximum Ratings <sup>(1)</sup>**

Parameter		Min	Max	Unit
V <sub>CCA</sub>	DC Reference Voltage Range (Side-A)	-0.5	4.6	V
V <sub>CCB</sub>	DC Reference Bias Voltage Range (Side-B)	-0.5	6.5	V
V <sub>I</sub>	Input Voltage Range, Side-A	-0.5	4.6	V
	Input Voltage Range, Side-B	-0.5	6.5	V
V <sub>O</sub>	Voltage Range Applied to Any Output in the High-impedance or Power-off State, V <sub>O</sub> , Side-A	-0.5	4.6	V
	Voltage Range Applied to Any Output in the High-impedance or Power-off State, V <sub>O</sub> , Side-B	-0.5	6.5	V
	Voltage Range Applied to Any Output in the High or Low State, V <sub>O</sub> , Side-A	-0.5	V <sub>CCA</sub> + 0.5	V
	Voltage Range Applied to Any Output in the High or Low State, V <sub>O</sub> , Side-B	-0.5	V <sub>CCB</sub> + 0.5	V
I <sub>IK</sub>	Input Clamp Current, V <sub>I</sub> < 0		-50	mA
I <sub>OK</sub>	Output Clamp Current, V <sub>I/O</sub> < 0		-50	mA
I <sub>O</sub>	Continuous Output Current	-50	50	mA
I <sub>C</sub>	Continuous Current through Each V <sub>CCA</sub> , V <sub>CCB</sub> , or GND	-100	100	mA
T <sub>J</sub>	Maximum Junction Temperature		150	°C
T <sub>STG</sub>	Storage Temperature Range	-65	150	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

(2) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

(3) The values of V<sub>CCA</sub> and V<sub>CCB</sub> are provided in the recommended operating conditions table.

**ESD, Electrostatic Discharge Protection**

Parameter		Condition	Value	Unit
HBM	Human Body Model ESD, Side-A Ports	AEC Q100-002 <sup>(1)</sup>	±4	kV
	Human Body Model ESD, Side-B Ports	AEC Q100-002 <sup>(1)</sup>	±8	kV
CDM	Charged Device Model ESD, Side-A and Side-B Ports	Per AEC Q100-011	±1.5	kV
LU	Latch up	LU, per JESD78, All Pins <sup>(2)</sup>	±500	mA

(1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

(2) Test at the temperature of 25°C.

**8-bit Bidirectional Level Shifter, Push-Pull Mode**
**Recommended Operating Conditions**

Parameter		V <sub>CCA</sub>	V <sub>CCB</sub>	Min	Max	Unit
V <sub>CCA</sub>	Reference Voltage, Side-A			1.2	3.6	V
V <sub>CCB</sub>	Reference Voltage, Side-B			1.65	5.5	V
V <sub>IH</sub>	Side-A Ports High-level Input Voltage	1.2 V to 1.95 V	1.65 V to 5.5 V	V <sub>CCI</sub> <sup>(1)</sup> x 0.65	V <sub>CCI</sub> <sup>(1)</sup>	V
	Side-B Ports High-level Input Voltage	1.2 V to 3.6 V	1.65 V to 5.5 V	V <sub>CCI</sub> <sup>(1)</sup> x 0.65	V <sub>CCI</sub> <sup>(1)</sup>	V
	OE Inputs High-level Input Voltage	1.2 V to 3.6 V	1.65 V to 5.5 V	V <sub>CCA</sub> x 0.65	5.5	V
V <sub>IL</sub>	Side-A Ports Low-level Input Voltage	1.2 V to 3.6 V	1.65 V to 5.5 V	0	V <sub>CCI</sub> <sup>(1)</sup> x 0.35	V
	Side-B Ports Low-level Input Voltage	1.2 V to 3.6 V	1.65 V to 5.5 V	0	V <sub>CCI</sub> <sup>(1)</sup> x 0.35	V
	OE Inputs Low-level Input Voltage	1.2 V to 3.6 V	1.65 V to 5.5 V	0	V <sub>CCA</sub> x 0.35	V
Δt/Δv	Side-A Ports Input Transition Rise or Fall Rate	1.2 V to 3.6 V	1.65 V to 5.5 V		40	ns/V
	Side-B Ports Input Transition Rise or Fall Rate	1.2 V to 3.6 V	1.65 V to 5.5 V		40	
	OE Input Transition Rise or Fall Rate	1.2 V to 3.6 V	1.65 V to 5.5 V		40	
T <sub>A</sub>	Operating Ambient Temperature			-40	125	°C

(1) V<sub>CCI</sub> is the supply voltage of the input side-A or side-B port.

(2) V<sub>CCA</sub> should be less than or equal to V<sub>CCB</sub>, and V<sub>CCA</sub> must not be higher than 3.6 V.

**Thermal Information**

Package Type	θ <sub>JA</sub>	θ <sub>JC</sub>	Unit
TSSOP20	113	49	°C/W

**8-bit Bidirectional Level Shifter, Push-Pull Mode**
**Electrical Characteristics**

 All test conditions:  $V_{CCA} = 1.2\text{ V to }3.6\text{ V}$ ,  $V_{CCB} = 1.65\text{ V to }5.5\text{ V}$ ,  $V_{CCA} \leq V_{CCB}$ ,  $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ , unless otherwise noted.

Parameter		Conditions	$V_{CCA}$	$V_{CCB}$	Min	Typ	Max	Unit
$V_{OHA}$	Port A High-level Output Voltage	$I_{OH} = -20\ \mu\text{A}$ , $T_A = 25^\circ\text{C}$	1.2 V	1.65 V to 5.5 V		1.1		
		$I_{OH} = -20\ \mu\text{A}$	1.4 V to 3.6 V	1.65 V to 5.5 V	$V_{CCA} - 0.4$			V
$V_{OLA}$	Port A Low-level Output Voltage	$I_{OL} = 20\ \mu\text{A}$ , $T_A = 25^\circ\text{C}$	1.2 V	1.65 V to 5.5 V		0.09		
		$I_{OL} = 20\ \mu\text{A}$	1.4 V to 3.6 V	1.65 V to 5.5 V			0.4	V
$V_{OHB}$	Port B High-level Output Voltage	$I_{OH} = -20\ \mu\text{A}$	1.2 V to 3.6 V	1.65 V to 5.5 V	$V_{CCB} - 0.4$			V
$V_{OLB}$	Port B Low-level Output Voltage	$I_{OL} = 20\ \mu\text{A}$	1.2 V to 3.6 V	1.65 V to 5.5 V			0.4	V
$I_I$	Input Leakage Current	OE: $V_I = V_{CCI}$ or GND	1.2 V to 3.6 V	1.65 V to 5.5 V	-5		5	$\mu\text{A}$
$I_{OZ}$	High-impedance State Output Current	Port A or B, OE = GND	1.2 V to 3.6 V	1.65 V to 5.5 V	-10		10	$\mu\text{A}$
$I_{OFF}$	OFF Current	A port: $V_I$ or $V_O = 0\text{ V to }3.6\text{ V}$	0 V	0 V to 5.5 V	-10		10	$\mu\text{A}$
		B port: $V_I$ or $V_O = 0\text{ V to }5.5\text{ V}$	0 V to 3.6 V	0 V	-10		10	$\mu\text{A}$
$I_{CCA}$	Quiescent Supply Current for $V_{CCA}$	$V_I = V_{CCI}$ or GND, $I_O = 0\text{ V}$ , OE = $V_{CCA}$ , $T_A = 25^\circ\text{C}$	1.2 V	1.65 V to 5.5 V		0.8		
		$V_I = V_{CCI}$ or GND, $I_O = 0\text{ V}$ , OE = $V_{CCA}$	1.4 V to 3.6 V	1.65 V to 5.5 V			40	$\mu\text{A}$
			3.6 V	0			30	
			0	5.5 V	-30			
$I_{CCB}$	Quiescent Supply Current for $V_{CCB}$	$V_I = V_{CCI}$ or GND, $I_O = 0\text{ V}$ , OE = $V_{CCA}$ , $T_A = 25^\circ\text{C}$	1.2 V	1.65 V to 5.5 V		6.8		
		$V_I = V_{CCI}$ or GND, $I_O = 0\text{ V}$ , OE = $V_{CCA}$	1.4 V to 3.6 V	1.65 V to 5.5 V			40	$\mu\text{A}$
			3.6 V	0	-30			
			0	5.5 V			30	
$I_{CCA}^+$ $I_{CCB}$	Combined Supply Current	$V_I = V_{CCI}$ or GND, $I_O = 0\text{ V}$ , OE = $V_{CCA}$ , $T_A = 25^\circ\text{C}$	1.2 V	1.65 V to 5.5 V		7		
		$V_I = V_{CCI}$ or GND, $I_O = 0\text{ V}$ , OE = $V_{CCA}$	1.4 V to 3.6 V	1.65 V to 5.5 V			80	$\mu\text{A}$

**8-bit Bidirectional Level Shifter, Push-Pull Mode**

Parameter		Conditions	V <sub>CCA</sub>	V <sub>CCB</sub>	Min	Typ	Max	Unit
I <sub>CCZA</sub>	High-Impedance State V <sub>CCA</sub> Supply Current	V <sub>I</sub> = V <sub>CC1</sub> or GND, I <sub>O</sub> = 0 V, OE = GND, T <sub>A</sub> = 25°C	1.2 V	1.65 V to 5.5 V		0.8		
		V <sub>I</sub> = V <sub>CC1</sub> or GND, I <sub>O</sub> = 0 V, OE = GND	1.4 V to 3.6 V	1.65 V to 5.5 V			30	μA
I <sub>CCZB</sub>	High-Impedance State V <sub>CCB</sub> Supply Current	V <sub>I</sub> = V <sub>CC1</sub> or GND, I <sub>O</sub> = 0 V, OE = GND, T <sub>A</sub> = 25°C	1.2 V	1.65 V to 5.5 V		6.6		
		V <sub>I</sub> = V <sub>CC1</sub> or GND, I <sub>O</sub> = 0 V, OE = GND	1.4 V to 3.6 V	1.65 V to 5.5 V			30	μA
C <sub>I</sub>	Input Capacitance <sup>(1)</sup>	OE	3.3 V	3.3 V		5	10	pF
C <sub>IO</sub>	Input/Output Capacitance <sup>(1)</sup>	Port A	3.3 V	3.3 V		7	10	pF
		Port B	3.3 V	3.3 V		10	15	pF

(1) Test data based on bench tests and design simulation, NOT test in production.

**8-bit Bidirectional Level Shifter, Push-Pull Mode**
**AC Timing Requirements — VCCA = 1.2 V**

All test conditions: V<sub>CCA</sub> = 1.2 V, T<sub>A</sub> = 25°C, unless otherwise noted.

The data is based on bench test and design simulation, not test in production.

Parameter		Condition	V <sub>CCB</sub>	Min	Typ	Max	Unit
f <sub>D</sub>	Data Rate	Push-pull mode	1.65 V to 1.95 V			20	Mbps
			2.3 V to 2.7 V			20	Mbps
			3.0 V to 3.6 V			20	Mbps
			4.5 V to 5.5 V			20	Mbps
t <sub>w</sub>	Pulse Duration	Push-pull mode	1.65 V to 1.95 V	50			ns
			2.3 V to 2.7 V	50			ns
			3.0 V to 3.6 V	50			ns
			4.5 V to 5.5 V	50			ns
t <sub>PHL</sub>	Propagation Delay (High-to-Low)	A-to-B, push-pull driving	1.65 V to 1.95 V		10.1		ns
			2.3 V to 2.7 V		7.8		ns
			3.0 V to 3.6 V		7.2		ns
			4.5 V to 5.5 V		7		ns
t <sub>PLH</sub>	Propagation Delay (Low-to-High)	A-to-B, push-pull driving	1.65 V to 1.95 V		9.5		ns
			2.3 V to 2.7 V		6.9		ns
			3.0 V to 3.6 V		6		ns
			4.5 V to 5.5 V		5.5		ns
t <sub>PHL</sub>	Propagation Delay (High-to-Low)	B-to-A, push-pull driving	1.65 V to 1.95 V		11		ns
			2.3 V to 2.7 V		8.9		ns
			3.0 V to 3.6 V		8.2		ns
			4.5 V to 5.5 V		7.7		ns
t <sub>PLH</sub>	Propagation Delay (Low-to-High)	B-to-A, push-pull driving	1.65 V to 1.95 V		10.3		ns
			2.3 V to 2.7 V		8.9		ns
			3.0 V to 3.6 V		8.5		ns
			4.5 V to 5.5 V		8.1		ns
t <sub>en</sub>	Enable Time	OE-to-A or B, push-pull driving	1.65 V to 5.5 V		80		ns
t <sub>dis</sub>	Disable Time	OE-to-A or B, push-pull driving	1.65 V to 5.5 V		170		ns

**8-bit Bidirectional Level Shifter, Push-Pull Mode**

Parameter		Condition	V <sub>CCB</sub>	Min	Typ	Max	Unit
tr <sub>A</sub>	Input Rise Time	A-port rise time, push-pull driving	1.65 V to 1.95 V		4.6		ns
			2.3 V to 2.7 V		4.3		ns
			3.0 V to 3.6 V		4.3		ns
			4.5 V to 5.5 V		4.3		ns
tr <sub>B</sub>	Input Rise Time	B-port rise time, push-pull driving	1.65 V to 1.95 V		2.3		ns
			2.3 V to 2.7 V		1.7		ns
			3.0 V to 3.6 V		1.5		ns
			4.5 V to 5.5 V		1.3		ns
tf <sub>A</sub>	Input Fall Time	A-port fall time, push-pull driving	1.65 V to 1.95 V		3.4		ns
			2.3 V to 2.7 V		3.3		ns
			3.0 V to 3.6 V		3.1		ns
			4.5 V to 5.5 V		3.6		ns
tf <sub>B</sub>	Input Fall Time	B-port fall time, push-pull driving	1.65 V to 1.95 V		1.9		ns
			2.3 V to 2.7 V		1.5		ns
			3.0 V to 3.6 V		1.3		ns
			4.5 V to 5.5 V		1.2		ns
t <sub>sk(O)</sub>	Skew (time), Output	Channel-to-channel skew, push-pull driving	1.65 V to 5.5 V			1	ns

**8-bit Bidirectional Level Shifter, Push-Pull Mode**
**AC Timing Requirements — V<sub>CCA</sub> = 1.5 V**

All test conditions: V<sub>CCA</sub> = 1.4 V to 1.6 V, T<sub>A</sub> = -40°C to +125°C, unless otherwise noted.

The data is based on bench test and design simulation, not test in production.

Parameter		Condition	V <sub>CCB</sub>	Min	Typ	Max	Unit
f <sub>D</sub>	Data Rate	Push-pull mode	1.65 V to 1.95 V			35	Mbps
			2.3 V to 2.7 V			40	Mbps
			3.0 V to 3.6 V			45	Mbps
			4.5 V to 5.5 V			45	Mbps
t <sub>w</sub>	Pulse Duration	Push-pull mode	1.65 V to 1.95 V	33.3			ns
			2.3 V to 2.7 V	25			ns
			3.0 V to 3.6 V	22.2			ns
			4.5 V to 5.5 V	22.2			ns
t <sub>PHL</sub>	Propagation Delay (High-to-Low)	A-to-B, or B-to-A, push-pull driving	1.65 V to 1.95 V			21	ns
			2.3 V to 2.7 V			15	ns
			3.0 V to 3.6 V			15	ns
			4.5 V to 5.5 V			15	ns
t <sub>PLH</sub>	Propagation Delay (Low-to-High)	A-to-B, or B-to-A, push-pull driving	1.65 V to 1.95 V			20	ns
			2.3 V to 2.7 V			15	ns
			3.0 V to 3.6 V			15	ns
			4.5 V to 5.5 V			15	ns
t <sub>en</sub>	Enable Time	OE-to-A or B, push-pull driving	1.65 V to 5.5 V			150	ns
t <sub>dis</sub>	Disable Time	OE-to-A or B, push-pull driving	1.65 V to 5.5 V			500	ns
t <sub>rA</sub>	Input Rise Time	A-port rise time, push-pull driving	1.65 V to 1.95 V			20	ns
			2.3 V to 2.7 V	1.6		15	ns
			3.0 V to 3.6 V	1.4		15	ns
			4.5 V to 5.5 V	1.4		15	ns
t <sub>rB</sub>	Input Rise Time	B-port rise time, push-pull driving	1.65 V to 1.95 V	1.3		20	ns
			2.3 V to 2.7 V	1.3		15	ns
			3.0 V to 3.6 V	0.9		15	ns
			4.5 V to 5.5 V	0.7		15	ns

## 8-bit Bidirectional Level Shifter, Push-Pull Mode

Parameter		Condition	V <sub>CCB</sub>	Min	Typ	Max	Unit
t <sub>fA</sub>	Input Fall Time	A-port fall time, push-pull driving	1.65 V to 1.95 V	1		20	ns
			2.3 V to 2.7 V	1.6		20	ns
			3.0 V to 3.6 V	1.4		15	ns
			4.5 V to 5.5 V	1.4		15	ns
t <sub>fB</sub>	Input Fall Time	B-port fall time, push-pull driving	1.65 V to 1.95 V	1.3		20	ns
			2.3 V to 2.7 V	1.3		15	ns
			3.0 V to 3.6 V	0.9		10	ns
			4.5 V to 5.5 V	0.7		10	ns
t <sub>sk(O)</sub>	Skew (time), Output	Channel-to-channel skew, push-pull driving	1.65 V to 5.5 V			1	ns

**8-bit Bidirectional Level Shifter, Push-Pull Mode**
**AC Timing Requirements — VCCA = 1.8 V**

All test conditions: V<sub>CCA</sub> = 1.65 V to 1.95 V, T<sub>A</sub> = -40°C to +125°C, unless otherwise noted.

The data is based on bench test and design simulation, not test in production.

Parameter		Condition	V <sub>CCB</sub>	Min	Typ	Max	Unit
f <sub>D</sub>	Data Rate	Push-pull mode	1.65 V to 1.95 V			35	Mbps
			2.3 V to 2.7 V			50	Mbps
			3.0 V to 3.6 V			60	Mbps
			4.5 V to 5.5 V			60	Mbps
t <sub>w</sub>	Pulse Duration	Push-pull mode	1.65 V to 1.95 V	28.6			ns
			2.3 V to 2.7 V	20			ns
			3.0 V to 3.6 V	16.7			ns
			4.5 V to 5.5 V	16.7			ns
t <sub>PHL</sub>	Propagation Delay (High-to-Low)	A-to-B, or B-to-A, push-pull driving	1.65 V to 1.95 V			20	ns
			2.3 V to 2.7 V			20	ns
			3.0 V to 3.6 V			15	ns
			4.5 V to 5.5 V			15	ns
t <sub>PLH</sub>	Propagation Delay (Low-to-High)	A-to-B, or B-to-A, push-pull driving	1.65 V to 1.95 V			20	ns
			2.3 V to 2.7 V			20	ns
			3.0 V to 3.6 V			15	ns
			4.5 V to 5.5 V			15	ns
t <sub>en</sub>	Enable Time	OE-to-A or B, push-pull driving	1.65 V to 5.5 V			100	ns
t <sub>dis</sub>	Disable Time	OE-to-A or B, push-pull driving	1.65 V to 5.5 V			410	ns
t <sub>rA</sub>	Input Rise Time	A-port rise time, push-pull driving	1.65 V to 1.95 V			20	ns
			2.3 V to 2.7 V	1.6		20	ns
			3.0 V to 3.6 V	1.4		15	ns
			4.5 V to 5.5 V	1.4		15	ns
t <sub>rB</sub>	Input Rise Time	B-port rise time, push-pull driving	1.65 V to 1.95 V	1.3		22	ns
			2.3 V to 2.7 V	1.3		20	ns
			3.0 V to 3.6 V	0.9		15	ns
			4.5 V to 5.5 V	0.7		15	ns

**8-bit Bidirectional Level Shifter, Push-Pull Mode**

Parameter		Condition	V <sub>CCB</sub>	Min	Typ	Max	Unit
t <sub>fA</sub>	Input Fall Time	A-port fall time, push-pull driving	1.65 V to 1.95 V	1		20	ns
			2.3 V to 2.7 V	1.6		20	ns
			3.0 V to 3.6 V	1.4		15	ns
			4.5 V to 5.5 V	1.4		15	ns
t <sub>fB</sub>	Input Fall Time	B-port fall time, push-pull driving	1.65 V to 1.95 V	1.3		20	ns
			2.3 V to 2.7 V	1.3		15	ns
			3.0 V to 3.6 V	0.9		10	ns
			4.5 V to 5.5 V	0.7		10	ns
t <sub>sk(O)</sub>	Skew (time), Output	Channel-to-channel skew, push-pull driving	1.65 V to 5.5 V			1	ns

**8-bit Bidirectional Level Shifter, Push-Pull Mode**
**AC Timing Requirements — VCCA = 2.5 V**

All test conditions: V<sub>CCA</sub> = 2.3 V to 2.7 V, T<sub>A</sub> = -40°C to +125°C, unless otherwise noted.

The data is based on bench test and design simulation, not test in production.

Parameter		Condition	VCCB	Min	Typ	Max	Unit
f <sub>D</sub>	Data Rate	Push-pull mode	2.3 V to 2.7 V			65	Mbps
			3.0 V to 3.6 V			80	Mbps
			4.5 V to 5.5 V			90	Mbps
t <sub>w</sub>	Pulse Duration	Push-pull mode	2.3 V to 2.7 V	15.4			ns
			3.0 V to 3.6 V	12.5			ns
			4.5 V to 5.5 V	11.1			ns
t <sub>PHL</sub>	Propagation Delay (High-to-Low)	A-to-B, or B-to-A, push-pull driving	2.3 V to 2.7 V			15	ns
			3.0 V to 3.6 V			15	ns
			4.5 V to 5.5 V			15	ns
t <sub>PLH</sub>	Propagation Delay (Low-to-High)	A-to-B, or B-to-A, push-pull driving	2.3 V to 2.7 V			15	ns
			3.0 V to 3.6 V			15	ns
			4.5 V to 5.5 V			15	ns
t <sub>en</sub>	Enable Time	OE-to-A or B, push-pull driving	2.3 V to 5.5 V			100	ns
t <sub>dis</sub>	Disable Time	OE-to-A or B, push-pull driving	2.3 V to 5.5 V			400	ns
tr <sub>A</sub>	Input Rise Time	A-port rise time, push-pull driving	2.3 V to 2.7 V	1.9		15	ns
			3.0 V to 3.6 V	1.6		15	ns
			4.5 V to 5.5 V	1.5		15	ns
tr <sub>B</sub>	Input Rise Time	B-port rise time, push-pull driving	2.3 V to 2.7 V	1.7		15	ns
			3.0 V to 3.6 V	1.3		10	ns
			4.5 V to 5.5 V	0.9		10	ns
tf <sub>A</sub>	Input Fall Time	A-port fall time, push-pull driving	2.3 V to 2.7 V	1.5		10	ns
			3.0 V to 3.6 V	1.2		10	ns
			4.5 V to 5.5 V	1.3		10	ns
tf <sub>B</sub>	Input Fall Time	B-port fall time, push-pull driving	2.3 V to 2.7 V	1.4		10	ns
			3.0 V to 3.6 V	0.9		10	ns
			4.5 V to 5.5 V	0.7		10	ns
t <sub>sk(O)</sub>	Skew (time), Output	Channel-to-channel skew, push-pull driving	2.3 V to 5.5 V			1	ns

**8-bit Bidirectional Level Shifter, Push-Pull Mode**
**AC Timing Requirements — VCCA = 3.3 V**

All test conditions: V<sub>CCA</sub> = 3.0 V to 3.6 V, T<sub>A</sub> = -40°C to +125°C, unless otherwise noted.

The data is based on bench test and design simulation, not test in production.

Parameter		Condition	V <sub>CCB</sub>	Min	Typ	Max	Unit
f <sub>D</sub>	Data Rate	Push-pull mode	3.0 V to 3.6 V			90	Mbps
		Push-pull mode	4.5 V to 5.5 V			100	Mbps
t <sub>w</sub>	Pulse Duration	Push-pull mode	3.0 V to 3.6 V	11.1			ns
		Push-pull mode	4.5 V to 5.5 V	10			ns
t <sub>PHL</sub>	Propagation Delay (High-to-Low)	A-to-B, or B-to-A, push-pull driving	3.0 V to 3.6 V			20	ns
			4.5 V to 5.5 V			15	ns
t <sub>PLH</sub>	Propagation Delay (Low-to-High)	A-to-B, or B-to-A, push-pull driving	3.0 V to 3.6 V			20	ns
			4.5 V to 5.5 V			15	ns
t <sub>en</sub>	Enable Time	OE-to-A or B, push-pull driving	3.0 V to 5.5 V			100	ns
t <sub>dis</sub>	Disable Time	OE-to-A or B, push-pull driving	3.0 V to 3.6 V			410	ns
tr <sub>A</sub>	Input Rise Time	A-port rise time, push-pull driving	3.0 V to 3.6 V	2.1		15	ns
			4.5 V to 5.5 V	1.4		15	ns
tr <sub>B</sub>	Input Rise Time	B-port rise time, push-pull driving	3.0 V to 3.6 V	2		15	ns
			4.5 V to 5.5 V	0.7		10	ns
tf <sub>A</sub>	Input Fall Time	A-port fall time, push-pull driving	3.0 V to 3.6 V	1.4		10	ns
			4.5 V to 5.5 V	1.2		10	ns
tf <sub>B</sub>	Input Fall Time	B-port fall time, push-pull driving	3.0 V to 3.6 V	1.3		10	ns
			4.5 V to 5.5 V	1.1		10	ns
t <sub>SK(O)</sub>	Skew (time), Output	Channel-to-channel skew, push-pull driving	3.0 V to 5.5 V			1	ns

8-bit Bidirectional Level Shifter, Push-Pull Mode

Parameter Measurement Waveforms

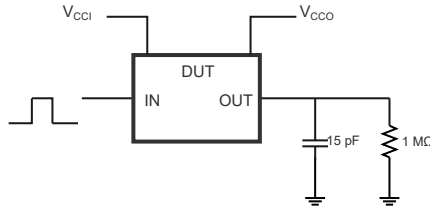


Figure 1. Timing Measurement Load Circuit of Push-Pull Driver

Test	S1
$t_{PZL}/t_{PLZ}$	$2 \times V_{CC0}$
$t_{PHZ}/t_{PZH}$	Open

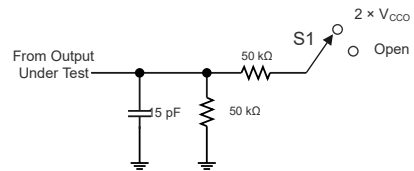


Figure 2. Load Circuit for Enable and Disable Time Measurement

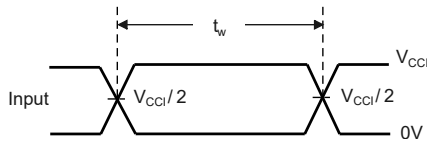


Figure 3. Pulse Duration

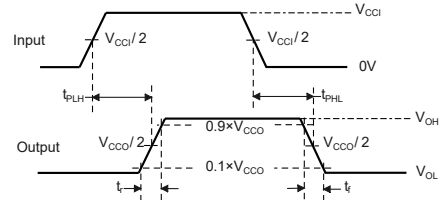


Figure 4. Propagation Delay Times

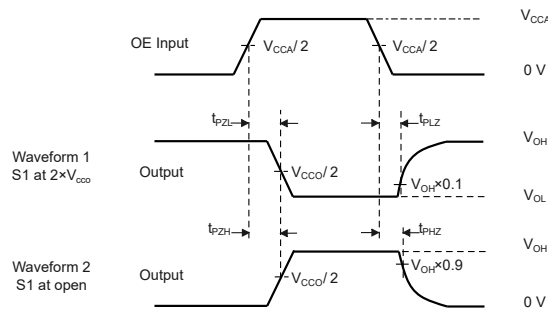



Figure 5. Enable and Disable Times

## Detailed Description

### Overview

The TPT20208Q device is an 8-bit level shifter, with an enable (OE) input and can work within the  $V_{CCA}$  range from 1.2 V to 3.6 V and the  $V_{CCB}$  range from 1.65 V to 5.5 V.  $V_{CCA}$  must be less than or equal to  $V_{CCB}$ . The TPT20208Q supports bidirectional voltage translation among 1.2 V, 1.5 V, 1.8 V, 2.5 V, 3.3 V, and 5 V. The A1~8 I/Os are connected to the B1~8 I/Os, which allows bidirectional data flow between ports. If OE is low, the translator switch is off, and a high-impedance state exists between ports to isolate both sides. The OE input circuit is internally connected to  $V_{CCA}$ . 8-bit bidirectional buffer isolates capacitance and allows 15 pF on either side of the device to support 100 Mbps speeds in Push-Pull mode at 3.3 V  $V_{CCA}$  and 5 V  $V_{CCB}$ .

### Functional Block Diagram

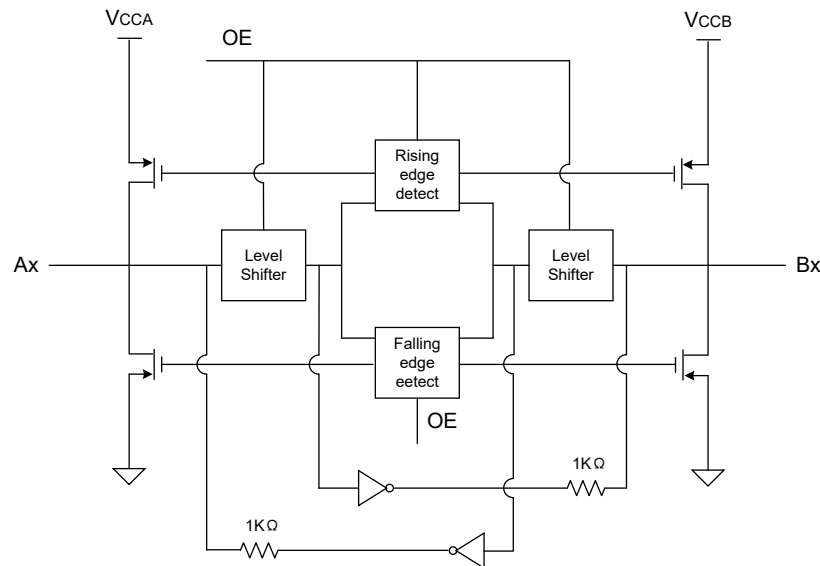


**Figure 6. Functional Block Diagram**

## Feature Description

### Input Driver Requirements

Typical  $I_{IN}$  vs  $V_{IN}$  characteristics of the TPT20208Q are shown in [Figure 7](#). For proper operation, the device driving the data I/Os of the TPT20208Q must have a drive strength of at least  $\pm 3$  mA.

8-bit Bidirectional Level Shifter, Push-Pull Mode

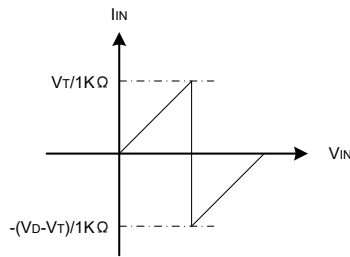

V<sub>T</sub>: input threshold voltage of the TPT20208Q (typically V<sub>CC1</sub>/2).  
V<sub>D</sub>: supply voltage of the external driver.

Figure 7. Typical I<sub>IN</sub> vs V<sub>IN</sub> Curve

**Power Up**

During operation, make sure that V<sub>CCA</sub> ≤ V<sub>CCB</sub> at all times. During power-up, even if V<sub>CCA</sub> ≥ V<sub>CCB</sub>, it will not damage the device, so there is no power-on sequence requirement, any power supply can be ramped up first.

**Enable (OE)**

The OE pin is active-HIGH, with switching thresholds referenced to V<sub>CCA</sub>. When driven LOW, OE disables the TPT20208Q and places all I/Os in a high-impedance state. The t<sub>dis</sub> parameter indicates the delay time between the OE pin going low and I/Os outputs entering the high-impedance state. Then Enable time ten indicates the period of time that the user operates the one-shot circuit after the OE pin goes high.

To ensure the high-impedance state during power-up or power-down, the OE pin should be connected to GND through a pull-down resistor; the minimum value of this resistor is determined by the driver's current-sourcing capability.

Table 2. Device Function Table

Input OE	Translator Function
H	A <sub>x</sub> = B <sub>x</sub>
L	A <sub>x</sub> is disconnected to B <sub>x</sub> , high-impedance

(1) The OE pin should be pulled up to V<sub>CCA</sub> or pulled down to GND, it must not be left floating.

## Application and Implementation

Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

## Application Information

The TPT20208Q device is an 8-bit level shifter, with an enable (OE) input and can work within the  $V_{CCA}$  range from 1.2 V to 3.6 V and the  $V_{CCB}$  range from 1.65 V to 5.5 V.  $V_{CCA}$  must be less than or equal to  $V_{CCB}$ . The TPT20208Q supports bidirectional voltage translation between 1.2 V, 1.5 V, 1.8 V, 2.5 V, 3.3 V, and 5 V. The A1~8 I/Os are connected to the B1~8 I/Os, which allows bidirectional data flow between ports. If OE is low, the translator switch is off, and a high-impedance state exists between ports to isolate both sides. The OE input circuit is internally connected to  $V_{CCA}$ .

- Servers/Storages
- Routers (Telecom Switching Equipment)
- Personal Computers/Consumer Handsets
- Industrial Automation

## Typical Application

A typical application is shown in Figure 8. The TPT20208Q device can be used in level-translation applications for interfacing devices or systems operating at different interface voltages with one another. The TPT20208Q device is ideal for use in applications where a push-pull driver is connected to the data I/Os.

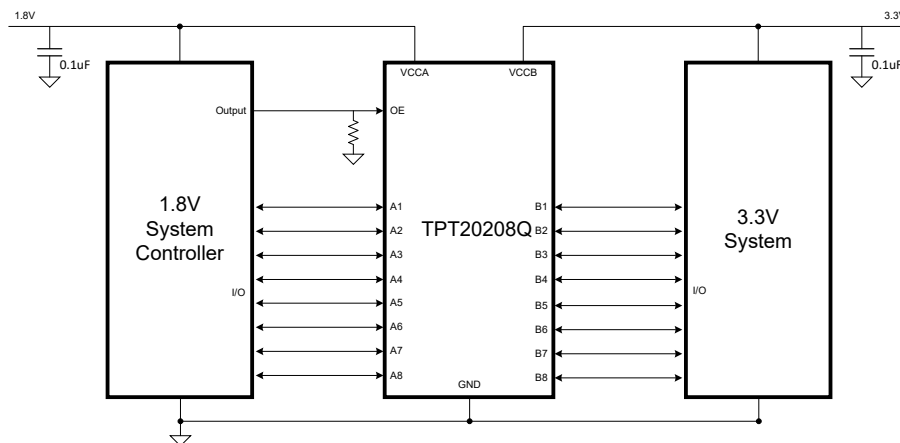


Figure 8. Typical Application Circuit

# 8-bit Bidirectional Level Shifter, Push-Pull Mode

## Layout

### Layout Example

Reflections and matching are closely related to loop antenna theory but different enough to warrant their own discussion. When a PCB trace turns a corner at a 90° angle, a reflection can occur. This is primarily due to the change in the width of the trace. At the apex of the turn, the trace width is increased to 1.414 times its width. This change in width upsets the transmission line characteristics, especially the distributed capacitance and self-inductance of the trace, thus resulting in the reflection. Not all PCB traces can be straight, so they have to turn corners. Below are progressively better techniques for rounding corners. Only the last example (BEST) maintains constant trace width and minimizes reflections.

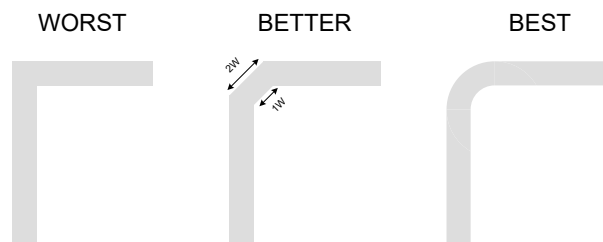


Figure 9. Trace Example

Route high-speed signals using a minimum of vias and corners which reduces signal reflections and impedance changes. When a via must be used, increase the clearance size around it to minimize its capacitance. Each via introduces discontinuities in the signal's transmission line and increases the chance of picking up interference from the other layers of the board. Be careful when designing test points, through-hole pins are not recommended at high frequencies.


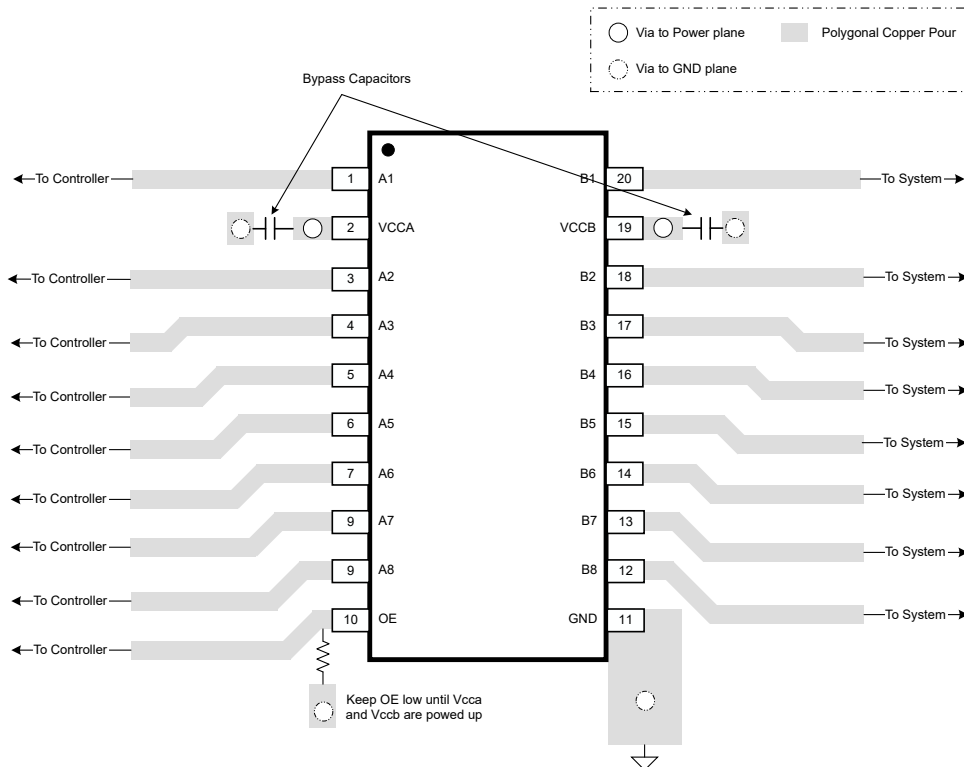


Figure 10. Layout Example


Tape and Reel Information

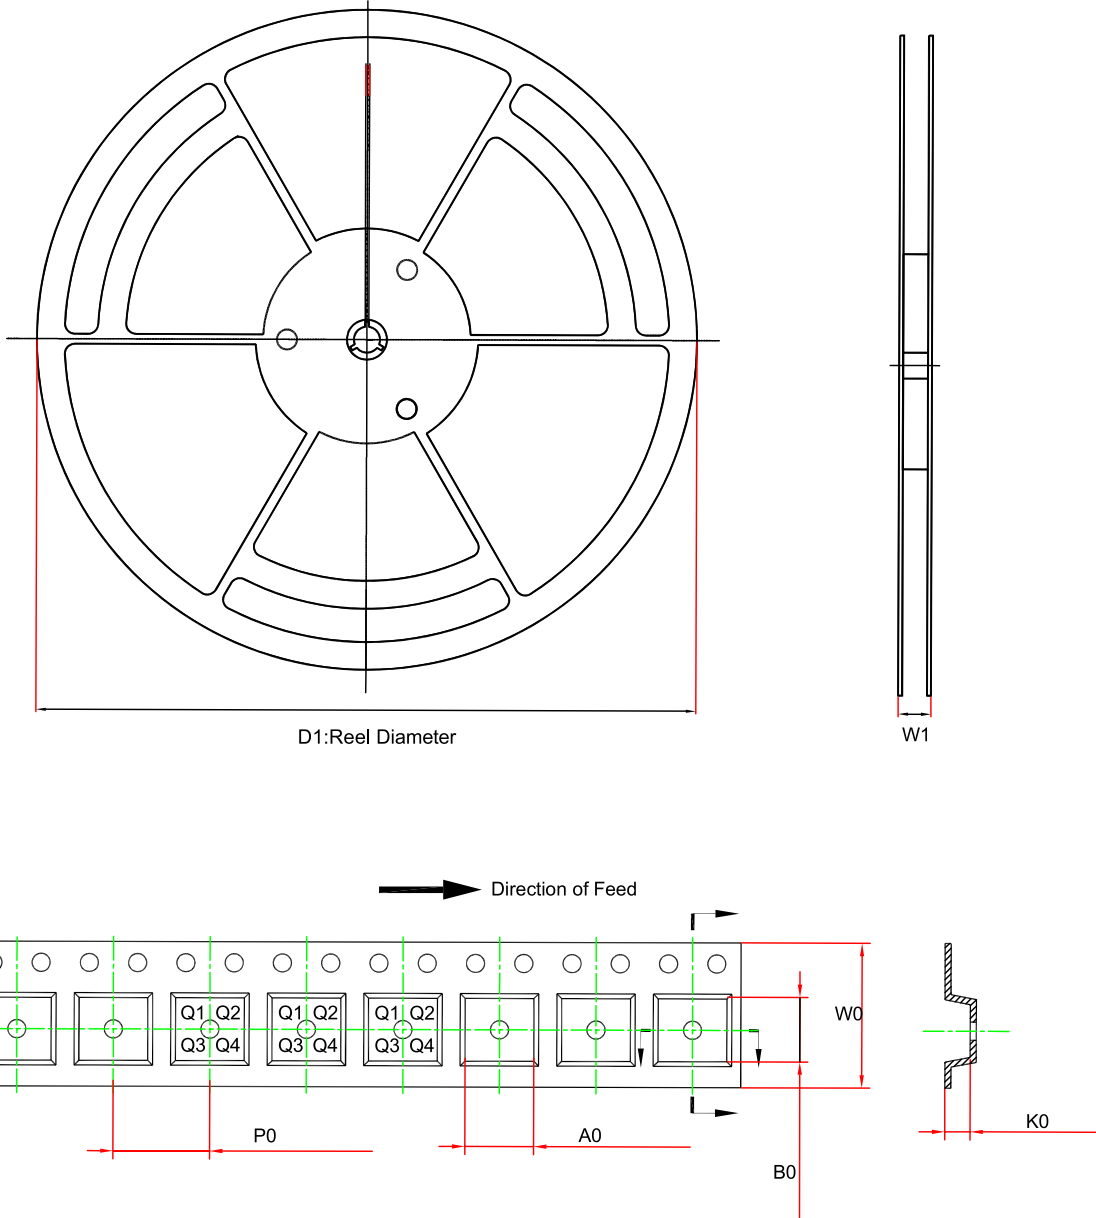

Order Number	Package	D1 (mm)	A0 (mm)	K0 (mm)	W0 (mm)	W1 (mm)	B0 (mm)	P0 (mm)	Pin1 Quadrant
TPT20208Q-TS4R	TSSOP20	330	6.8	1.7	12.0	17.6	6.85	8.0	Q1

Package Outline Dimensions

TSSOP20

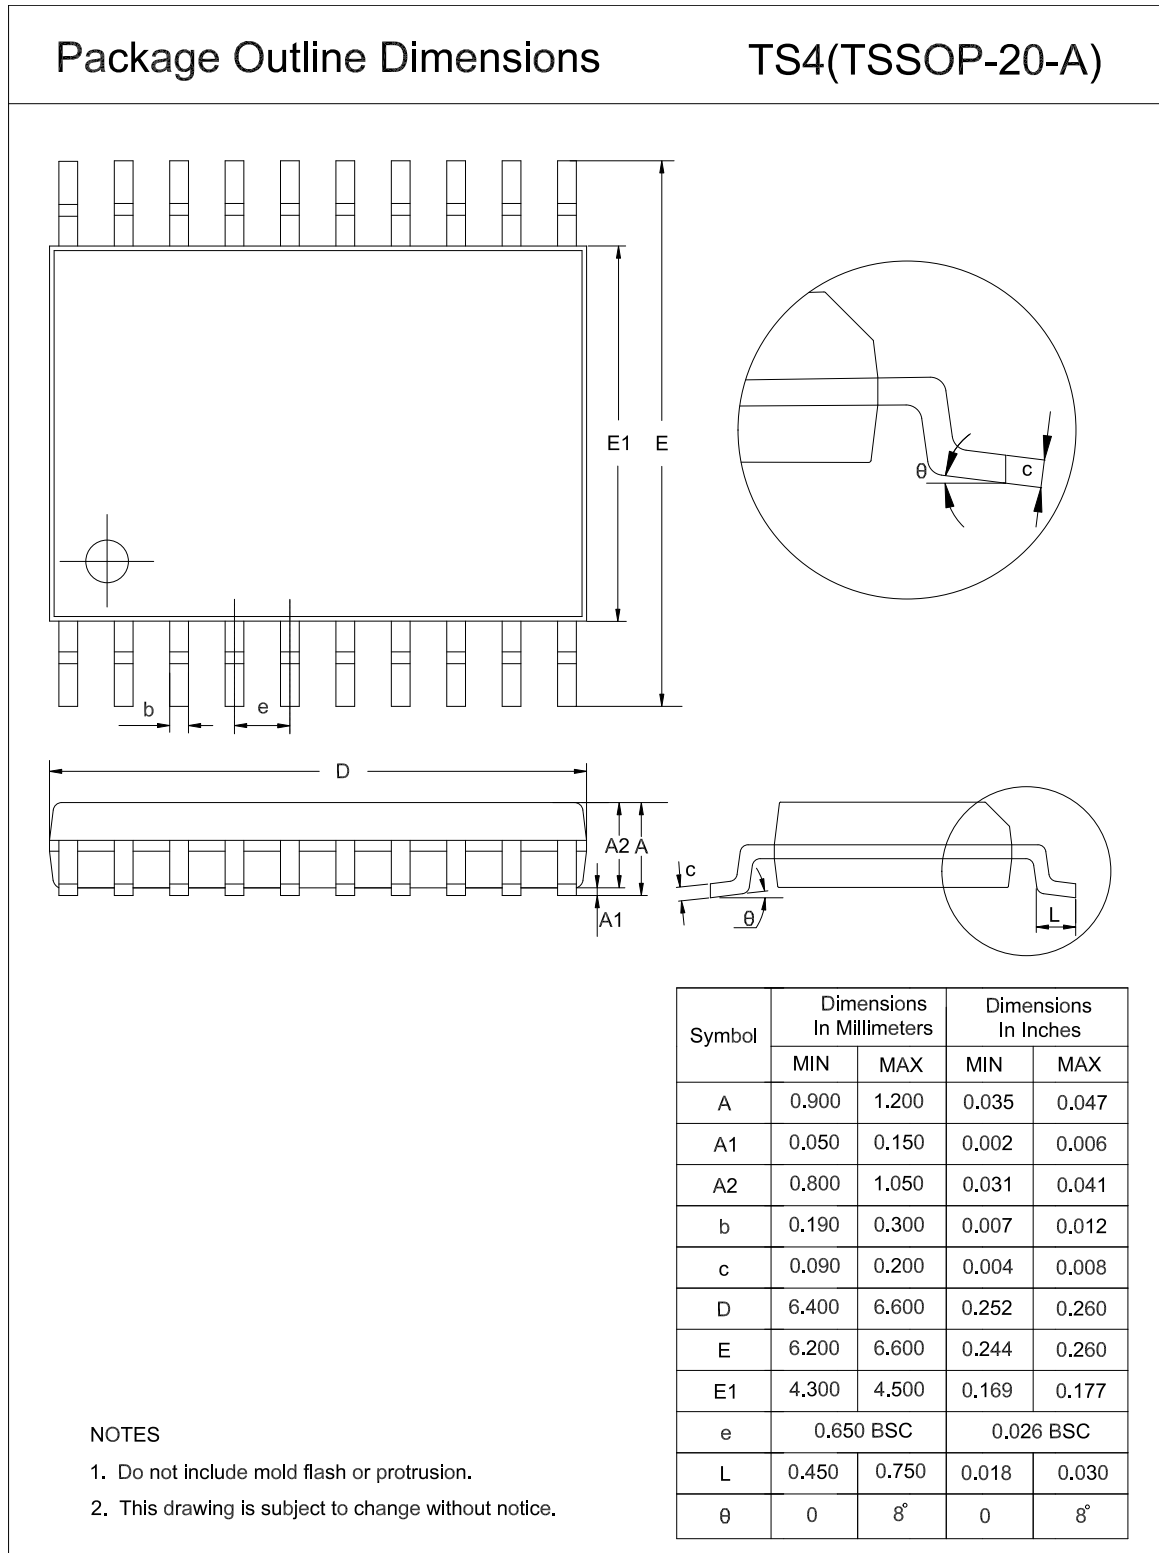

## Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPT20208Q-TS4R-S	-40 to 125°C	TSSOP20	0208Q	MSL3	Tape and Reel, 4000	Green

**Green:** 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

## IMPORTANT NOTICE AND DISCLAIMER

**Copyright**© 3PEAK 2012-2026. All rights reserved.

**Trademarks.** Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

**Performance Information.** Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

**Disclaimer.** 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.

This page intentionally left blank