

Features

- Exceeds Requirements of EIA-485 Standard
- Hot Plug Circuitry – Tx and Rx Outputs Remain Three-State during Power-up/Power-down
- Data Rate: 500 Kbps
- Up to 256 Nodes on a Bus (1/8 Unit Load) at 500 kbps
- Full Fail-Safe Receiver (Open, Short, and Terminated)
- Wide Supply Voltage: 3 V to 5.5 V
- Bus-Pin Protection:
 - ±18-kV HBM ESD
 - ±15-kV IEC61000-4-2 Contact Discharge
 - ±15-kV IEC61000-4-2 Air Discharge
- Operation Temperature Range: -40°C to 125°C

Applications

- Motor Drives
- Industrial Control
- Communication Infrastructure

Description

The TPT487 is a series of IEC 61000 ESD-protected, 3-V to 5.5-V powered transceivers that meet the RS-485 and RS-422 standards for balanced communication.

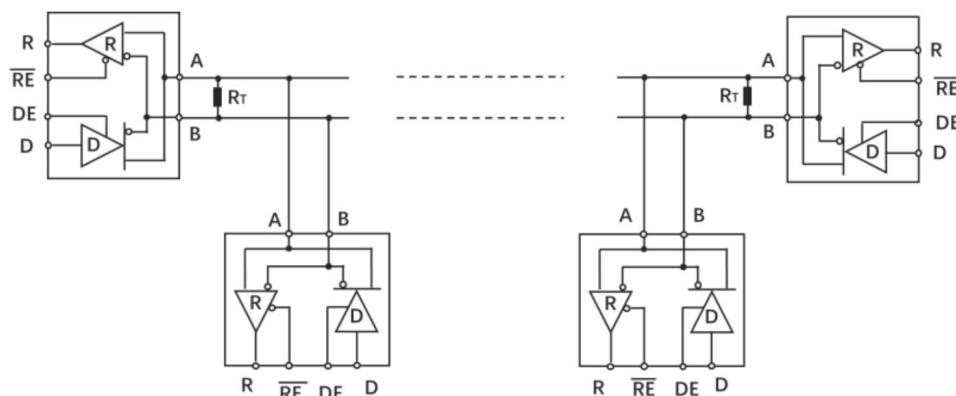
Transmitters in this family deliver exceptional differential output voltages into the RS-485 required 54-Ω load. These 500-kbps devices have very low bus currents, so they present a true "1/8 unit load" to the RS-485 bus. This allows up to 256 transceivers on the network without using repeaters. Receiver (Rx) inputs feature a "Full Fail-Safe" design, which ensures a logic-high Rx output if Rx inputs are floating, shorted, or on a terminated but undriven bus.

The TPT487 transceivers are designed for half-duplex RS-485, and support the SOP8, MSOP8, and DFN3X3-8 packages, which are characterized from -40°C to 125°C.

Device Table

Part	Duplex	Enable	Data Rate	Nodes
TPT487	Half	Yes	500 Kbps	256

Typical Application Circuit



TPT487 Network

Table of Contents

Features.....	1
Applications.....	1
Description.....	1
Device Table.....	1
Typical Application Circuit.....	1
Revision History.....	3
Pin Configuration and Functions.....	4
Functional Table.....	5
Specifications.....	6
Absolute Maximum Ratings ⁽¹⁾	6
Recommended Operating Conditions.....	6
ESD, Electrostatic Discharge Protection.....	7
Thermal Information.....	7
Electrical Characteristics.....	8
Switching Characteristics.....	10
Test Circuits and Waveforms.....	11
Detailed Description.....	14
Functional Block Diagram.....	14
Application and Implementation.....	15
Typical Application.....	15
Tape and Reel Information.....	16
Package Outline Dimensions.....	17
SOP8.....	17
MSOP8.....	18
DFN3X3-8.....	19
Order Information.....	20
IMPORTANT NOTICE AND DISCLAIMER.....	21

Revision History

Date	Revision	Notes
2019-01-14	Rev.Pre.0	Initial version.
2019-06-15	Rev.Pre.1	Updated the package information.
2019-09-17	Rev.A.0	Released version.
2020-03-20	Rev.A.1	Updated the Absolute Maximum Ratings.
2023-05-10	Rev.A.2	Added the Thermal Information.
2024-12-24	Rev.A.3	Updated to a new datasheet format. Updated the POD. Added Tape and Reel Information.
2025-05-29	Rev.A.4	Updated E-pad Information

Pin Configuration and Functions

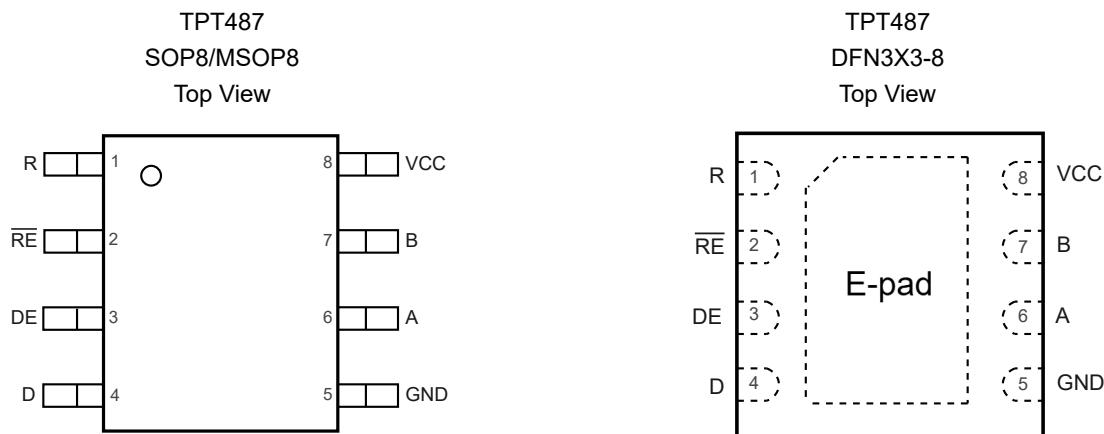


Table 1. Pin Functions

Pin No.	Name	I/O	Description
1	R	Digital Output	Receiver output.
2	\overline{RE}	Digital Input	Receiver output enable.
3	DE	Digital Input	Driver output enable.
4	D	Digital Input	Driver input.
5	GND	Ground	Ground.
6	A	Bus Input/Output	Non-inverting receiver input A and non-inverting driver output A.
7	B	Bus Input/Output	Inverting receiver input B and inverted driver output B.
8	Vcc	Power	Power supply.
	E-pad		Thermal pad, connect to GND for optimal thermal performance

Functional Table

Driver Function Table

Input	Enable	Outputs	Outputs	Description
D	DE	A	B	
H	H	H	L	Actively drive bus High
L	H	L	H	Actively drive bus Low
X	L	Z	Z	Driver disabled
X	OPEN	Z	Z	Driver disabled by default
OPEN	H	H	L	Actively drive bus High by default

Receiver Function Table

Input	Input	Output	Description
A-B	RE	R	
> -50 mV	L	H	Receive valid bus High
-200 mV < Input < -50 mV	L	?	Indeterminate bus state
< -200 mV	L	L	Receive valid bus Low
X	H	Z	Receiver disabled
X	Open	Z	Receiver disabled by default
Open	L	H	Fail-safe high output
Short	L	H	Fail-safe high output
Idle (Terminated)	L	H	Fail-safe high output

(1) X = don't care.

(2) Z = high impedance.

Specifications

Absolute Maximum Ratings (1)

Parameter		Min	Max	Unit
V _{CC} to GND		-0.3	7	V
Voltage at Logic Pin: D, DE, \overline{RE} , R ⁽²⁾		-0.3	$V_{CC} + 0.3$	V
Voltage at Bus Pin: A, B as Receiver and Idle		-15	15	V
Voltage at Bus pin: A, B as Driver		-8	13	V
T_A	Operating Temperature Range	-40	125	°C
T_{STG}	Storage Temperature Range	-65	150	°C
T_J	Maximum Junction Temperature		150	°C
T_L	Lead Temperature (Soldering, 10 sec)		260	°C

(1) Stresses beyond the Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions.

Recommended Operating Conditions

All test conditions: over operating free-air temperature range, unless otherwise noted.

Parameter		Min	Typ	Max	Unit
V _{CC}	Supply Voltage	3		5.5	V
V _I	Input Voltage at Any Bus Terminal ⁽¹⁾	-7		12	V
V _{IH}	High-Level Input Voltage (Driver, Driver Enable, and Receiver Enable Inputs)	2		V_{CC}	V
V _{IL}	Low-Level Input Voltage (Driver, Driver Enable, and Receiver Enable Inputs)	0		0.8	V
V _{ID}	Differential Input Voltage	-7		12	V
R _L	Differential Load Resistance	54			Ω
T_A	Operating Ambient Temperature	-40		125	°C
T_J	Junction Temperature	-40		150	°C

(1) The algebraic convention in which the least positive (most negative) limit is designated as the minimum is used in this data sheet.

ESD, Electrostatic Discharge Protection

Symbol	Parameter	Condition		Minimum Level	Unit
	Contact Discharge	IEC-61000-4-2	Bus Pins	15	kV
	Air-Gap Discharge	IEC-61000-4-2	Bus Pins	18	kV
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001/ ANSI/ESD STM5.5.1	Bus Pins	18	kV
			All Pins except Bus Pins	4	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 ⁽¹⁾	All Pins	1.5	kV

(1) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Thermal Information

Package Type	θ_{JA}	θ_{JC}	Unit
SOP8	120	64	°C/W
MSOP8	135	68	°C/W
DFN3X3-8	65	23	°C/W

Electrical Characteristics

All test conditions: $V_{CC} = 5$ V, over operating free-air temperature range, unless otherwise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit	
Driver							
V _{OD}	Driver Differential-Output Voltage Magnitude, $V_{CC} = 3.3$ V	$R_L = 60 \Omega$, $-7 \text{ V} \leq V_{test} \leq +12 \text{ V}$	See Figure 1B	1.5	2.3		
		$R_L = 54 \Omega$ (RS-485)	See Figure 1A	1.5	2.2		
		$R_L = 100 \Omega$ (RS-485)		2.0	2.6		
	Driver Differential-Output Voltage Magnitude, $V_{CC} = 5.0$ V	$R_L = 60 \Omega$, $-7 \text{ V} \leq V_{test} \leq +12 \text{ V}$	See Figure 1B	2.0	3.5		
		$R_L = 54 \Omega$ (RS-485)	See Figure 1A	2.0	3.4		
		$R_L = 100 \Omega$ (RS-485)		2.7	3.9		
Δ V _{OD}	Change in Magnitude of Driver Differential-Output Voltage	$R_L = 54 \Omega$, $C_L = 50 \text{ pF}$	See Figure 1A	-50		50	
		$R_L = 100 \Omega$, $C_L = 50 \text{ pF}$	See Figure 1A	-50		50	
V _{OC (ss)}	Steady-State Common-Mode Output Voltage	Center of two 27-Ω load resistors	See Figure 1A	1	$V_{CC} / 2$	3	V
ΔV _{OC}	Change in Differential Driver Common-Mode Output Voltage			-65		65	mV
V _{OC (PP)}	Peak-to-Peak Driver Common-Mode Output Voltage				600		mV
I _{OS}	Driver Short-Circuit Output Current	I _{OS} with A shorted to B		86	110		mA
		I _{OS} with -7 V to +12 V		-220		220	
Receiver							
V _{IT+}	Positive-Going Receiver Differential-Input Voltage Threshold			-100	-15	mV	
V _{IT-}	Negative-Going Receiver Differential-Input Voltage Threshold		-240	-150		mV	
V _{HYS} (1)	Receiver Differential-Input Voltage Threshold Hysteresis ($V_{IT+} - V_{IT-}$)			60		mV	
V _{IH}	Logic Input High Voltage	DI, DE, \overline{RE}	2			V	
V _{IL}	Logic Input Low Voltage	DI, DE, \overline{RE}			0.8	V	
V _{OH}	Receiver High-Level Output Voltage	I _{OH} = -8 mA	4	$V_{CC} - 0.3$		V	
V _{OL}	Receiver Low-Level Output Voltage	I _{OL} = 8 mA		0.2	0.4	V	

3-V to 5.5-V RS-485 Transceivers

Symbol	Parameter	Conditions	Min	Typ	Max	Unit	
I_{in}	DE = 0, $V_{CC} = 0$ or $V_{CC} = 5.5$ V (A, B)	$V_I = 12$ V		30	120	μA	
		$V_I = -7$ V	-100	-50		μA	
RA, RB	Bus Input Impedance	$V_A = -7$ V, $V_B = 12$ V or $V_A = 12$ V, $V_B = -7$ V	96			$k\Omega$	
I_{OZ}	Receiver High-Impedance Output Current	$V_O = 0$ V or V_{CC} , \overline{RE} at V_{CC}	-1		1	μA	
I_{OSR}	Receiver Output Short to Ground Current	$REN = 0$, $DE = V_{CC}$		78	95	mA	
Logic							
I_{in}	Input current (\overline{RE} , DE, D)	4.5 V < V_{CC} < 5.5 V	-5		5	μA	
Supply							
I_{CC}	Supply Current (Quiescent)	Driver and receiver enabled	$DE = V_{CC}$, $\overline{RE} = GND$, no load		650	750	μA
		Driver enabled, receiver disabled	$DE = \overline{RE} = V_{CC}$, no load		450	600	
		Driver disabled, receiver enabled	$DE = GND$, $\overline{RE} = V_{CC}$, no load		450	600	
		Driver and receiver disabled	$DE = GND$, $\overline{RE} = D = V_{CC}$, no load		0.5	2	

Switching Characteristics

Symbol	Parameter	Conditions		Min	Typ	Max	Units
Driver							
t _r , t _f	Driver Differential-Output Rise and Fall Time	R _L = 54 Ω, C _L = 50 pF	See Figure 2		300		ns
t _{PHL} , t _{PLH}	Driver Propagation Delay			230	280	410	
t _{SK(P)}	Driver Pulse Skew, T _{phl} – T _{plh}					20	
t _{PHZ} , t _{PLZ}	Driver Disable Time	R _E = 0, $\overline{R_E}$ = V _{CC}	See Figure 3		50	90	ns
t _{PZH} , t _{PZL}	Driver Enable Time	R _E = 0			200	450	ns
		$\overline{R_E}$ = V _{CC}			2750	3200	
Receiver							
t _r , t _f	Receiver Rise and Fall Time				28		
t _{PHL} , t _{PLH}	Receiver Propagation Delay Time	C _L = 15 pF	See Figure 5		100	150	ns
t _{SK(P)}	Receiver Pulse Skew, T _{phl} – T _{plh}					25	
t _{PHZ} , t _{PLZ}	Driver Disable Time	R _E = 0, $\overline{R_E}$ = V _{CC}	See Figure 6		20	65	ns
t _{PZL}	Receiver Enable Time	DE = V _{CC}	See Figure 6		20	50	ns
t _{PZH}	Receiver Enable Time	DE = V _{CC}	See Figure 6		127	200	ns
t _{PZH} , t _{PZL}	Receiver Enable Time	DE = 0	See Figure 6		2600	3200	ns

Test Circuits and Waveforms

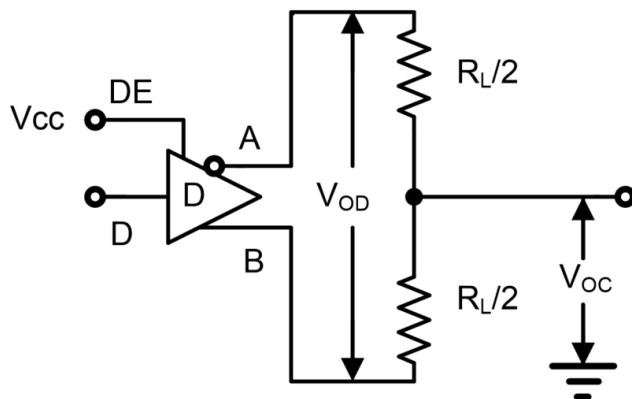


Figure 1A. V_{OD} and V_{OC}

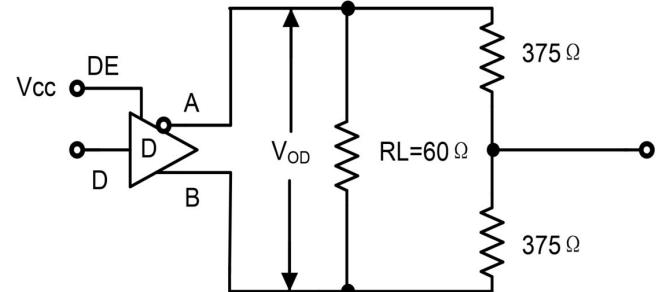


Figure 1B. V_{OD} with Common-Mode Load

Figure 1. DC Driver Test Circuits

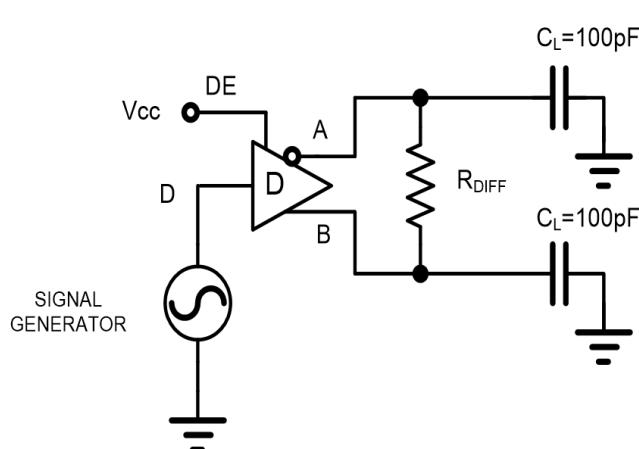


Figure 2A. Test Circuit

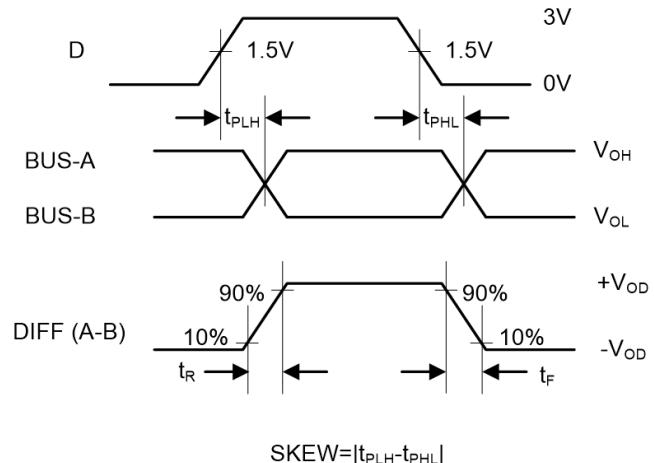
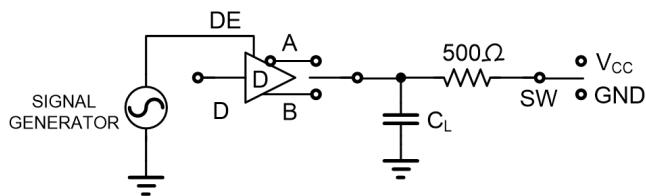
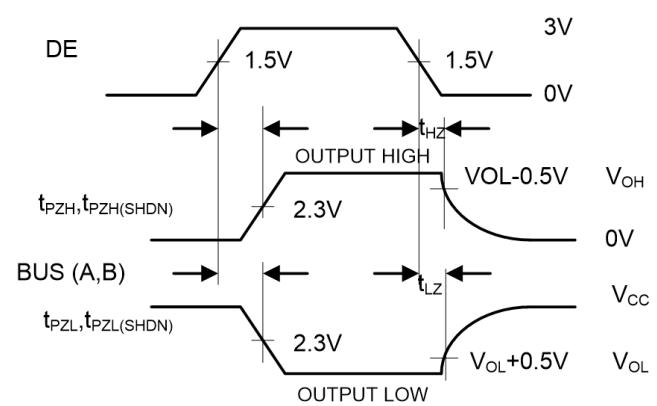
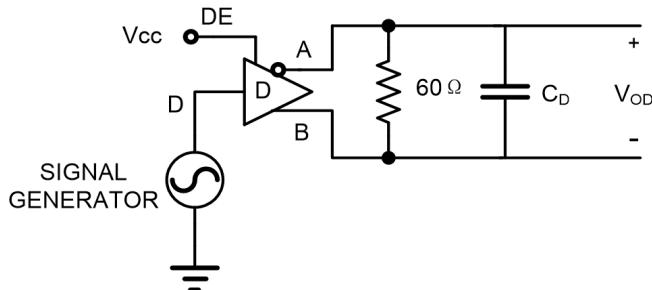
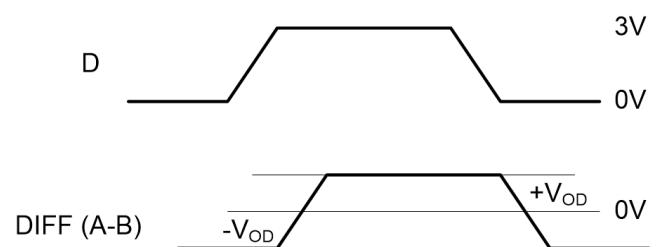
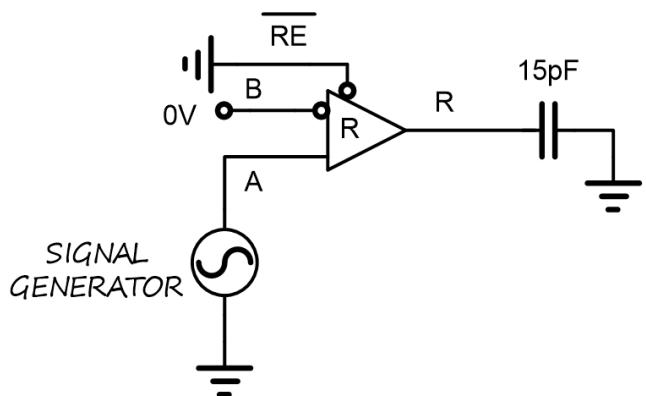
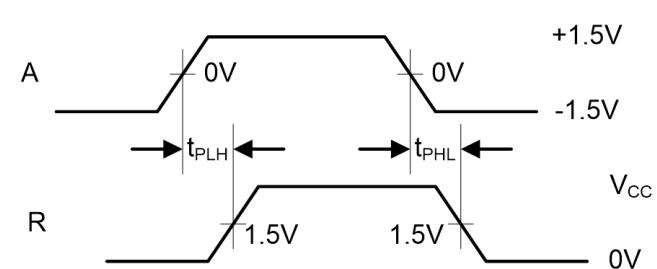


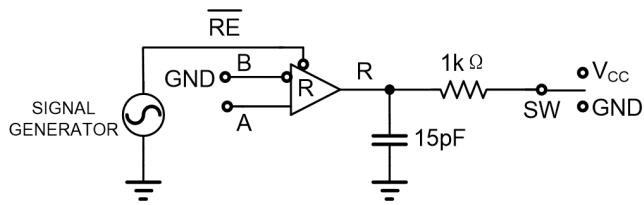
Figure 2B. Measurement Points

Figure 2. Driver Propagation Delay and Differential Transition Times



PARAMETER	OUTPUT	RE	DI	SW	C_L (pF)
tPHZ	A/B	X	1/0	GND	15
tPLZ	A/B	X	0/1	V _{CC}	15
tPZH	A/B	0	1/0	GND	100
tPZL	A/B	0	0/1	V _{CC}	100
tPZH(SHDN)	A/B	1	1/0	GND	100
tPZL(SHDN)	A/B	1	0/1	V _{CC}	100

Figure 3A. Test Circuit

Figure 3. Driver Enable and Disable Times

Figure 4A. Test Circuit

Figure 4. Driver Data Rate

Figure 5A. Test Circuit

Figure 5. Receiver Propagation Delay and Data Rate



PARAMETER	DE	A	SW
t _{PHZ}	1	+1.5V	GND
t _{PLZ}	1	-1.5V	V _{CC}
t _{PZH}	1	+1.5V	GND
t _{PZL}	1	-1.5V	V _{CC}
t _{PZH(SHDN)}	0	+1.5V	GND
t _{PZL(SHDN)}	0	-1.5V	V _{CC}

Figure 6A. Test Circuit

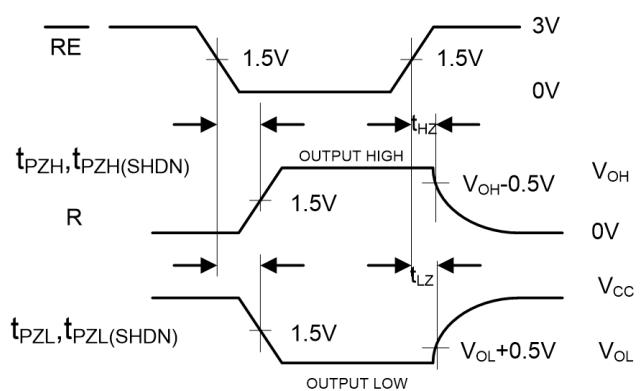



Figure 6B. Measurement Points

Figure 6. Receiver Enable and Disable Times

Detailed Description

Functional Block Diagram

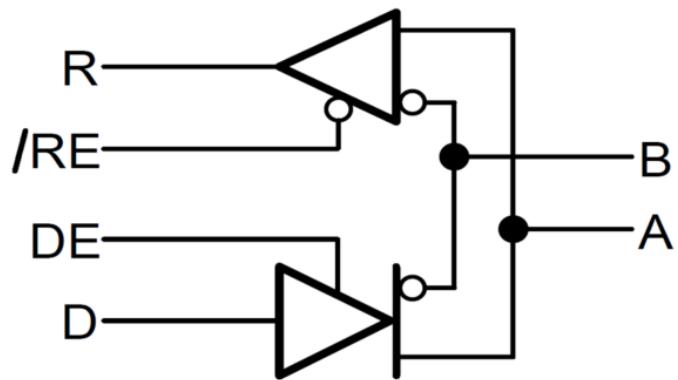TPT487 Block Diagram



Application and Implementation

Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

Typical Application

Figure 7 shows the typical application schematic.

TPT487 Network


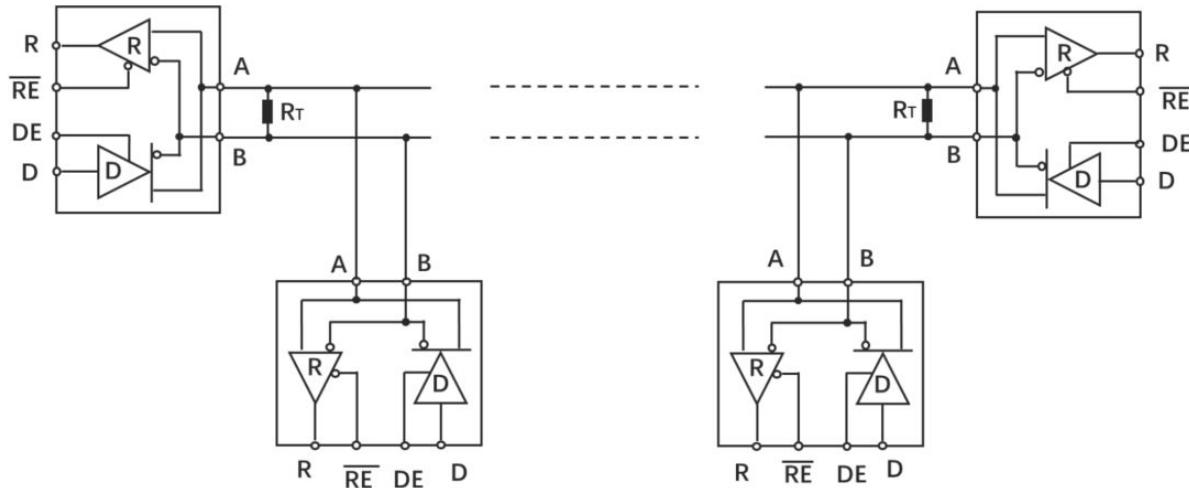
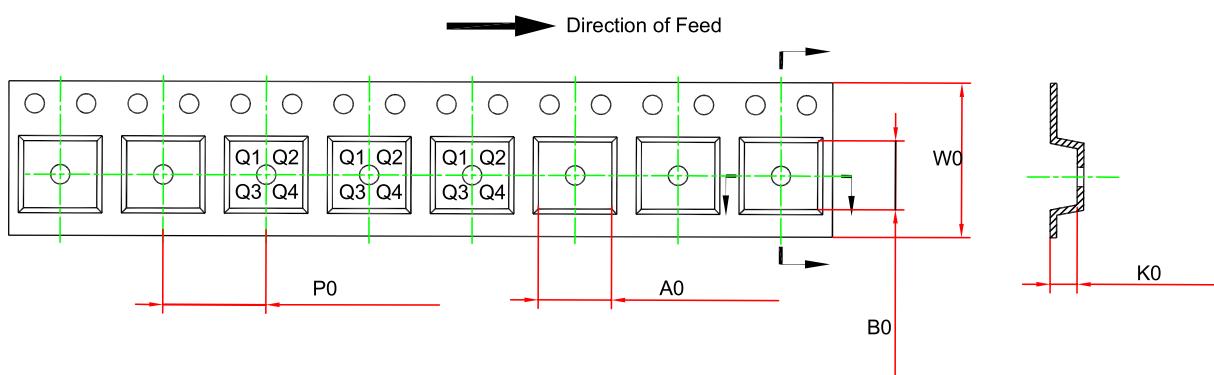


Figure 7. Typical Application Circuit

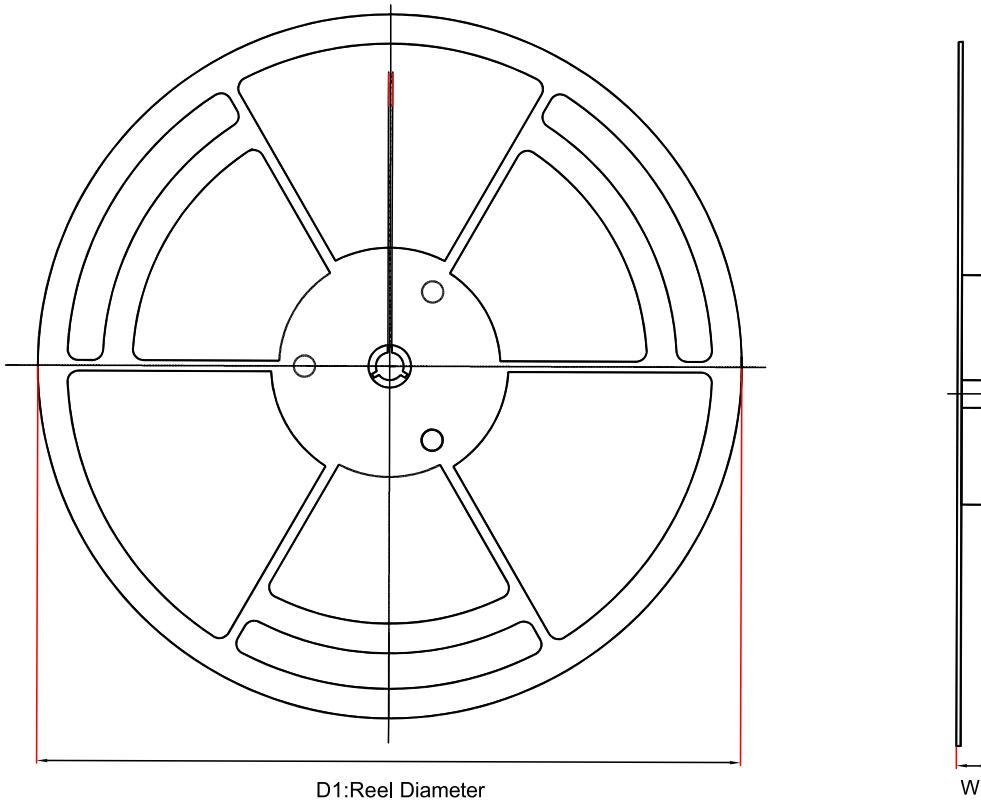Tape and Reel Information



Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm) ⁽¹⁾	B0 (mm) ⁽¹⁾	K0 (mm) ⁽¹⁾	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPT487L1-SO1R	SOP8	330.0	17.6	6.5	5.4	2.0	8.0	12.0	Q1
TPT487-VS1R	MSOP8	330.0	17.6	5.3	3.4	1.3	8.0	12.0	Q1
TPT487L1-DF6R	DFN3X3-8	330.0	17.6	3.3	3.3	1.1	8.0	12.0	Q1

(1) The value is for reference only. Contact the 3PEAK factory for more information.

Package Outline Dimensions

SOP8

Package Outline Dimensions		SO1(SOP-8-A)			
Symbol	Dimensions In Millimeters		Dimensions In Inches		
	MIN	MAX	MIN	MAX	
A	1.350	1.750	0.053	0.069	
A1	0.050	0.250	0.002	0.010	
A2	1.250	1.550	0.049	0.061	
b	0.330	0.510	0.013	0.020	
c	0.170	0.250	0.007	0.010	
D	4.700	5.100	0.185	0.201	
E	5.800	6.200	0.228	0.244	
E1	3.800	4.000	0.150	0.157	
e	1.270 BSC		0.050 BSC		
L	0.400	1.000	0.016	0.039	
θ	0	8°	0	8°	

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.





MSOP8

Package Outline Dimensions		VS1(MSOP-8-A)			
Symbol	Dimensions In Millimeters		Dimensions In Inches		
	MIN	MAX	MIN	MAX	
A	0.800	1.100	0.031	0.043	
A1	0.020	0.150	0.001	0.006	
A2	0.750	0.950	0.030	0.037	
b	0.250	0.380	0.010	0.015	
c	0.090	0.230	0.004	0.009	
D	2.900	3.100	0.114	0.122	
E	4.700	5.100	0.185	0.201	
E1	2.900	3.100	0.114	0.122	
e	0.650 BSC		0.026 BSC		
L	0.400	0.800	0.016	0.031	
θ	0	8°	0	8°	

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

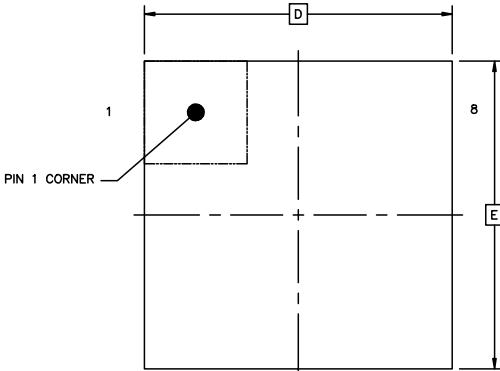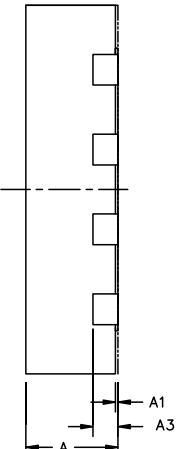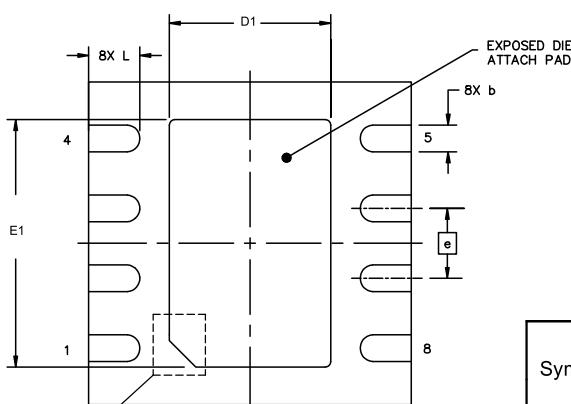DFN3X3-8

Package Outline Dimensions		DF6(DFN3X3-8-A)			
TOP VIEW		SIDE VIEW			
					
					
Symbol	Dimensions In Millimeters		Dimensions In Inches		
	MIN	MAX	MIN	MAX	
A	0.700	0.800	0.028	0.031	
A1	0.000	0.050	0.000	0.002	
b	0.200	0.350	0.008	0.014	
A3	0.150	0.250	0.006	0.010	
D	2.900	3.100	0.114	0.122	
D1	1.400	1.600	0.055	0.063	
E	2.900	3.100	0.114	0.122	
E1	2.200	2.400	0.087	0.094	
e	0.650 BSC		0.026 BSC		
L	0.224	0.575	0.009	0.023	

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.
3. The many types of E-pad Pin1 signs may appear in the product.

Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPT487L1-SO1R	-40 to 125°C	SOP8	T487	1	Tape and Reel, 4000	Green
TPT487-VS1R	-40 to 125°C	MSOP8	T487	3	Tape and Reel, 3000	Green
TPT487L1-DF6R	-40 to 125°C	DFN3X3-8	T487	1	Tape and Reel, 4000	Green

Green: 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

IMPORTANT NOTICE AND DISCLAIMER

Copyright© 3PEAK 2012-2025. All rights reserved.

Trademarks. Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

Performance Information. Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

Disclaimer. 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.



TPT487

3-V to 5.5-V RS-485 Transceivers

This page intentionally left blank