

Watchdog Timer Circuit with EN Control

Features

- Qualified for Automotive Applications
- AEC-Q100 Grade 1: $T_A = -40^{\circ}\text{C}$ to 125°C
- Available Watchdog Timeout Periods 10 ms, 100 ms, 0.6 s, 1.6 s, 3.2s, 6.4 s and 10 s
- Chip Enable Input
- Open Drain or Push-Pull Active Low $\overline{\text{WDO}}$ Output
- Low Power Consumption: 6 μA
- Guaranteed Output Valid to $V_{CC} = 1.67\text{ V}$
- Package: SOT23-5

Applications

- Automotive Cabin
- T-Box
- BMS
- ESS
- Industry Equipment

Description

The TPV710 is a watchdog timer circuit which prevents system failures caused by certain types of hardware errors or software errors.

The TPV710 watchdog timer circuit has an input, WDI , and output $\overline{\text{WDO}}$. The input is used to clear the internal watchdog timer periodically within the specified timeout period t_{WD} . While the system operates correctly, it periodically toggles the watchdog input, WDI . If the system fails, the watchdog timer is not reset, and the watchdog output, $\overline{\text{WDO}}$, is asserted.

The TPV710 has an enable input, $\overline{\text{EN}}$, which can enable or disable the watchdog functionality. The $\overline{\text{EN}}$ is connected to the internal pull-down resistor. The device is enabled if the $\overline{\text{EN}}$ pin is left floating.

The TPV710 is available in SOT23-5 package. The operation temperature range is -40°C to 125°C .

Typical Application Circuit

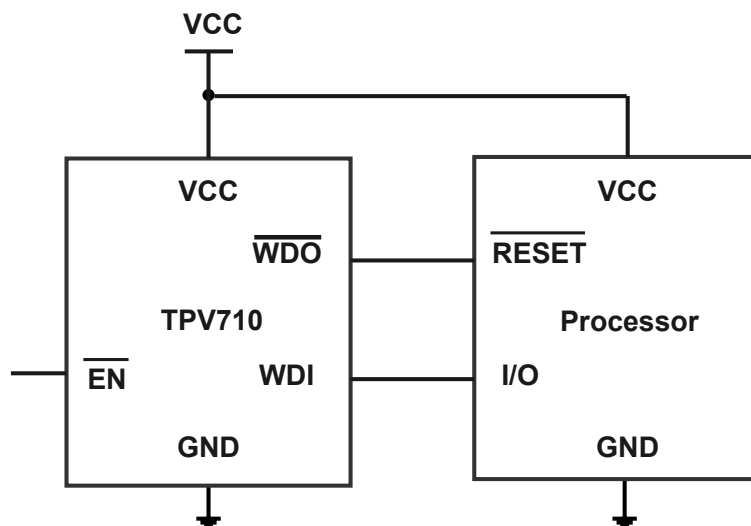


Table of Contents

Features.....	1
Applications.....	1
Description.....	1
Typical Application Circuit.....	1
Product Family Table.....	3
Revision History.....	3
Pin Configuration and Functions.....	4
Specifications.....	5
Absolute Maximum Ratings	5
ESD, Electrostatic Discharge Protection.....	5
Thermal Information.....	5
Electrical Characteristics.....	6
Typical Performance Characteristics.....	7
Detailed Description.....	8
Overview.....	8
Functional Block Diagram.....	8
Feature Description.....	9
Application and Implementation.....	10
Typical Application.....	10
Tape and Reel Information.....	11
Package Outline Dimensions.....	12
SOT23-5.....	12
Order Information.....	13
IMPORTANT NOTICE AND DISCLAIMER.....	14

Product Family Table

Order Number	Watchdog Timer	Open Drain or Push Pull	Marking Information	Package	Quality Grade
TPV710NXQ-S5TR-S ⁽¹⁾	10ms	Open Drain	NXQ	SOT23-5	Automotive
TPV710NWQ-S5TR-S	100ms	Open Drain	NWQ	SOT23-5	Automotive
TPV710NZQ-S5TR-S	0.6s	Open Drain	NZQ	SOT23-5	Automotive
TPV710NYQ-S5TR-S	1.6s	Open Drain	NYQ	SOT23-5	Automotive
TPV710NSQ-S5TR-S ⁽¹⁾	3.2s	Open Drain	NSQ	SOT23-5	Automotive
TPV710NTQ-S5TR-S	6.4s	Open Drain	NTQ	SOT23-5	Automotive
TPV710NV-S5TR ⁽¹⁾	12.8s	Open Drain	7NV	SOT23-5	Industry

(1) For future products, contact the 3PEAK factory for more information and samples.

Revision History

Date	Revision	Notes
2024-04-18	Rev.A.0	Initiation version.
2024-05-28	Rev.A.1	Added TPV710NSQ and TPV710NTQ version. Added AEC-Q100 description in feature list. Removed SC70 package.

Watchdog Timer Circuit with EN Control

Pin Configuration and Functions

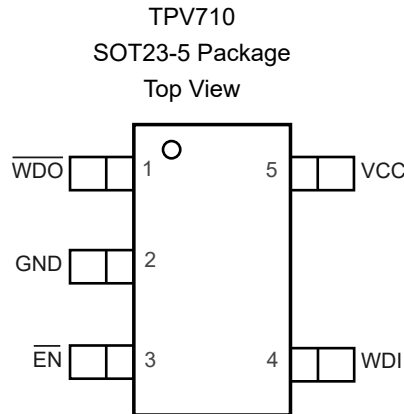


Table 1. Pin Functions

Pin		I/O	Description
NO.	Name		
1	$\overline{\text{WDO}}$	O	Watchdog Output. Pulls low for t_{RP} if WDI remains low or high for the duration of the watchdog timeout, and does not go high again until the watchdog is cleared. Whenever VCC is below the reset threshold, $\overline{\text{WDO}}$ stays high.
2	GND	-	Ground.
3	$\overline{\text{EN}}$	I	Enable pin, enable or disable watchdog. $\overline{\text{EN}}$ pin is connected to the internal pull-down resistor. The device is enabled if the $\overline{\text{EN}}$ is left floating.
4	WDI	I	Watchdog Input. The timer is cleared if a logic transition occurs on this pin.
5	VCC	–	Power Supply Voltage Monitored.

Watchdog Timer Circuit with EN Control

Specifications

Absolute Maximum Ratings

Parameter		Min	Max	Unit
Input Voltage	VCC, WDI, $\overline{\text{WDO}}$, $\overline{\text{EN}}$ to GND	-0.3	6	V
Output Current	$\overline{\text{WDO}}$		20	mA
T _J	Maximum Junction Temperature	-40	150	°C
T _{STG}	Storage Temperature Range	-65	150	°C
T _L	Lead Temperature (Soldering 10 sec)		260	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

(2) This data was taken with the JEDEC low effective thermal conductivity test board.

(3) This data was taken with the JEDEC standard multilayer test boards.

ESD, Electrostatic Discharge Protection

Parameter		Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±2000	V
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 ⁽²⁾	±1000	V

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Thermal Information

Package Type	θ_{JA}	θ_{JC}	Unit
SOT23-5	128	67	°C/W

Watchdog Timer Circuit with EN Control

Electrical Characteristics

All test conditions: $V_{CC} = 1.67\text{ V to }5.5\text{ V}$, $T_A = -40^{\circ}\text{C to }+125^{\circ}\text{C}$, unless otherwise noted.

Parameter		Conditions	Min	Typ	Max	Unit
Supply Voltage and Current						
V _{CC}	V _{CC} Operating Voltage Range		1.67		5.5	V
I _{CC}	Supply Current	WDI and $\overline{\text{EN}}$ unconnected (V _{CC} = 5 V)		6	15	μA
V _{START}	Watchdog Timer Startup Voltage			2.19		V
V _{IL}	Input Threshold Voltage Low for WDI, $\overline{\text{EN}}$				0.3× V _{CC}	V
V _{IH}	Input Threshold Voltage High for WDI, $\overline{\text{EN}}$		0.7× V _{CC}			V
V _{OL}	$\overline{\text{WDO}}$ Output Voltage Low	V _{CC} ≥ 1.67 V, I _{SINK} = 1.2 mA			0.3	V
V _{OH}	$\overline{\text{WDO}}$ Output Voltage High (Push-Pull Only)	V _{CC} ≥ 1.67 V, I _{SOURCE} = 500 μA	0.8 × V _{CC}			V
t _{PW_EN}	$\overline{\text{EN}}$ Input Pulse Width		1			μs
t _{GR_EN}	$\overline{\text{EN}}$ Glitch Rejection			250		ns
t _{d_EN}	$\overline{\text{EN}}$ to $\overline{\text{WDO}}$ Delay			300		ns
R _{PD_EN}	$\overline{\text{EN}}$ Pull-Down Resistance			50		kΩ
WDI Pin						
t _{WD}	Watchdog Timeout Period	TPV710NXQ	7	10	14	ms
		TPV710NWQ	70	100	140	ms
		TPV710NZQ	0.42	0.6	0.84	s
		TPV710NYQ	1.12	1.6	2.24	s
		TPV710NSQ	2.24	3.2	4.48	s
		TPV710NTQ	4.48	6.4	8.96	s
		TPV710NV	8.9	12.8	17.9	s
t _{RP}	$\overline{\text{WDO}}$ Pull Low Period when Watchdog Timeout	TPV710NXQ	4.2	6	8.4	ms
		TPV710NWQ	67	96	134	ms
		TPV710NZQ	53	75	105	ms
		TPV710NYQ, TPV710NSQ, TPV710NTQ, or TPV710NV	140	200	280	ms
t _{PW_WD}	WDI Pulse Width		50			ns
t _{GR_WD}	WDI Glitch Rejection			20		ns

Watchdog Timer Circuit with EN Control

Typical Performance Characteristics

All test conditions: $V_{CC} = 3.3\text{ V}$, $T_A = +25^\circ\text{C}$, unless otherwise noted.

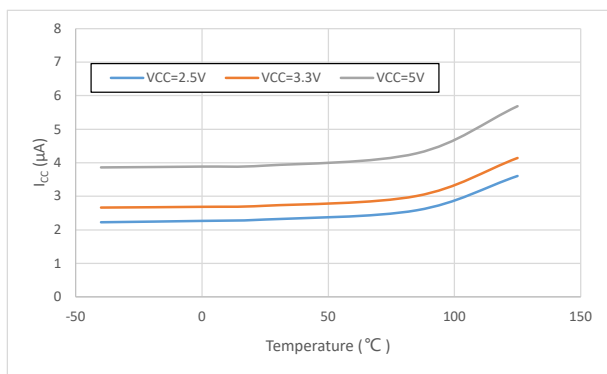


Figure 1. Supply Current vs. Temperature

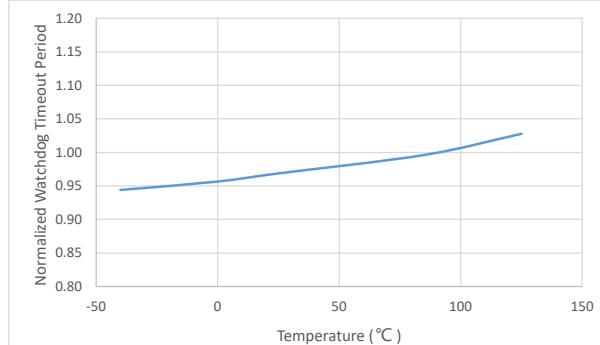


Figure 2. Normalized Watchdog Timeout Period vs. Temperature

Detailed Description

Overview

The TPV710 is a watchdog timer circuit which prevent system failures that are caused by certain types of hardware errors or software errors. The TPV710 watchdog timer circuit has an input, WDI, and output \overline{WDO} . The input is used to clear the internal watchdog timer periodically within the specified timerout period t_{WD} . While the system is operating correctly, it periodically toggles the watchdog input, WDI. If the system fails, the watchdog timer is not reset, the watchdog output, \overline{WDO} , is asserted. The TPV710 has an enable input, \overline{EN} , which can enable or disable the watchdog functionality. The \overline{EN} is connected to the internal pull down resistor. The device is enabled if the \overline{EN} pin is left floating. The TPV710 is available in SOT23-5 package. The operation temperature range is -40°C to 125°C .

Functional Block Diagram

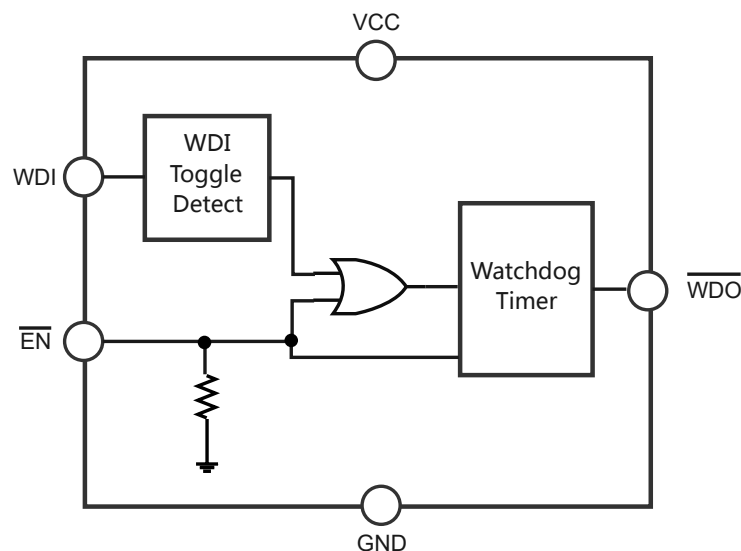


Figure 3. Functional Block Diagram

Watchdog Timer Circuit with EN Control

Feature Description

Watchdog Input

The TPV710 features a watchdog timer, which monitors microprocessor activity. A timer circuit is cleared with every low-to-high or high-to-low logic transition on the watchdog input pin (WDI). If the timer counts through the watchdog timeout period (t_{WD}), \overline{WDO} is asserted. The microprocessor is required to toggle the WDI pin to avoid being reset.

Enable Control

TPV710 has \overline{EN} pin to control the watchdog timer, if \overline{EN} is pull low, the watchdog timer is enabled, if \overline{EN} is pull high, the watchdog timer is disabled and the timer count is cleared. \overline{EN} has internal pull down resistor, which means watchdog timer is enabled if \overline{EN} is not connected. In addition to \overline{EN} control, the watchdog timer is also cleared by an under-voltage condition on V_{CC} . After V_{CC} ramps above V_{UV} , the watchdog timer can be controlled by \overline{EN} control, and the timer starts counting.

Watchdog Output

When watchdog timer out occurs, the \overline{WDO} goes low for t_{PR} , and then goes high. If no WDI toggling, \overline{WDO} goes low again after t_{WD} .

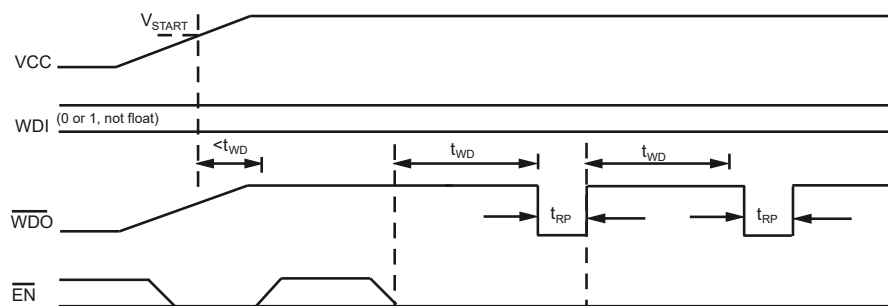


Figure 4. Watchdog Timing Diagram

Application and Implementation

Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

Typical Application

The following figure shows the typical application schematic.



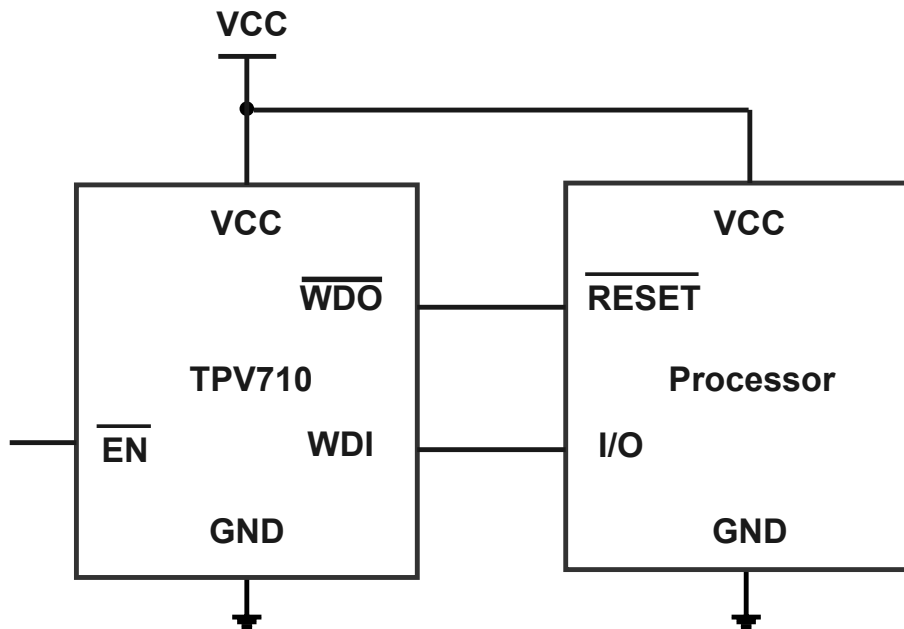


Figure 5. Typical Application Circuit

Tape and Reel Information

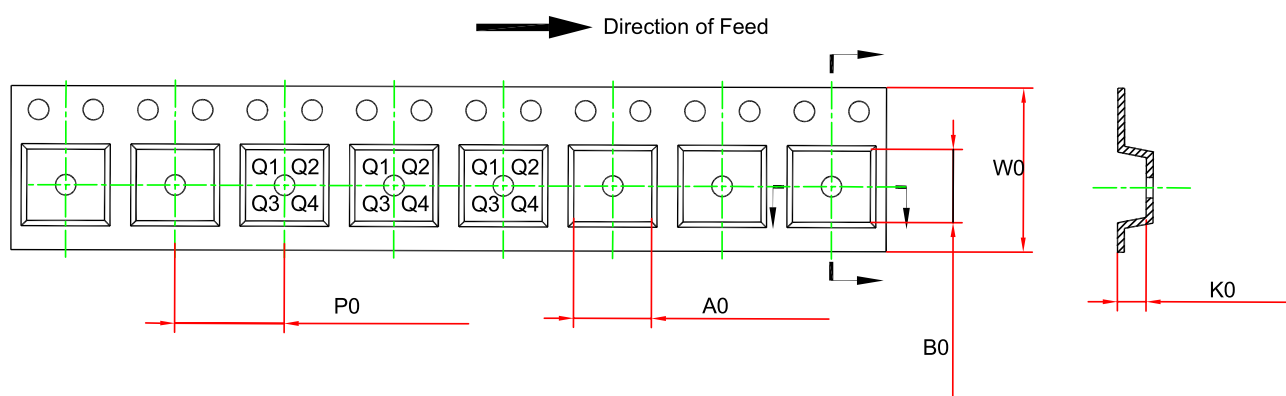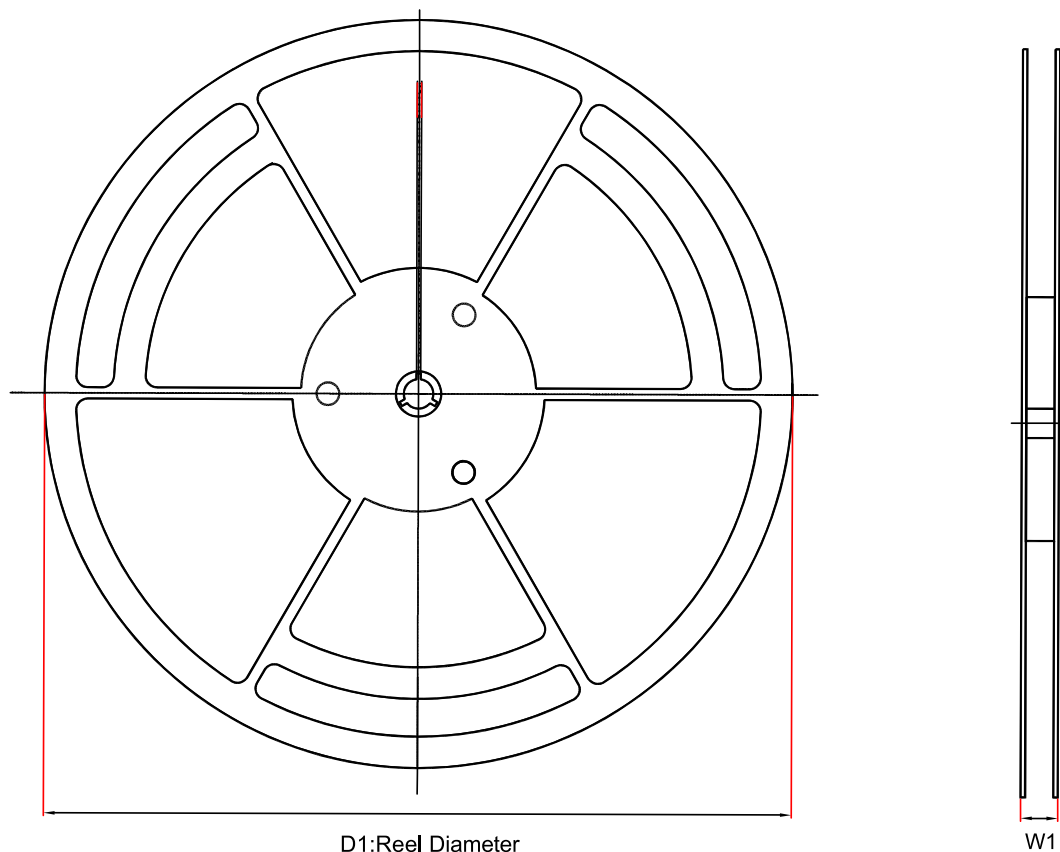





Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPV710xxQ-S5TR-S	SOT23-5	179	12	3.3	3.25	1.4	4	8	Q3

Package Outline Dimensions

SOT23-5

Package Outline Dimensions

S5T(SOT23-5-A)

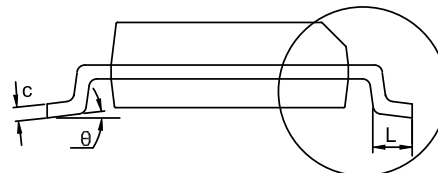

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.150	0.000	0.006
A2	1.000	1.200	0.039	0.047
b	0.280	0.500	0.011	0.020
c	0.100	0.230	0.004	0.009
D	2.820	3.020	0.111	0.119
E	2.600	3.000	0.102	0.118
E1	1.500	1.720	0.059	0.068
e	0.950 BSC		0.037 BSC	
L	0.300	0.600	0.012	0.024
θ	0	8°	0	8°

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPV710NXQ-S5TR-S ⁽¹⁾	-40°C to 125°C	SOT23-5	NXQ	1	Tape and Reel, 3,000	Green
TPV710NWQ-S5TR-S	-40°C to 125°C	SOT23-5	NWQ	1	Tape and Reel, 3,000	Green
TPV710NZQ-S5TR-S	-40°C to 125°C	SOT23-5	NZQ	1	Tape and Reel, 3,000	Green
TPV710NYQ-S5TR-S	-40°C to 125°C	SOT23-5	NYQ	1	Tape and Reel, 3,000	Green
TPV710NSQ-S5TR-S ⁽¹⁾	-40°C to 125°C	SOT23-5	NSQ	1	Tape and Reel, 3,000	Green
TPV710NTQ-S5TR-S	-40°C to 125°C	SOT23-5	NTQ	1	Tape and Reel, 3,000	Green
TPV710NV-S5TR ⁽¹⁾	-40°C to 125°C	SOT23-5	7NV	1	Tape and Reel, 3,000	Green

(1) For future products, contact the 3PEAK for more information and samples.

Green: 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

IMPORTANT NOTICE AND DISCLAIMER

Copyright© 3PEAK 2012-2024. All rights reserved.

Trademarks. Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

Performance Information. Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

Disclaimer. 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.