

Features

- Latch-up Performance Exceeds 800 mA per JESD 78, Class II
- Supply Voltage: 1.65 V to 5.5 V
- Low On-State Resistance: Typical 0.95 Ω at $V_S = 4.5$ V
- Bandwidth: 100 MHz
- Fast Switching Times: $t_{ON} = 40$ ns, $t_{OFF} = 15$ ns
- Break-Before-Make Switching
- Operation Temperature Range: -40°C to 125°C

Applications

- Industry Control Systems
- Battery-Powered Systems
- Audio Signal Routing
- Portable Instruments and Mobile Devices

Description

The TPW3223 is a high-performance Single Pole/Double Throw (SPDT) analog switch. The device features ultra-low R_{ON} of 1.2 Ω maximum at 4.5 V V_{CC} and operates over a wide V_{CC} range from 1.65 V to 5.5 V.

The TPW3223 features very low quiescent current even when the control voltage is lower than the V_{CC} supply. This feature serves the portable applications very well, allowing for the direct interface with processor general purpose I/Os.

The TPW3223 has excellent channel-to-channel crosstalk performance to fit the applications with high channel-to-channel isolation requirements.

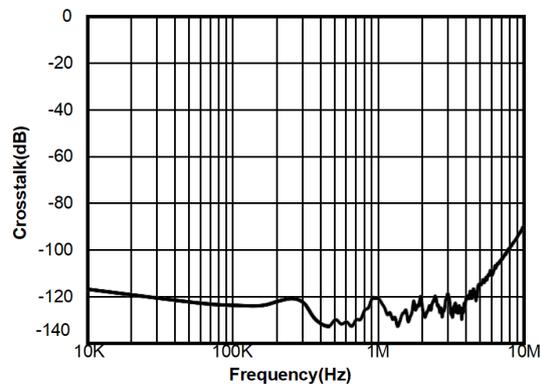


Table of Contents

Features	1
Applications	1
Description	1
Revision History	3
Pin Configuration and Functions	4
Specifications	5
Absolute Maximum Ratings ⁽¹⁾	5
ESD, Electrostatic Discharge Protection.....	5
Recommended Operating Conditions ⁽¹⁾	5
Thermal Information.....	5
Electrical Characteristics.....	6
Electrical Characteristics (Continued).....	8
Electrical Characteristics (Continued).....	10
Electrical Characteristics (Continued).....	12
Typical Performance Characteristics.....	13
Test Circuit and Waveforms.....	14
Application and Implementation	16
Application Information	16
Tape and Reel Information	17
Package Outline Dimensions	18
QFN1.4X1.8-10.....	18
Order Information	19
IMPORTANT NOTICE AND DISCLAIMER	20

Revision History

Date	Revision	Notes
2018-06-24	Rev.Pre.0	Pre-released version.
2019-01-09	Rev.Pre.1	Updated the Tape and Reel Information.
2019-01-28	Rev.A.0	Initial version.
2019-09-09	Rev.A.1	<ul style="list-style-type: none">Updated the Tape and Reel Information: from 3000 to 4000.Removed the data code information.Corrected the T_{off} test condition in Figure 6: from 50% of output to 90% of output.Changed the spec of ΔR_{ON} at 1.65 V_{CC}: from 2/3/3 Ω to 5/7/7 Ω.Changed the spec of $T_{on}/T_{off}/T_b$ at 1.65 V_{CC}: from "max" to "typ".
2024-12-04	Rev.A.2	The following updates are all about the new datasheet formats or typos, and the actual product remains unchanged. Updated to a new datasheet format. Updated the Package Outline Dimensions.

Pin Configuration and Functions

TPW3223
QFN1.4X1.8-10
Top View

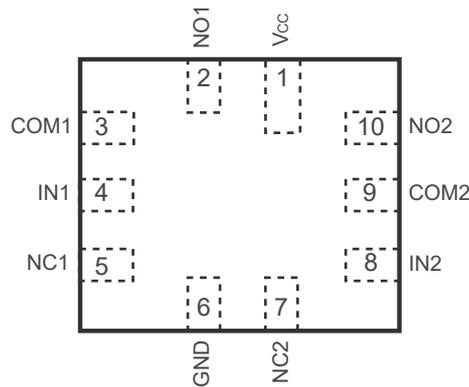


Table 1. Pin Functions

Pin No.	Name	I/O	Description
1	V _{CC}		Power supply.
2	NO1		Switch port 1, normal open.
3	COM1		Common switch port 1.
4	IN1		Select pin 1.
5	NC1		Switch port 1, normal close.
6	GND		Ground.
7	NC2		Switch port 2, normal close.
8	IN2		Select pin 2.
9	COM2		Common switch port 2.
10	NO2		Switch port 2, normal open.

Table 2. Function Table

IN1, IN2	NC1, NC2	NO1, NO2
Low	ON	OFF
High	OFF	ON

Specifications

Absolute Maximum Ratings ⁽¹⁾

Parameter		Min	Max	Unit
	Supply Voltage, V_{CC}	-0.5	6	V
	Select Input Voltage	-0.5	6	V
	Select Input Diode Current		-50	mA
	Switch I/O Port Voltage	-0.5	$V_{CC} + 0.5$	V
	Switch I/O Port Diode Current	-50	50	mA
	Switch Current		200	mA
T_J	Maximum Junction Temperature		150	°C
T_{STG}	Storage Temperature Range	-65	150	°C
T_L	Lead Temperature (Soldering, 10 sec)		260	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

ESD, Electrostatic Discharge Protection

Symbol	Parameter	Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	4	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 ⁽²⁾	2	kV

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Recommended Operating Conditions ⁽¹⁾

All test conditions: over operating temperature range, unless otherwise noted.

Parameter		Min	Max	Unit
	Supply Voltage, V_{CC}	1.65	5.5	V
	Select Input Voltage	0	V_{CC}	V
	Input Transition Rise and Fall Rate		100	ns/V
	Switch I/O Port Voltage	0	V_{CC}	V
T_A	Operating Temperature Range	-40	125	°C

(1) The select input must be held High or Low and must not float.

Thermal Information

Package Type	θ_{JA}	θ_{JC}	Unit
QFN1.4X1.8-10	150	100	°C/W

Electrical Characteristics

 All test conditions: $V_{CC} = 4.5\text{ V to }5.5\text{ V}$, unless otherwise noted.

Symbol	Parameter	Conditions	V_{CC} (V)	25°C	-40°C to 85°C	-40°C to 125°C	Limit	Unit
Power Supply								
I_{CC}	Quiescent Supply Current	$V_{IN} = 0\text{ V or }V_{CC}$	5.5	0.3	0.5	1.5	Max	μA
ΔI_{CC}	Increase in I_{CC} per Input	Select input at 2.7 V, others at V_{CC} or GND	4.3	30	35	35	Max	μA
Digital Input								
V_{IH}	Input Voltage High				2.4	2.4	Min	V
V_{IL}	Input Voltage Low				0.8	0.8	Max	V
I_{IN}	Control Input Leakage	$V_{IN} = 0\text{ V or }V_{CC}$	5.5		± 1	± 1	Max	μA
Analog Switch								
R_{ON}		$I_{OUT} = 100\text{ mA}$, NCx or $NOx = 3.5\text{ V}$	4.5	0.95			Typ	Ω
R_{ON}		$I_{OUT} = 100\text{ mA}$, NCx or $NOx = 3.5\text{ V}$	4.5	1.2	1.4	1.5	Max	Ω
ΔR_{ON}	Maximum On Resistance	$I_{OUT} = 100\text{ mA}$, NCx or $NOx = 3.5\text{ V}$	4.5	0.12	0.15	0.2	Max	Ω
$R_{FLAT(ON)}$	On Resistance Flatness	$I_{OUT} = 100\text{ mA}$, NCx or $NOx = 0\text{ V, }1\text{ V, }2\text{ V}$	4.5	0.3	0.4	0.5	Max	Ω
$I_{NO(OFF)}$, $I_{NC(OFF)}$	Switch OFF Leakage Current on B0, B1	$COMx = 1\text{ V, }4.5\text{ V}$, NCx or $NOx = 4.5\text{ V, }1\text{ V}$	5.5	± 10	± 25	± 50	Max	nA
$I_{A(OFF)}$	Switch OFF Leakage Current on A	$COMx = 1\text{ V, }4.5\text{ V}$, NCx or $NOx = 4.5\text{ V, }1\text{ V}$	5.5	± 10	± 50	± 100	Max	nA
$I_{A(ON)}$	Switch ON Leakage Current on A	$COMx = 1\text{ V, }4.5\text{ V}$, NCx or $NOx = 1\text{ V, }4.5\text{ V}$, or floating	5.5	± 10	± 50	± 100	Max	nA
Dynamic Characteristics								
t_{PHL}, t_{PLH}	Switch IN to OUT Time	NCx or $NOx = 3\text{ V}$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, Figure 7	4.5	5			Typ	ns
t_{ON}	Switch Turn-on Time	NCx or $NOx = 3\text{ V}$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, Figure 7	4.5	40	45	45	Max	ns
t_{OFF}	Switch Turn-off Time	NCx or $NOx = 3\text{ V}$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, Figure 7	4.5	15	20	20	Max	ns
t_B	Break-Before-Make Time	NCx or $NOx = 3\text{ V}$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, Figure 8	4.5	20	40	40	Typ	ns
Q	Charge Injection	$C_L = 1.0\text{ nF}$, $V_{GEN} = 0\text{ V}$, $R_{GEN} = 0\ \Omega$, Figure 9	5.5	20			Typ	pC

Low-Voltage 1-Ω SPDT Analog Switch

Symbol	Parameter	Conditions	V _{CC} (V)	25°C	-40°C to 85°C	-40°C to 125°C	Limit	Unit
	OFF-Isolation	f = 1 MHz, R _L = 50 Ω, Figure 10	5	-65			Typ	dB
	Crosstalk	f = 1 MHz, R _L = 50 Ω, Figure 11	5	-65			Typ	dB
	Channel-to-Channel Crosstalk	f = 1 MHz, Figure 12	5	-120			Typ	dB
BW	Bandwidth	R _L = 50 Ω	5	100			Typ	MHz
THD	Total Harmonic Distortion	R _L = 600 Ω, V _{IN} = 0.5 V _{PP} , f = 20 Hz to 20 kHz	5	0.004			Typ	%
Capacitance								
C _{IN}	Select Input Capacitance		5	5			Typ	pF
C _{OFF}	B-Port Off Capacitance		5	12			Typ	pF
C _{ON}	On Capacitance		5	40			Typ	pF

Electrical Characteristics (Continued)

 All test conditions: $V_{CC} = 2.7\text{ V}$ to 3.6 V , unless otherwise noted.

Symbol	Parameter	Conditions	V_{CC} (V)	25°C	-40°C to 85°C	-40°C to 125°C	Limit	Unit
Power Supply								
I_{CC}	Quiescent Supply Current	$V_{IN} = 0\text{ V}$ or V_{CC}	3.6	0.3	0.5	1.5	Max	μA
Digital Input								
V_{IH}	Input Voltage High				1.65	1.65	Min	V
V_{IL}	Input Voltage Low				0.6	0.6	Max	V
I_{IN}	Control Input Leakage	$V_{IN} = 0\text{ V}$ or V_{CC}	3.6		± 1	± 1	Max	μA
Analog Switch								
R_{ON}		$I_{OUT} = 100\text{ mA}$, NCx or $NOx = 1.5\text{ V}$	2.7	2			Typ	Ω
R_{ON}		$I_{OUT} = 100\text{ mA}$, NCx or $NOx = 1.5\text{ V}$	2.7	2.1	2.3	2.6	Max	Ω
ΔR_{ON}	Maximum On Resistance	$I_{OUT} = 100\text{ mA}$, NCx or $NOx = 1.5\text{ V}$	2.7	0.1	0.15	0.2	Max	Ω
$R_{FLAT(ON)}$	On Resistance Flatness	$I_{OUT} = 100\text{ mA}$, NCx or $NOx = 0\text{ V}, 0.75\text{ V}, 1.5\text{ V}$	2.7	1.2	1.3	1.4	Max	Ω
$I_{NO(OFF)}, I_{NC(OFF)}$	Switch OFF Leakage Current on B0, B1	$COMx = 0\text{ V}, 3.6\text{ V}$, NCx or $NOx = 3.6\text{ V}, 0\text{ V}$	3.6	± 10	± 25	± 50	Max	nA
$I_{A(OFF)}$	Switch OFF Leakage Current on A	$COMx = 0\text{ V}, 3.6\text{ V}$, NCx or $NOx = 3.6\text{ V}, 0\text{ V}$	3.6	± 10	± 50	± 100	Max	nA
$I_{A(ON)}$	Switch ON Leakage Current on A	$COMx = 0\text{ V}, 3.6\text{ V}$, NCx or $NOx = 0\text{ V}, 3.6\text{ V}$, or floating	3.6	± 10	± 50	± 100	Max	nA
Dynamic Characteristics								
t_{PHL}, t_{PLH}	Switch IN to OUT Time	NCx or $NOx = 1.5\text{ V}$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, Figure 7	2.7	10			Typ	ns
t_{ON}	Switch Turn-on Time	NCx or $NOx = 1.5\text{ V}$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, Figure 7	2.7	60	70	70	Max	ns
t_{OFF}	Switch Turn-off Time	NCx or $NOx = 1.5\text{ V}$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, Figure 7	2.7	25	30	30	Max	ns
t_B	Break-Before-Make Time	NCx or $NOx = 1.5\text{ V}$, $R_L = 50\ \Omega$, $C_L = 35\text{ pF}$, Figure 8	2.7	20			Typ	ns
Q	Charge Injection	$C_L = 1.0\text{ nF}$, $V_{GEN} = 0\text{ V}$, $R_{GEN} = 0\ \Omega$, Figure 9	3	20			Typ	pC

Low-Voltage 1- Ω SPDT Analog Switch

Symbol	Parameter	Conditions	V _{CC} (V)	25°C	-40°C to 85°C	-40°C to 125°C	Limit	Unit
	OFF-Isolation	f = 1 MHz, R _L = 50 Ω , Figure 10	3	-65			Typ	dB
	Crosstalk	f = 1 MHz, R _L = 50 Ω , Figure 11	3	-65			Typ	dB
	Channel-to-Channel Crosstalk	f = 1 MHz, Figure 12	3	-120			Typ	dB
BW	Bandwidth	R _L = 50 Ω	3	100			Typ	MHz
THD	Total Harmonic Distortion	R _L = 600 Ω , V _{IN} = 0.5 V _{PP} , f = 20 Hz to 20 kHz	3	0.01			Typ	%

Electrical Characteristics (Continued)

 All test conditions: $V_{CC} = 1.65\text{ V to }1.95\text{ V}$, unless otherwise noted.

Symbol	Parameter	Conditions	V_{CC} (V)	25°C	-40°C to 85°C	-40°C to 125°C	Limit	Unit
Power Supply								
I_{CC}	Quiescent Supply Current	$V_{IN} = 0\text{ V or }V_{CC}$	1.95	0.3	0.5	1.5	Max	μA
Digital Input								
V_{IH}	Input Voltage High				1.4	1.4	Min	V
V_{IL}	Input Voltage Low				0.4	0.4	Max	V
I_{IN}	Control Input Leakage	$V_{IN} = 0\text{ V or }V_{CC}$	1.95		±1	±1	Max	μA
Analog Switch								
R_{ON}		$I_{OUT} = 10\text{ mA}$, $NCx\text{ or }NOx = 0.9\text{ V}$	1.65	10			Typ	Ω
R_{ON}		$I_{OUT} = 10\text{ mA}$, $NCx\text{ or }NOx = 0.9\text{ V}$	1.65	15	18	18	Max	Ω
ΔR_{ON}	Maximum On Resistance	$I_{OUT} = 10\text{ mA}$, $NCx\text{ or }NOx = 0.9\text{ V}$	1.65	5	7	7	Max	Ω
$I_{NO(OFF)}$, $I_{NC(OFF)}$	Switch OFF Leakage Current on B0, B1	$COMx = 0\text{ V, }1.95\text{ V}$, $NCx\text{ or }NOx = 1.95\text{ V, }0\text{ V}$	1.95	±10	±25	±50	Max	nA
$I_{A(OFF)}$	Switch OFF Leakage Current on A	$COMx = 0\text{ V, }1.95\text{ V}$, $NCx\text{ or }NOx = 1.95\text{ V, }0\text{ V}$	1.95	±10	±50	±100	Max	nA
$I_{A(ON)}$	Switch ON Leakage Current on A	$COMx = 0\text{ V, }1.95\text{ V}$, $NCx\text{ or }NOx = 0\text{ V, }1.95\text{ V}$, or floating	1.95	±10	±50	±100	Max	nA
Dynamic Characteristics								
t_{PHL} , t_{PLH}	Switch IN to OUT Time	$NCx\text{ or }NOx = 1.0\text{ V}$, $R_L = 50\text{ Ω}$, $C_L = 35\text{ pF}$, Figure 7	1.65	10			Typ	ns
t_{ON}	Switch Turn-on Time	$NCx\text{ or }NOx = 1.0\text{ V}$, $R_L = 50\text{ Ω}$, $C_L = 35\text{ pF}$, Figure 7	1.65	80			Typ	ns
t_{OFF}	Switch Turn-off Time	$NCx\text{ or }NOx = 1.0\text{ V}$, $R_L = 50\text{ Ω}$, $C_L = 35\text{ pF}$, Figure 7	1.65	55			Typ	ns
t_B	Break-Before-Make Time	$NCx\text{ or }NOx = 1.0\text{ V}$, $R_L = 50\text{ Ω}$, $C_L = 35\text{ pF}$, Figure 8	1.65	20			Typ	ns
Q	Charge Injection	$C_L = 1.0\text{ nF}$, $V_{GEN} = 0\text{ V}$, $R_{GEN} = 0\text{ Ω}$, Figure 9	1.8	20			Typ	pC
	OFF-Isolation	$f = 1\text{ MHz}$, $R_L = 50\text{ Ω}$, Figure 10	1.8	-65			Typ	dB
	Crosstalk	$f = 1\text{ MHz}$, $R_L = 50\text{ Ω}$, Figure 11	1.8	-65			Typ	dB

Low-Voltage 1- Ω SPDT Analog Switch

Symbol	Parameter	Conditions	V _{CC} (V)	25°C	-40°C to 85°C	-40°C to 125°C	Limit	Unit
	Channel-to-Channel Crosstalk	f = 1 MHz, Figure 12	1.8	-120			Typ	dB
BW	Bandwidth	R _L = 50 Ω	1.8	100			Typ	MHz
THD	Total Harmonic Distortion	R _L = 600 Ω , V _{IN} = 0.5 V _{PP} , f = 20 Hz to 20 kHz	1.8	0.01			Typ	%

Electrical Characteristics (Continued)

All test conditions: $T_{COMx} = 0^{\circ}\text{C}$ to 50°C , unless otherwise noted.

Symbol	Parameter	Conditions	V _{CC} (V)	Spec	Limit	Unit
I _{NO(OFF)} , I _{NC(OFF)}	Switch OFF Leakage Current on B0, B1	COMx = 1 V, 4.5 V, NCx or NOx = 4.5 V, 1 V	3.6	±10	Max	nA
I _{A(OFF)}	Switch OFF Leakage Current on A	COMx = 1 V, 4.5 V, NCx or NOx = 4.5 V, 1 V	3.6	±20	Max	nA
I _{A(ON)}	Switch ON Leakage Current on A	COMx = 1 V, 4.5 V, NCx or NOx = 1 V, 4.5 V, or floating	3.6	±20	Max	nA
I _{NO(OFF)} , I _{NC(OFF)}	Switch OFF Leakage Current on B0, B1	COMx = 1 V, 4.5 V, NCx or NOx = 4.5 V, 1 V	5.5	±10	Max	nA
I _{A(OFF)}	Switch OFF Leakage Current on A	COMx = 1 V, 4.5 V, NCx or NOx = 4.5 V, 1 V	5.5	±20	Max	nA
I _{A(ON)}	Switch ON Leakage Current on A	COMx = 1 V, 4.5 V, NCx or NOx = 1 V, 4.5 V, or floating	5.5	±20	Max	nA

Typical Performance Characteristics

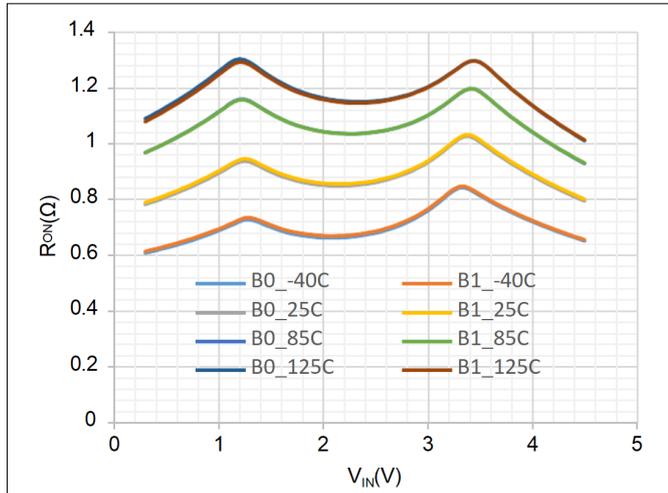


Figure 1. RON, V_{CC} = 4.5 V, Temp = -40, 25, 85, 125°C

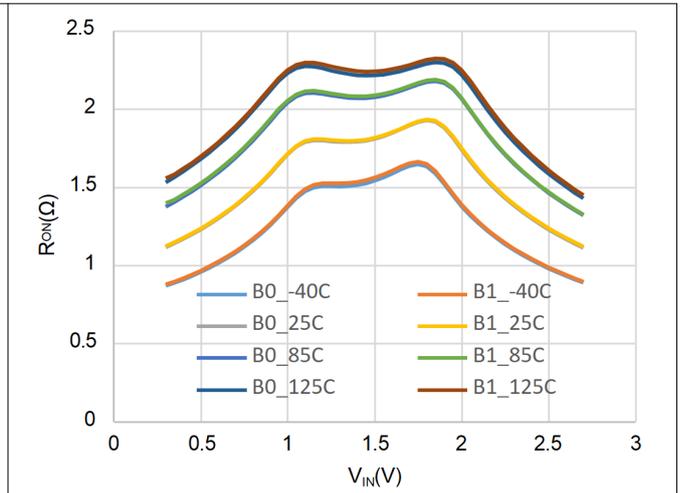


Figure 2. RON, V_{CC} = 2.7 V, Temp = -40, 25, 85, 125°C

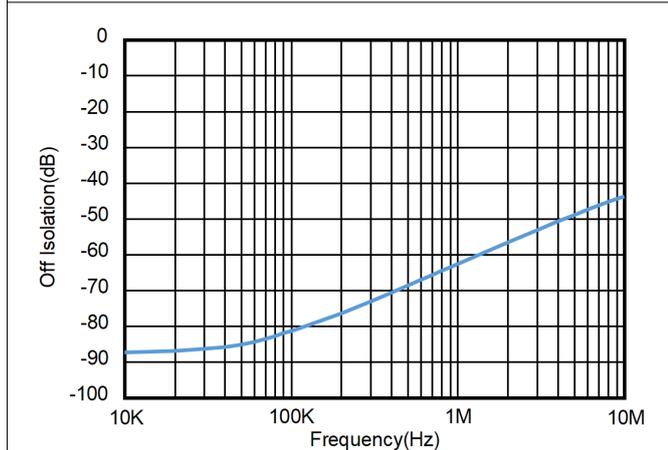


Figure 3. Off-Isolation, V_{CC} = 4.5 V

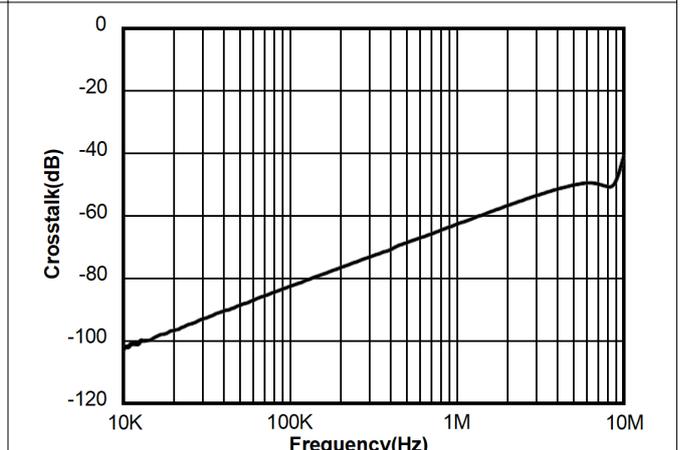


Figure 4. Crosstalk, V_{CC} = 4.5 V

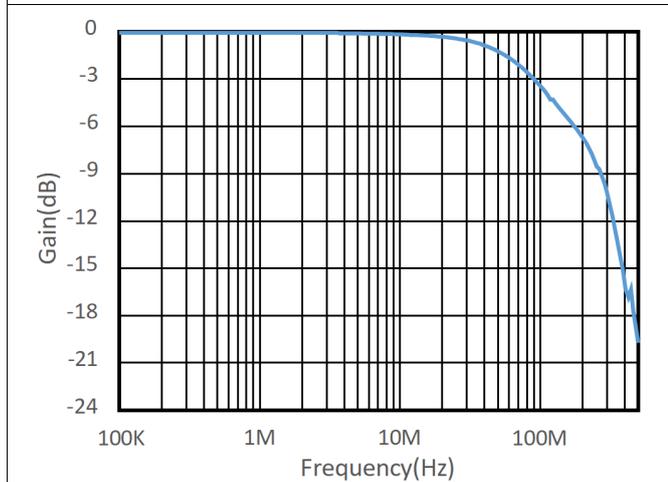


Figure 5. Bandwidth, V_{CC} = 4.5 V

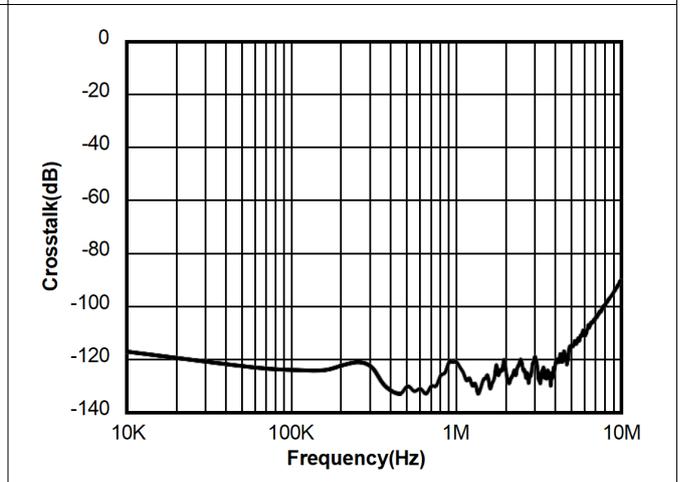


Figure 6. Channel-to-Channel Crosstalk, V_{CC} = 4.5 V

Test Circuit and Waveforms

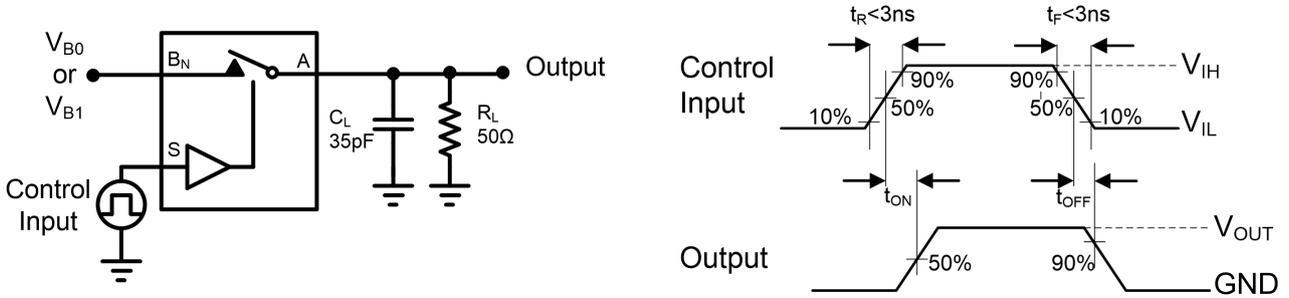


Figure 7. AC Test Circuit and Test Waveforms

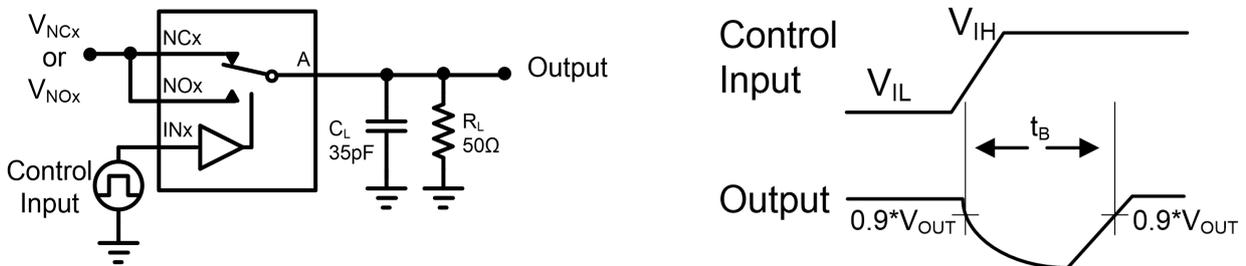


Figure 8. Switch Break Time

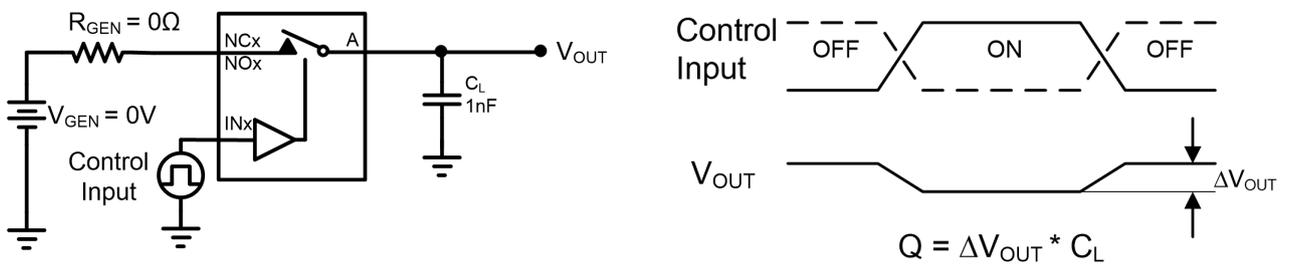


Figure 9. Charge Injection

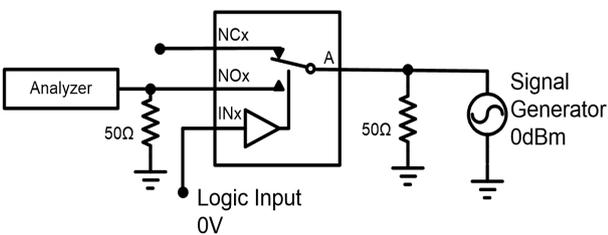


Figure 10. Off Isolation

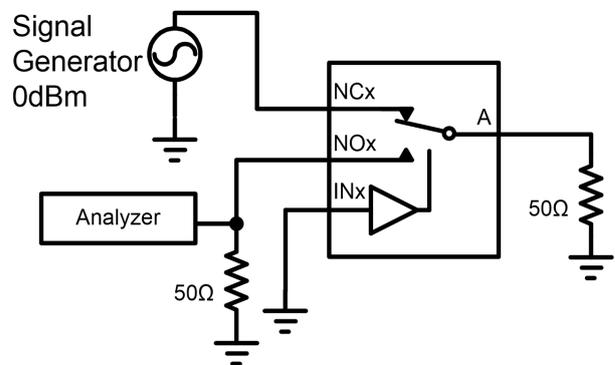
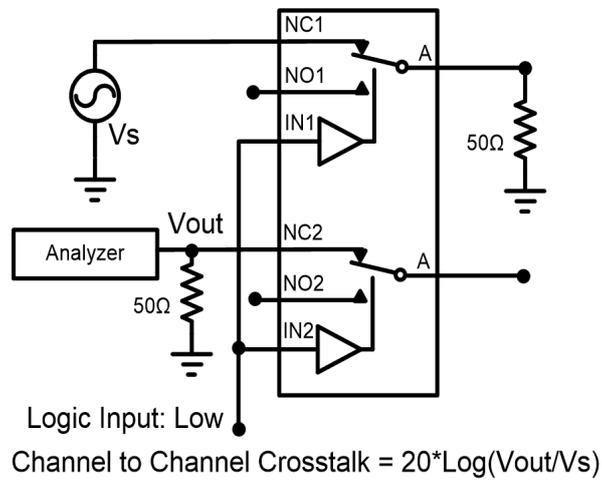


Figure 11. Crosstalk

Low-Voltage 1-Ω SPDT Analog Switch**Figure 12. Channel-to-Channel Crosstalk, NC1 to NC2**

Application and Implementation



Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

Application Information

A 0.1-μF bypass capacitor on V_{CC} and GND is recommended to prevent power disturbance.


Tape and Reel Information

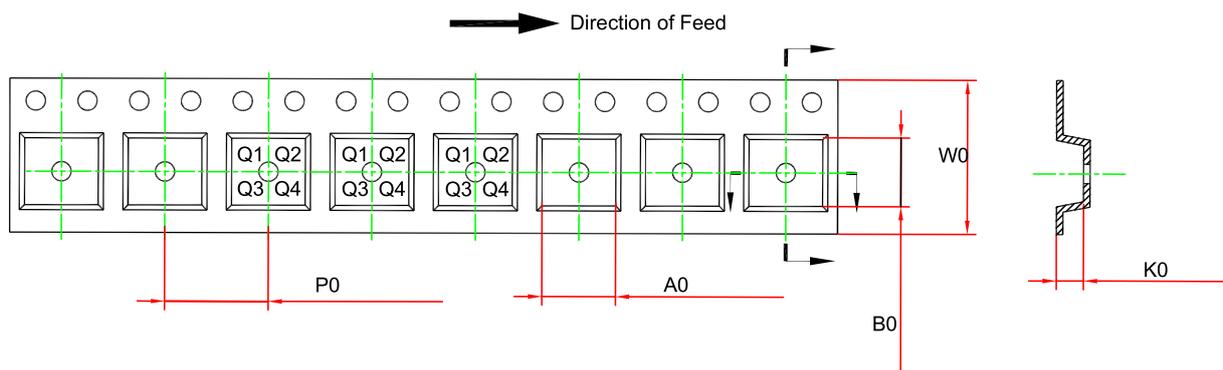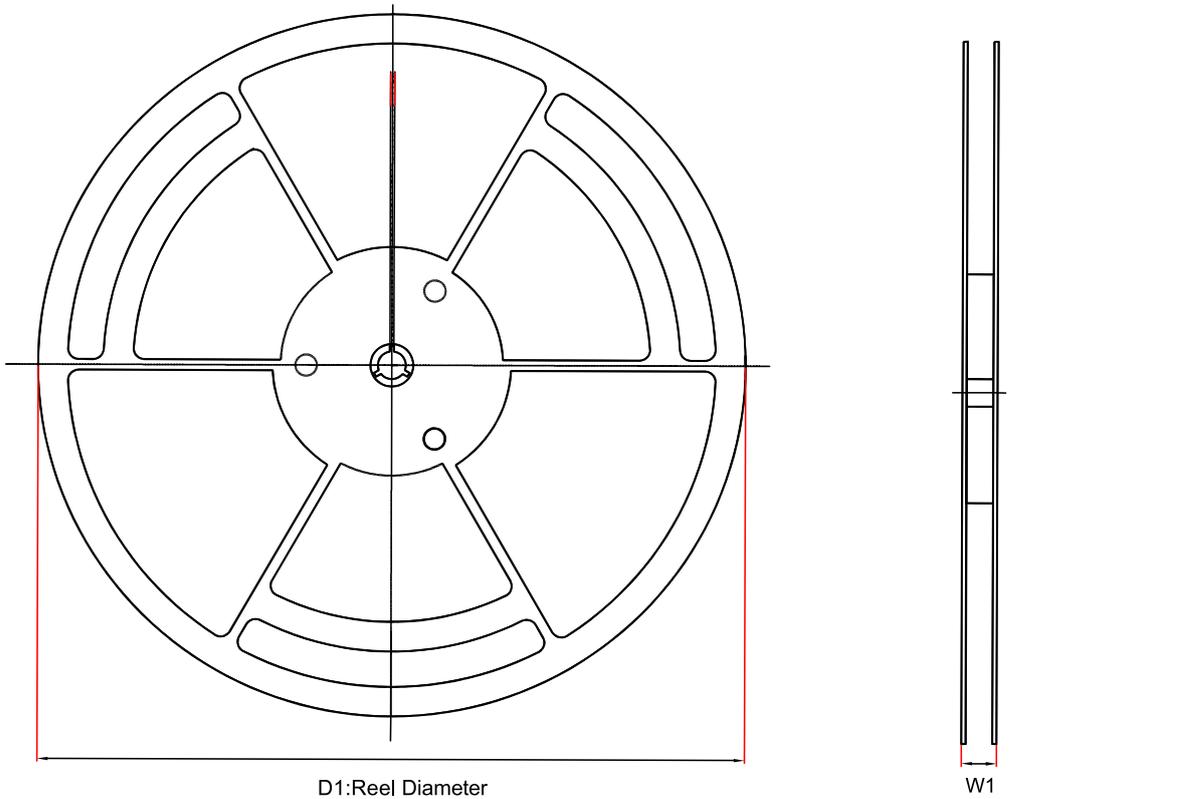

Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPW3223-FR	QFN1.4X1.8-10	180	13.1	1.6	2.0	0.85	4	8	Q1

Package Outline Dimensions

QFN1.4X1.8-10

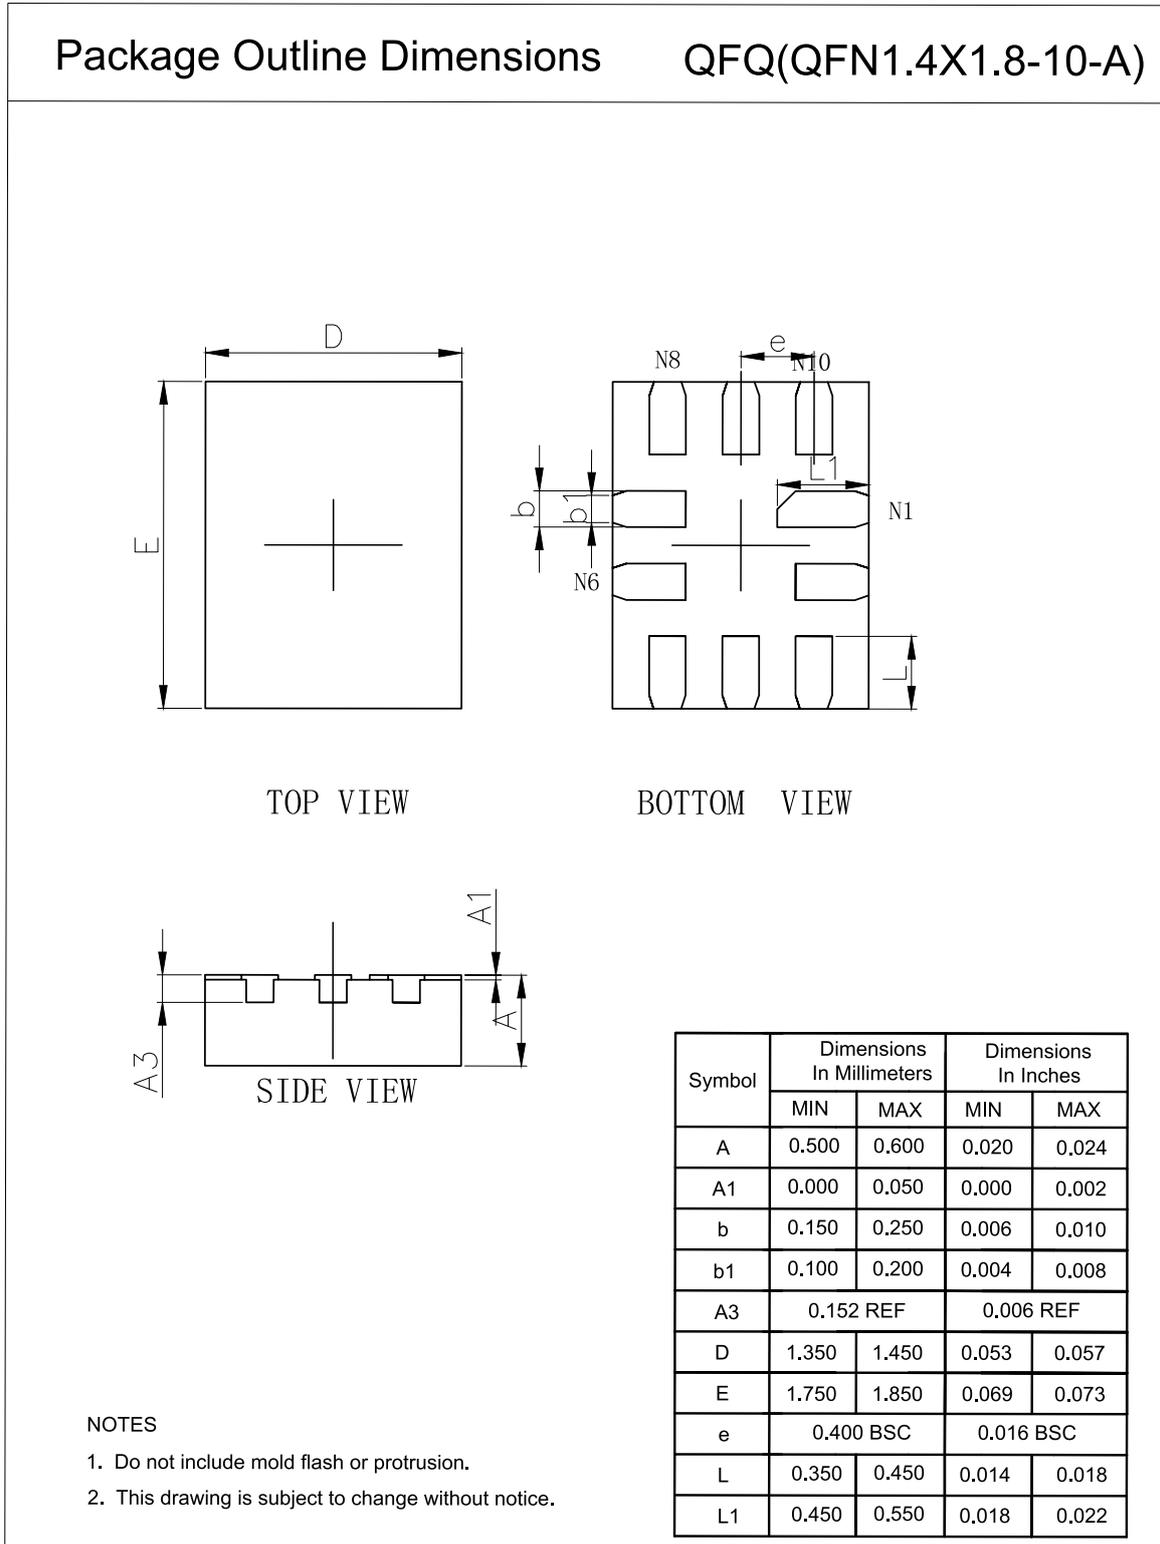

Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPW3223-FR	-40 to 125°C	QFN1.4X1.8-10	W32	3	Tape and Reel, 4000	Green

Green: 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

IMPORTANT NOTICE AND DISCLAIMER

Copyright© 3PEAK 2012-2024. All rights reserved.

Trademarks. Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

Performance Information. Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

Disclaimer. 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.