

## Features

- Wide Single-Supply Voltage Range or Dual Supplies: +2.5 V to +36 V or  $\pm 1.25$  V to  $\pm 18$  V
- Very Low Supply Current: 150  $\mu$ A/ch
- Low Input Bias Current: 1 nA (Max)
- Low Offset Voltage:  $\pm 6.0$  mV (Max)
- Input Common-Mode Voltage Range Includes Ground
- Internal Differential Input Voltage Range Equal to The Supply Voltage
- Low Output Saturation
- Operating Temperature Range:  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$
- ESD Rating: 4-kV HBM, 2-kV CDM

## Applications


- High-Speed Line or Digital Line Receivers
- High-Speed Sampling Circuits
- Peak and Zero-Crossing Detectors
- Threshold Detectors/Discriminators
- Sensing at Ground or Supply Line

## Description

The devices in this series consist of single/ dual/ quad independent single- or dual-supply voltage comparators on a single monolithic substrate. The common-mode input voltage range includes ground even when operated from a single supply, and the low power supply current drain makes these comparators suitable for battery operation. These types are designed to directly interface with TTL and CMOS. Current drain is independent of the supply voltage. The outputs can be connected to other open-collector outputs to achieve wired-AND relationships.

All devices are specified for the temperature range from  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ .

## Typical Application Circuit

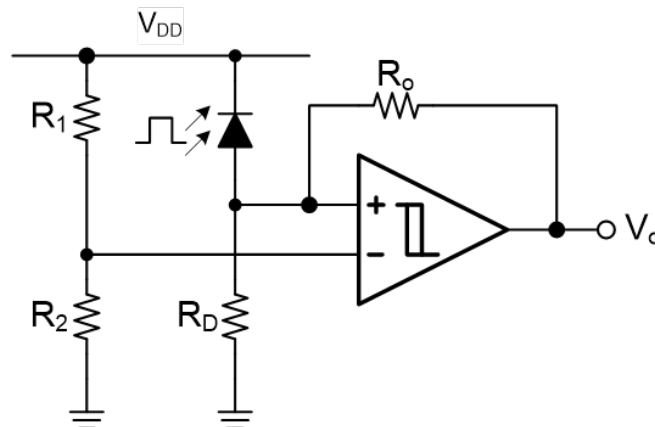


## Table of Contents

<b>Features.....</b>	<b>1</b>
<b>Applications.....</b>	<b>1</b>
<b>Description.....</b>	<b>1</b>
<b>Typical Application Circuit.....</b>	<b>1</b>
<b>Revision History.....</b>	<b>3</b>
<b>Pin Configuration and Functions.....</b>	<b>4</b>
<b>Specifications.....</b>	<b>7</b>
Absolute Maximum Ratings <sup>(1)</sup> .....	7
ESD, Electrostatic Discharge Protection.....	7
Thermal Information.....	7
Electrical Characteristics .....	8
Typical Performance Characteristics.....	9
<b>Detailed Description.....</b>	<b>10</b>
Overview.....	10
<b>Application and Implementation.....</b>	<b>11</b>
Application Information.....	11
Typical Application.....	12
<b>Tape and Reel Information.....</b>	<b>13</b>
<b>Package Outline Dimensions.....</b>	<b>14</b>
SOT23-5.....	14
SOP8.....	15
TSSOP8.....	16
DFN2X2-8.....	17
SOP14.....	18
TSSOP14.....	19
<b>Order Information.....</b>	<b>20</b>
<b>IMPORTANT NOTICE AND DISCLAIMER.....</b>	<b>21</b>

## Revision History


Date	Revision	Notes
2022-05-05	Rev.A.0	Updated the document format. Updated the format of Package Outline Dimensions, with no change on the product. Combined LM331A, LM393A, LM339A to one datasheet. Updated the Electrical Characteristics: <ul style="list-style-type: none"><li>• <math>I_B</math>: added the max value of 1 nA at 25 °C, and 10 nA at -40°C to 125°C;</li><li>• <math>I_{OS}</math>: added the max value of 1 nA at 25 °C, and 10 nA at -40°C to 125°C;</li><li>• <math>I_{OS}</math>: added the typical value of 50 nA at 25 °C.</li></ul>
2023-05-29	Rev.A.1	The following updates are all about the new datasheet formats or typos, and the actual product remains unchanged. <ul style="list-style-type: none"><li>• Updated the symbol of Figure 3 in Typical Performance Characteristics.</li><li>• Updated the website address.</li><li>• Updated Tape and Reel Information.</li><li>• Updated DFN2X2-8 Package Outline Dimensions.</li></ul>
2024-12-18	Rev.A.2	The following updates are all about the new datasheet formats or typos, and the actual product remains unchanged. <ul style="list-style-type: none"><li>• Updated to a new datasheet format.</li><li>• Updated to a new format of Package Outline Dimensions.</li><li>• Updated the Tape and Reel Information.</li></ul>
2025-01-13	Rev.A.3	Corrected the typo of the pin map for the LM331A SOT23-5, and the actual product remains unchanged.

### Pin Configuration and Functions

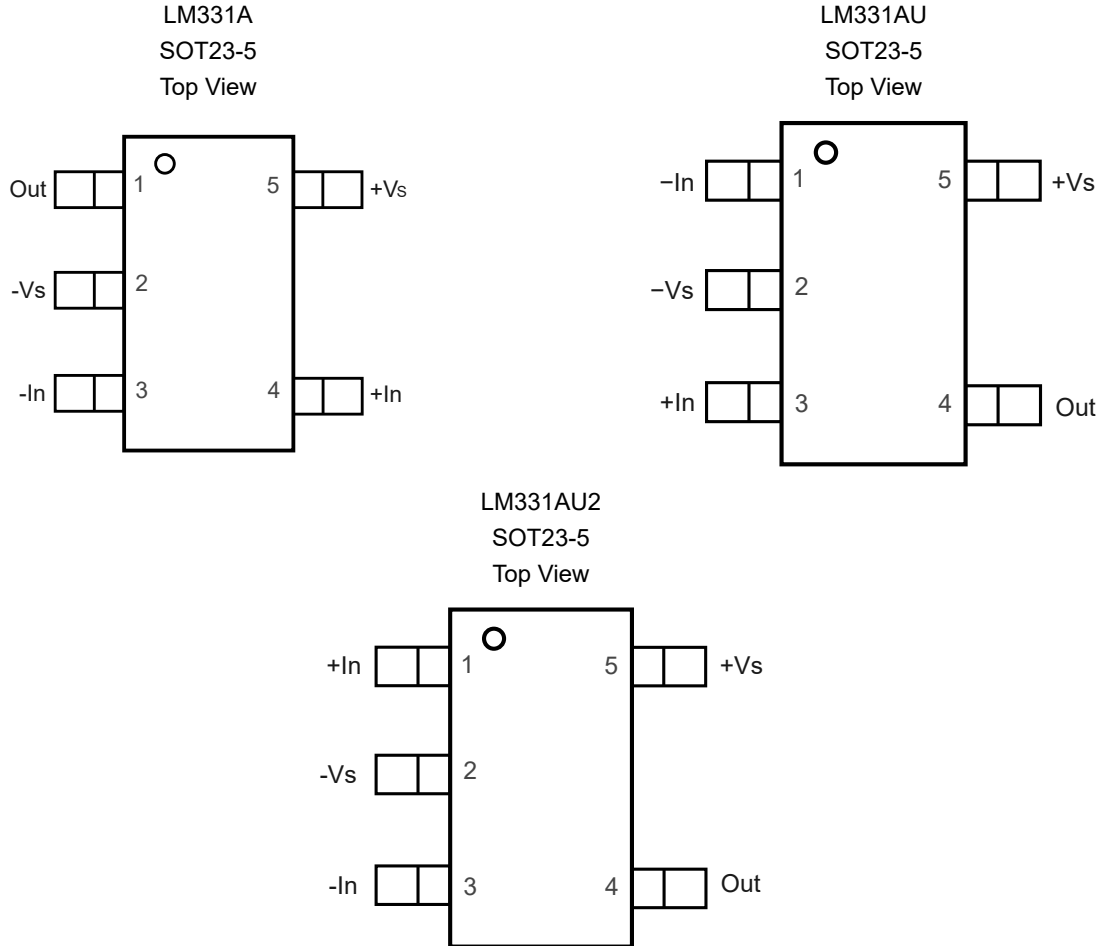


**Table 1. Pin Functions: LM331A/LM331AU/LM331AU2**

Pin No.			Name	I/O	Description
LM331A	LM331AU	LM331AU2			
3	1	3	-In	I	Inverting input
2	2	2	-Vs		Negative power supply
4	3	1	+In	I	Non-inverting input
1	4	4	Out	O	Output
5	5	5	+Vs		Positive power supply

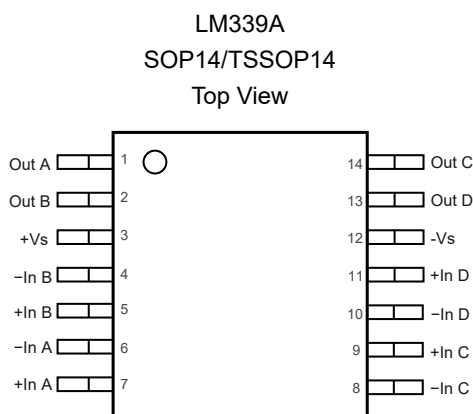

**Table 2. Pin Functions: LM339A**

Pin No.	Name	I/O	Description
1	Out A	O	Output
2	Out B	O	Output
3	+Vs		Positive power supply
4	-In B	I	Inverting input
5	+In B	I	Non-inverting input
6	-In A	I	Inverting input
7	+In A	I	Non-inverting input
8	-In C	I	Inverting input
9	+In C	I	Non-inverting input
10	-In D	I	Inverting input
11	+In D	I	Noninverting input
12	-Vs		Negative power supply
13	Out D	O	Output
14	Out C	O	Output

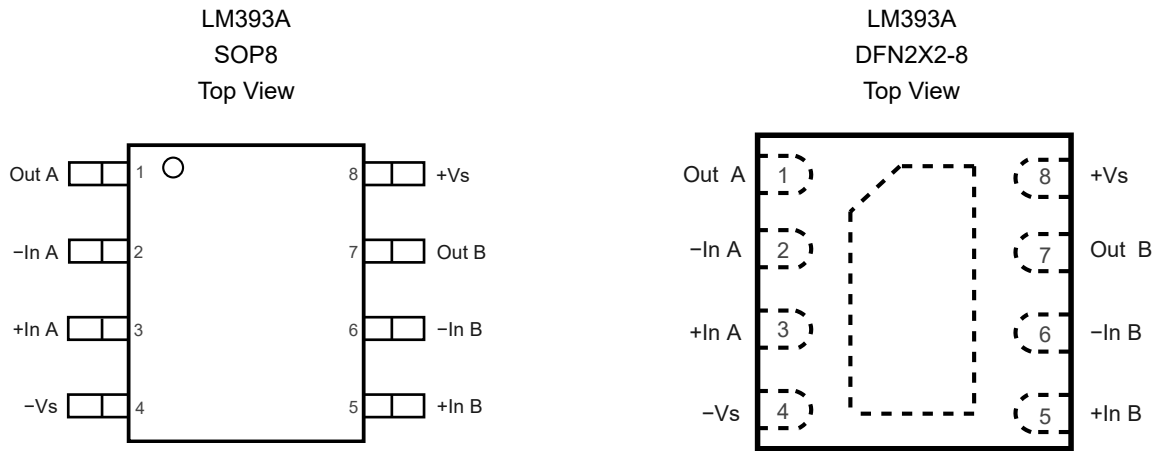

**Table 3. Pin Functions: LM393A**

Pin No.		Name	I/O	Description
SOP8	DFN2X2-8			
1	1	Out A	O	Output
2	2	-In A	I	Inverting input
3	3	+In A	I	Non-inverting input
4	4	-Vs		Negative power supply
5	5	+In B	I	Non-inverting input
6	6	-In B	I	Inverting input
7	7	Out B	O	Output
8	8	+Vs		Positive power supply
		Thermal Pad		The thermal pad of the DFN2X2-8 is recommended to be left float or connected to -Vs.

## Specifications

### Absolute Maximum Ratings <sup>(1)</sup>

Parameters		Min	Max	Unit
	Supply Voltage: (+V <sub>S</sub> ) – (–V <sub>S</sub> )		42	V
	Voltage on Input and Output Pins	(–V <sub>S</sub> ) – 0.3	(+V <sub>S</sub> ) + 0.3	V
	Input Current: +IN, –IN <sup>(2)</sup>	–20	20	mA
	Output Current: Out	–20	20	mA
	Output Short-Circuit Duration <sup>(3)</sup>		Infinite	
	Current at Supply Pins	–60	60	mA
T <sub>J</sub>	Maximum Junction Temperature		150	°C
T <sub>A</sub>	Operating Temperature Range	–40	125	°C
T <sub>STG</sub>	Storage Temperature Range	–65	150	°C
T <sub>L</sub>	Lead Temperature (Soldering 10 sec)		260	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

(2) The inputs are protected by ESD protection diodes to each power supply. If the input extends more than 500 mV beyond the power supply, the input current should be limited to less than 10 mA.

(3) A heat sink may be required to keep the junction temperature below the absolute maximum. This depends on the power supply voltage and how many amplifiers are shorted. Thermal resistance varies with the amount of PC board metal connected to the package. The specified values are for short traces connected to the leads.

### ESD, Electrostatic Discharge Protection

Symbol	Parameter	Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	4	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 <sup>(2)</sup>	2	kV

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### Thermal Information

Package Type	θ <sub>JA</sub>	θ <sub>Jc</sub>	Unit
SOT23-5	250	81	°C/W
SOP8	158	43	°C/W
TSSOP8	191	44	°C/W
DFN2X2-8	100	60	°C/W
SOP14	97	47	°C/W
TSSOP14	108	43	°C/W

### Electrical Characteristics

All test conditions:  $V_{CC} = 5\text{ V}$ ,  $R_{PU} = 10\text{ k}\Omega$ ,  $C_L = 15\text{ pF}$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise noted.


Symbol	Parameter	Conditions		Min	Typ	Max	Unit
$V_{CC}$	Supply Voltage	$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$		2.5		36	V
$V_{OS}$	Input Offset Voltage	$V_{CC} = 5\text{ V}$ to $30\text{ V}$ , $V_{CM} = 0\text{ V}$ , $V_O = 1.4\text{ V}$ , $T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$		-6	$\pm 0.6$	6	mV
$I_B$	Input Bias Current <sup>(1)</sup>	$V_{DM} = 0\text{ V}$ , $V_{CM} = 0\text{ V}$			0.1	1	nA
		$V_{DM} = 0\text{ V}$ , $V_{CM} = 0\text{ V}$ , $T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$			1	10	nA
$I_{OS}$	Input Offset Current <sup>(1)</sup>	$V_{DM} = 0\text{ V}$ , $V_{CM} = 0\text{ V}$			0.1	1	nA
		$V_{DM} = 0\text{ V}$ , $V_{CM} = 0\text{ V}$ , $T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$			1	10	nA
$I_{Diff}$	Input Differential Current	$V_{CC} = 36\text{ V}$ , $V_{DM} = 36\text{ V}$			50		nA
$C_{IN}$	Input Capacitance	$T_A = 25^\circ\text{C}$	Differential mode		2.5		pF
			Common mode		5		
$V_{CM}$	Common-Mode Input Voltage Range			0		$V_{CC} - 1.5$	V
		$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$		0		$V_{CC} - 2$	V
$A_{VD}$	Large-Signal Differential-Voltage Amplification	$V_{CC} = 15\text{ V}$ , $V_O = 1.4\text{ V}$ to $11.4\text{ V}$ , $R_L \geq 15\text{ k}\Omega$ to $V_{CC}$		50	400		V/mV
$I_{OH}$	High-Level Output Current	$V_{OH} = 5\text{ V}$ , $V_{ID} = 1\text{ V}$			25	200	nA
		$V_{CC} = 36\text{ V}$ , $V_{OH} = 36\text{ V}$ , $V_{ID} = 1\text{ V}$ , $T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$				7	$\mu\text{A}$
$V_{OL}$	Low-Level Output Voltage	$I_{OL} = 4\text{ mA}$ , $V_{ID} = -1\text{ V}$			250	400	mV
		$I_{OL} = 4\text{ mA}$ , $V_{ID} = -1\text{ V}$ , $T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$				500	mV
$I_{OL}$	Low-Level Output Current	$V_{OL} = 1.5\text{ V}$ , $V_{ID} = -1\text{ V}$		10			mA
$I_Q$	Quiescent Current per Comparator	$V_{CC} = 5\text{ V}$			150	300	$\mu\text{A}$
		$V_{CC} = 36\text{ V}$			150	300	$\mu\text{A}$
$t_{RT}$	Response Time	$R_L$ connected to $5\text{ V}$ through $5.1\text{ k}\Omega$ , $C_L = 15\text{ pF}$	100-mV input step with 5-mV overdrive		2		$\mu\text{s}$
			TTL-level input step		0.5		

(1) Provided by bench tests and design simulation.




### Typical Performance Characteristics


All test conditions:  $V_S = 5\text{ V}$ ,  $V_{CM} = 0\text{ V}$ ,  $R_L = \text{Open}$ , unless otherwise noted.

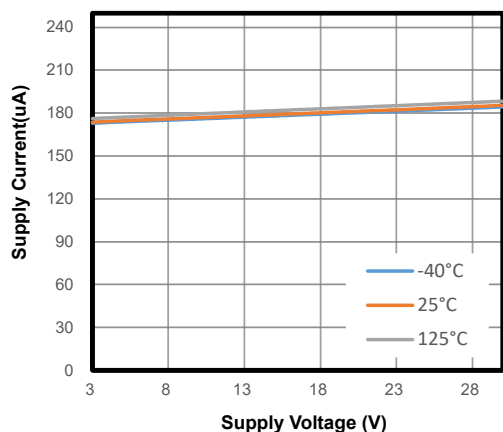


**Figure 1. Supply Current vs. Supply Voltage (Dual Channel)**

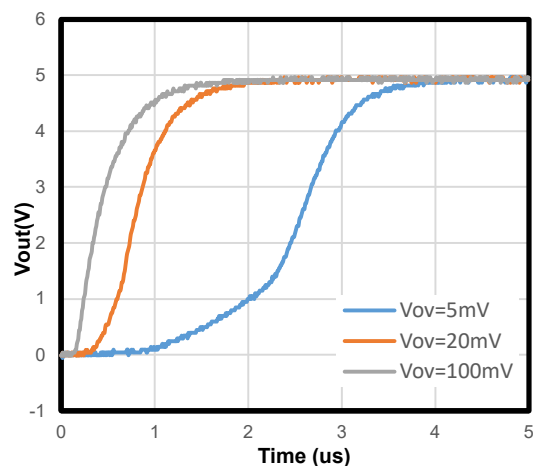

**Figure 2. Response Time for Various Input Overdrives: Positive Transition**

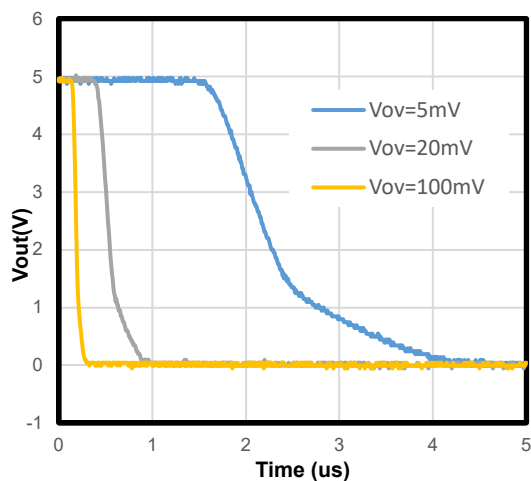

**Figure 3. Response Time for Various Input Overdrives: Negative Transition**

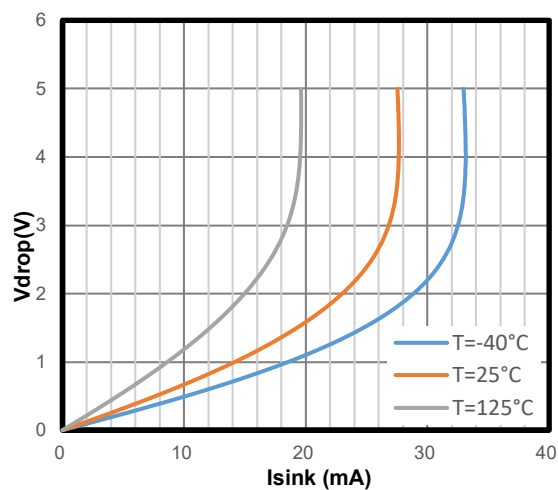

**Figure 4. Negative Output Swing vs. Sink Current**

## Detailed Description

### Overview

The devices in this series consist of single/ dual/ quad independent single- or dual-supply voltage comparators on a single monolithic substrate. The common-mode input voltage range includes ground even when operated from a single supply, and the low power supply current drain makes these comparators suitable for battery operation. These types are designed to directly interface with TTL and CMOS. Current drain is independent of the supply voltage. The outputs can be connected to other open-collector outputs to achieve wired-AND relationships.

## Application and Implementation

### Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

## Application Information

### Power Supply Layout and Bypass

The power supply pins of the LM331A/393A/339A series should have a local bypass capacitor (i.e., 0.01  $\mu\text{F}$  to 0.1  $\mu\text{F}$ ) within 2 mm for high-frequency performance. It can also use a bulk capacitor (i.e., 1  $\mu\text{F}$  or larger) within 100 mm to provide large, slow currents. This bulk capacitor can be shared with other analog parts.

A good ground layout improves performance by decreasing the amount of stray capacitance and noise at the inputs and outputs of the comparator. To decrease stray capacitance, minimize PCB lengths and resistor leads, and place external components to the comparator pins as close as possible.

### Inputs

The electrostatic discharge (ESD) protection input structure of two back-to-back diodes and 1-k $\Omega$  series resistors are used to limit the differential input voltage applied to the precision input of the comparator by clamping input voltages that exceed supply voltages, as shown in [Figure 5](#). Large voltage exceeding the supply voltage should be avoided to prevent damage to the input stage.

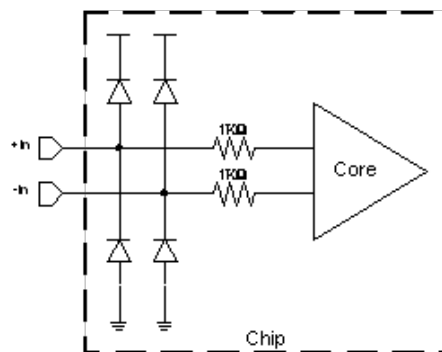


Figure 5. Equivalent Input Structure

### Operation Outside of the Common Input Voltage Range

A list of input voltage situation and their outcomes are as follows:

1. When both -IN and +IN are both within the common-mode range:
  - a. If -IN is higher than +IN and the offset voltage, the output is low, and the output MOSFET is sinking current.
  - b. If -IN is lower than +IN and the offset voltage, the output is high impedance.
2. When -IN is higher than common mode and +IN is within common mode, the output is low, and the output MOSFET is sinking current.
3. When +IN is higher than common mode and -IN is within common mode, the output is high impedance.
4. When -IN and +IN are both higher than common mode, the output is in uncertain state.

## Typical Application

### IR Receiver

The device is an ideal candidate to be used as an infrared receiver shown in [Figure 6](#). The infrared photo diode creates a current relative to the amount of infrared light present. The current creates a voltage across  $R_D$ . When this voltage level cross the voltage applied by the voltage divider to the inverting input, the output transitions. Optional  $R_O$  provides additional hysteresis for noise immunity.


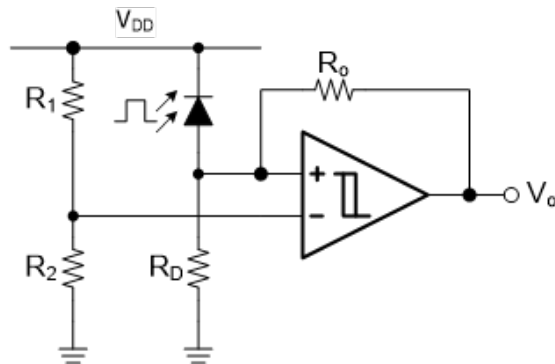


Figure 6. IR Receiver

### Tape and Reel Information

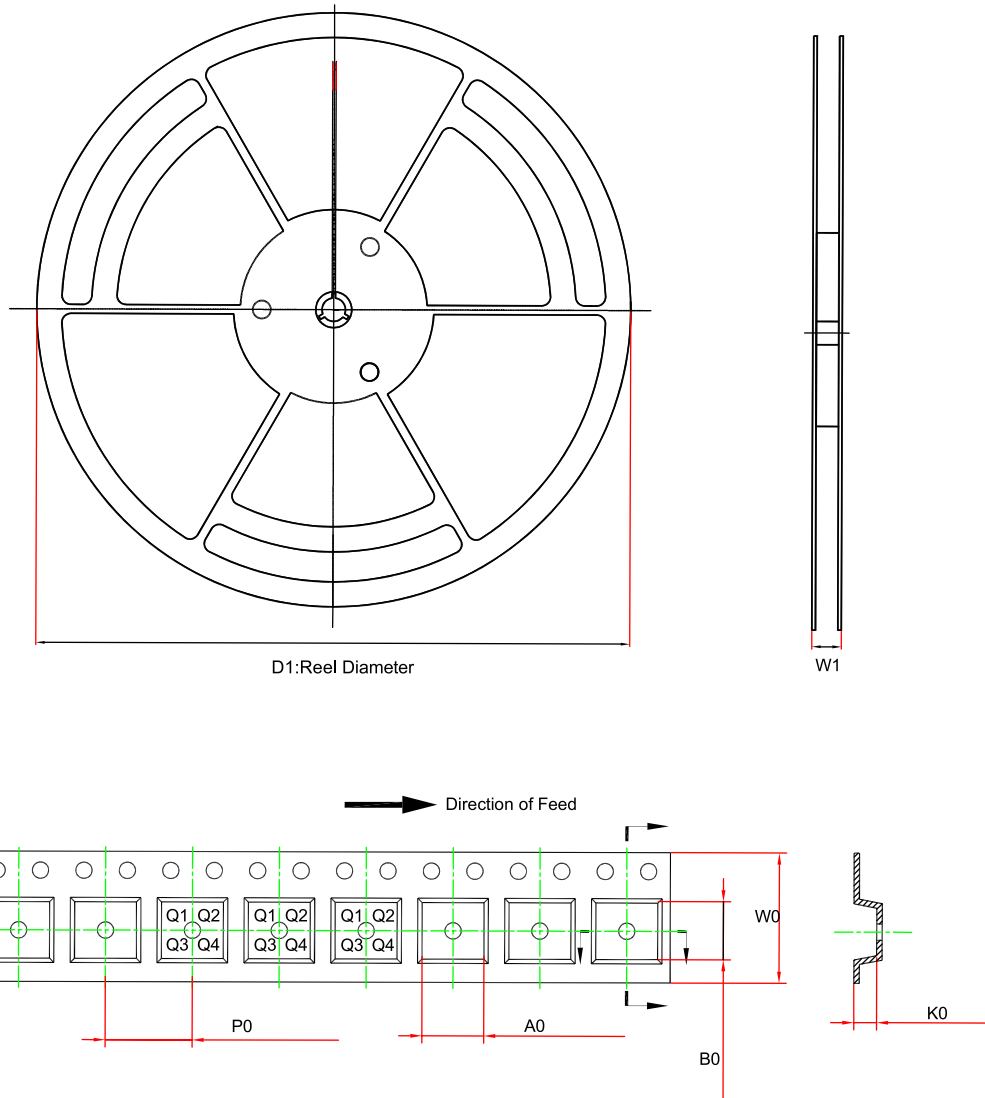



Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm) <sup>(1)</sup>	B0 (mm) <sup>(1)</sup>	K0 (mm) <sup>(1)</sup>	P0 (mm)	W0 (mm)	Pin1 Quadrant
LM331A-S5TR	SOT23-5	179.0	13.1	3.3	3.25	1.4	4.0	8.0	Q3
LM331AU-S5TR	SOT23-5	179.0	13.1	3.3	3.25	1.4	4.0	8.0	Q3
LM331AU2-S5TR	SOT23-5	179.0	13.1	3.3	3.25	1.4	4.0	8.0	Q3
LM393A-SR	SOP8	330.0	17.6	6.5	5.4	2.0	8.0	12.0	Q1
LM393A-DFGR	DFN2X2-8	180.0	12.0	2.2	2.2	1.0	4.0	8.0	Q2
LM393A-TSR	TSSOP8	330.0	17.6	6.8	3.3	1.8	8.0	12.0	Q1
LM339A-SR	SOP14	330.0	22.0	6.5	9.2	2.0	8.0	16.0	Q1
LM339A-TR	TSSOP14	330.0	17.6	6.8	5.5	1.6	8.0	12.0	Q1

(1) The value is for reference only. Contact the 3PEAK factory for more information.

### Package Outline Dimensions

#### SOT23-5

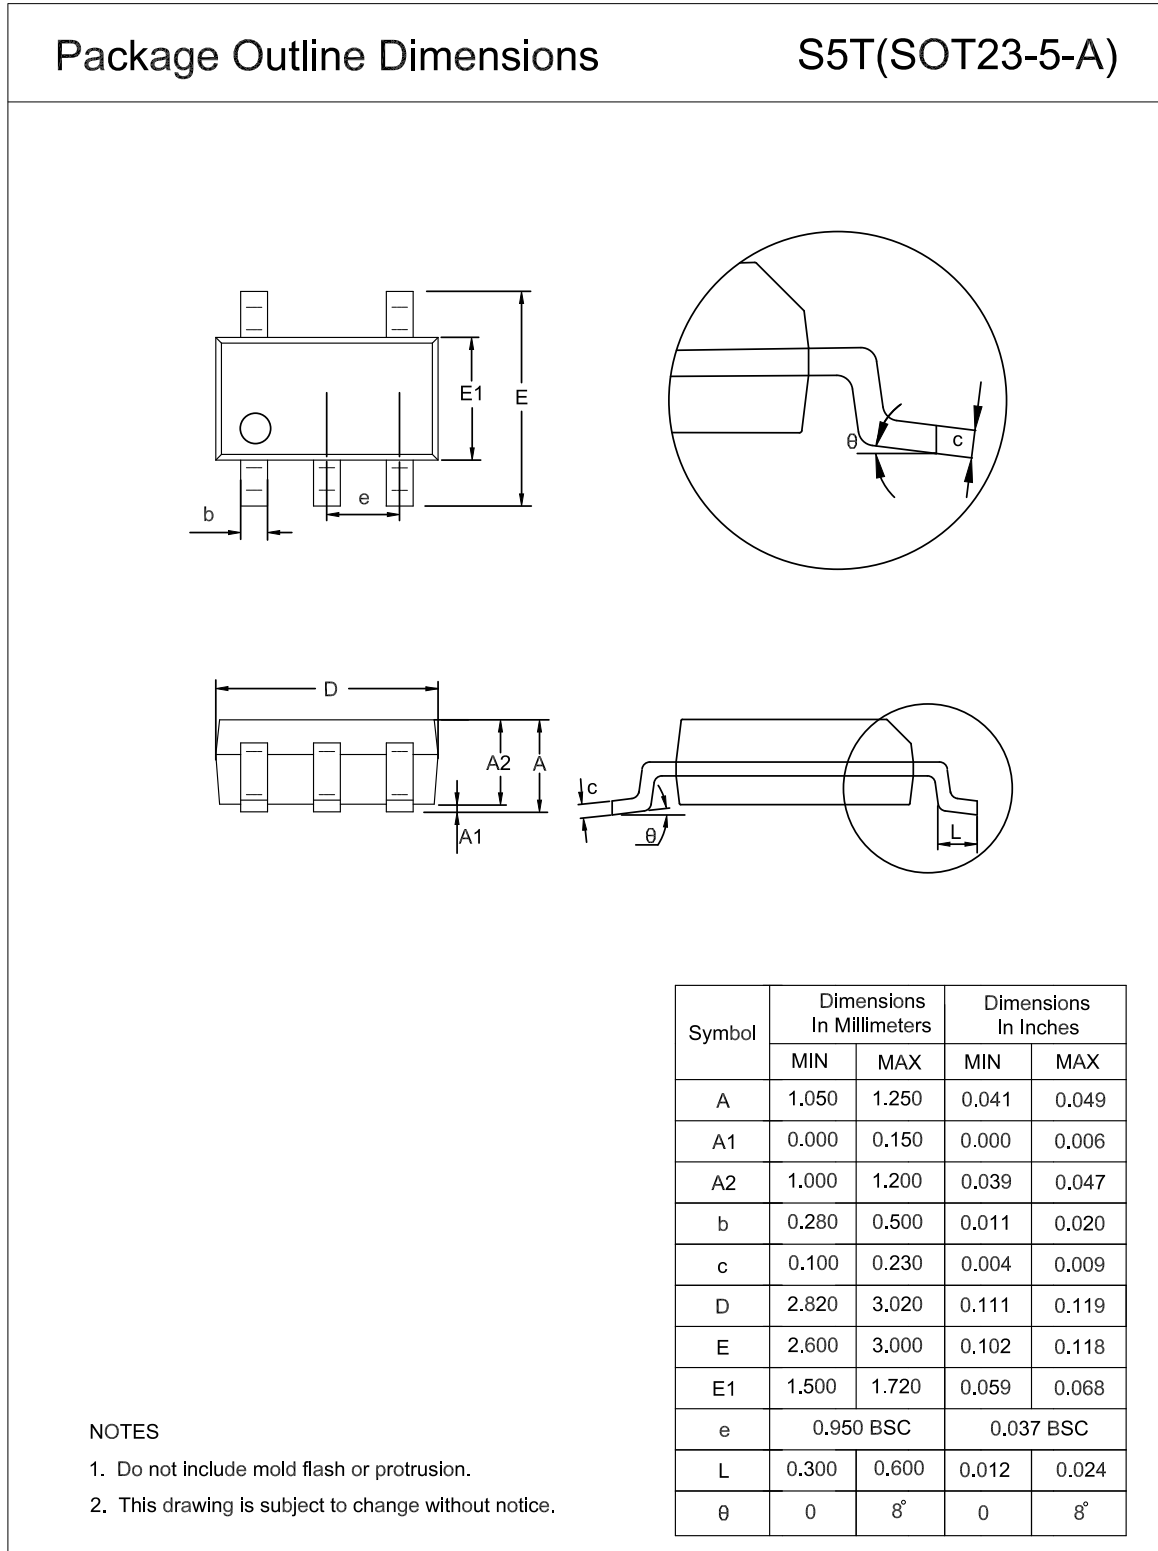


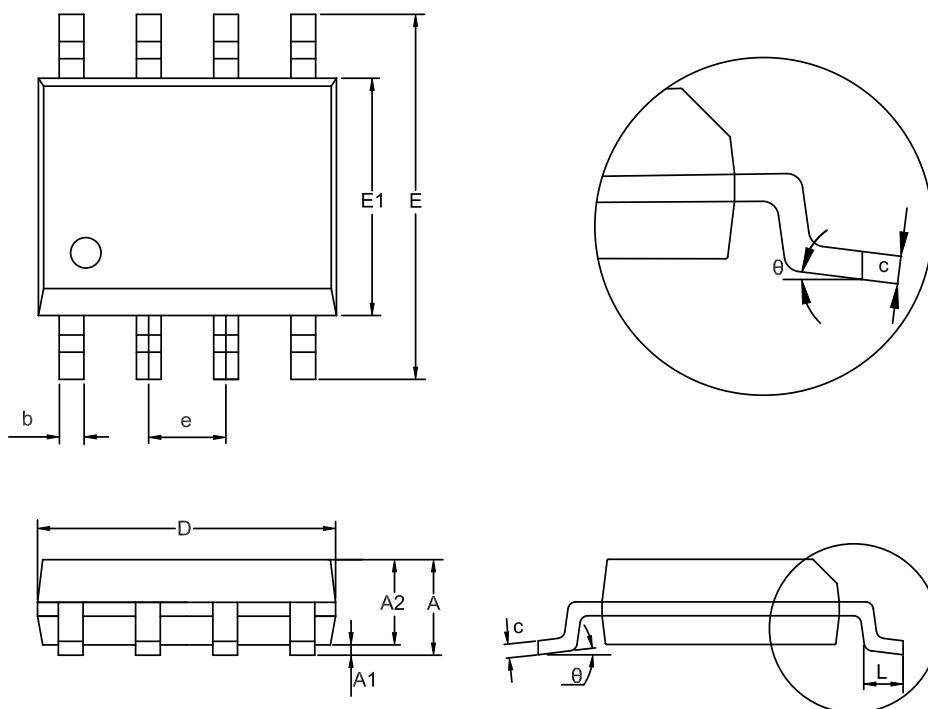**SOP8**
**Package Outline Dimensions**
**SO1(SOP-8-A)**


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.250	1.550	0.049	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.700	5.100	0.185	0.201
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270 BSC		0.050 BSC	
L	0.400	1.000	0.016	0.039
θ	0	8°	0	8°

**NOTES**

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

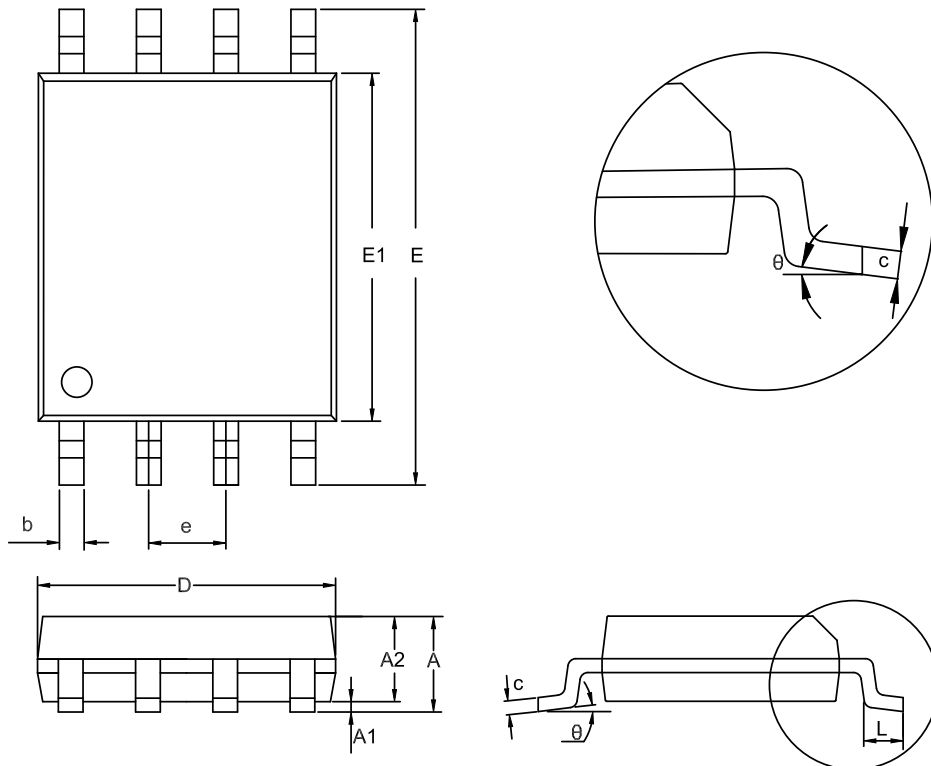**TSSOP8**
**Package Outline Dimensions**
**TS1(TSSOP-8-A)**

**NOTES**

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.900	1.200	0.035	0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
D	2.900	3.100	0.114	0.122
E	6.200	6.600	0.244	0.260
E1	4.300	4.500	0.169	0.177
e	0.650 BSC		0.026 BSC	
L	0.450	0.750	0.018	0.030
θ	0	8°	0	8°




**DFN2X2-8**

**Package Outline Dimensions**



**DFG(DFN2X2-8-E)**

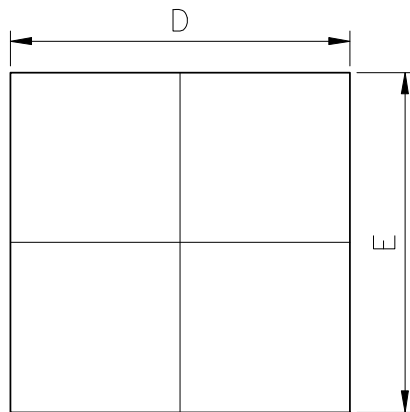

**Top View**

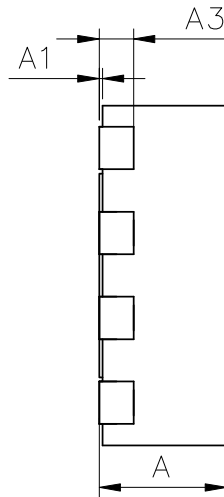

**Side View**



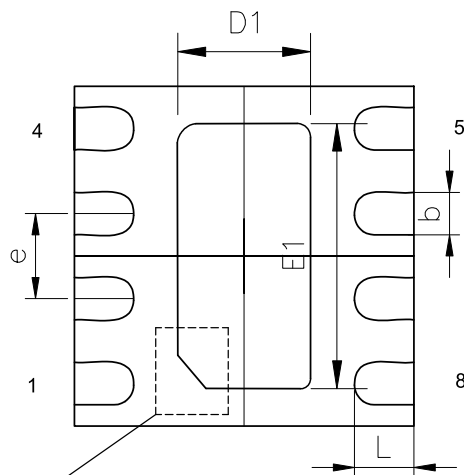


**Bottom View**

**NOTES**

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.
3. The many types of E-pad Pin1 signs may appear in the product.




Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.500	0.600	0.020	0.024
A1	0.000	0.050	0.000	0.002
b	0.150	0.300	0.006	0.012
A3	0.100	0.200	0.004	0.008
D	1.900	2.100	0.075	0.083
D1	0.800	1.000	0.031	0.039
E	1.900	2.100	0.075	0.083
E1	1.600	1.800	0.063	0.071
e	0.500 BSC		0.020BSC	
L	0.224	0.376	0.009	0.015

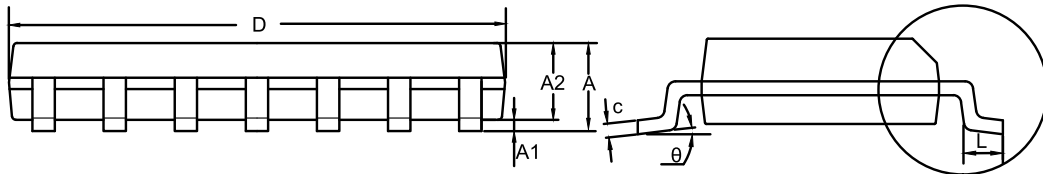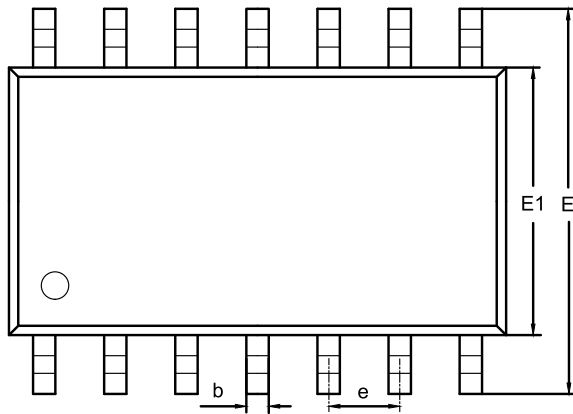**SOP14**
**Package Outline Dimensions**
**SO2(SOP-14-A)**


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.050	0.250	0.002	0.010
A2	1.250	1.650	0.049	0.065
b	0.310	0.510	0.012	0.020
c	0.100	0.250	0.004	0.010
D	8.450	8.850	0.333	0.348
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0	8°	0	8°

**NOTES**

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

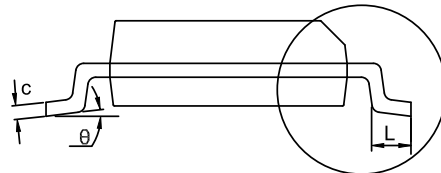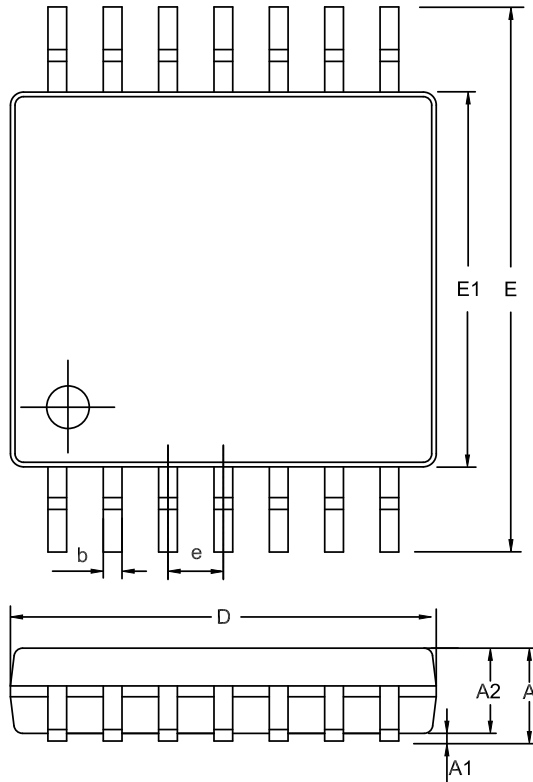**TSSOP14**
**Package Outline Dimensions**
**TS2(TSSOP-14-A)**


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.900	1.200	0.035	0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
D	4.900	5.100	0.193	0.201
E	6.200	6.600	0.244	0.260
E1	4.300	4.500	0.169	0.177
e	0.650 BSC		0.026 BSC	
L	0.450	0.750	0.018	0.030
θ	0	8°	0	8°

**NOTES**

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

**Order Information**

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
LM331A-S5TR	-40 to 125°C	SOT23-5	31A	3	Tape and Reel, 3000	Green
LM331AU-S5TR	-40 to 125°C	SOT23-5	CA4	3	Tape and Reel, 3000	Green
LM331AU2-S5TR	-40 to 125°C	SOT23-5	31V	3	Tape and Reel, 3000	Green
LM393A-SR	-40 to 125°C	SOP8	393A	3	Tape and Reel, 4000	Green
LM393A-DFGR	-40 to 125°C	DFN2X2-8	93A	3	Tape and Reel, 3000	Green
LM393A-TSR	-40 to 125°C	TSSOP8	393A	3	Tape and Reel, 3000	Green
LM339A-SR	-40 to 125°C	SOP14	LM339	3	Tape and Reel, 2500	Green
LM339A-TR	-40 to 125°C	TSSOP14	LM339	3	Tape and Reel, 3000	Green

**Green:** 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

## **IMPORTANT NOTICE AND DISCLAIMER**

**Copyright**© 3PEAK 2012-2025. All rights reserved.

**Trademarks.** Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

**Performance Information.** Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

**Disclaimer.** 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.

This page intentionally left blank